




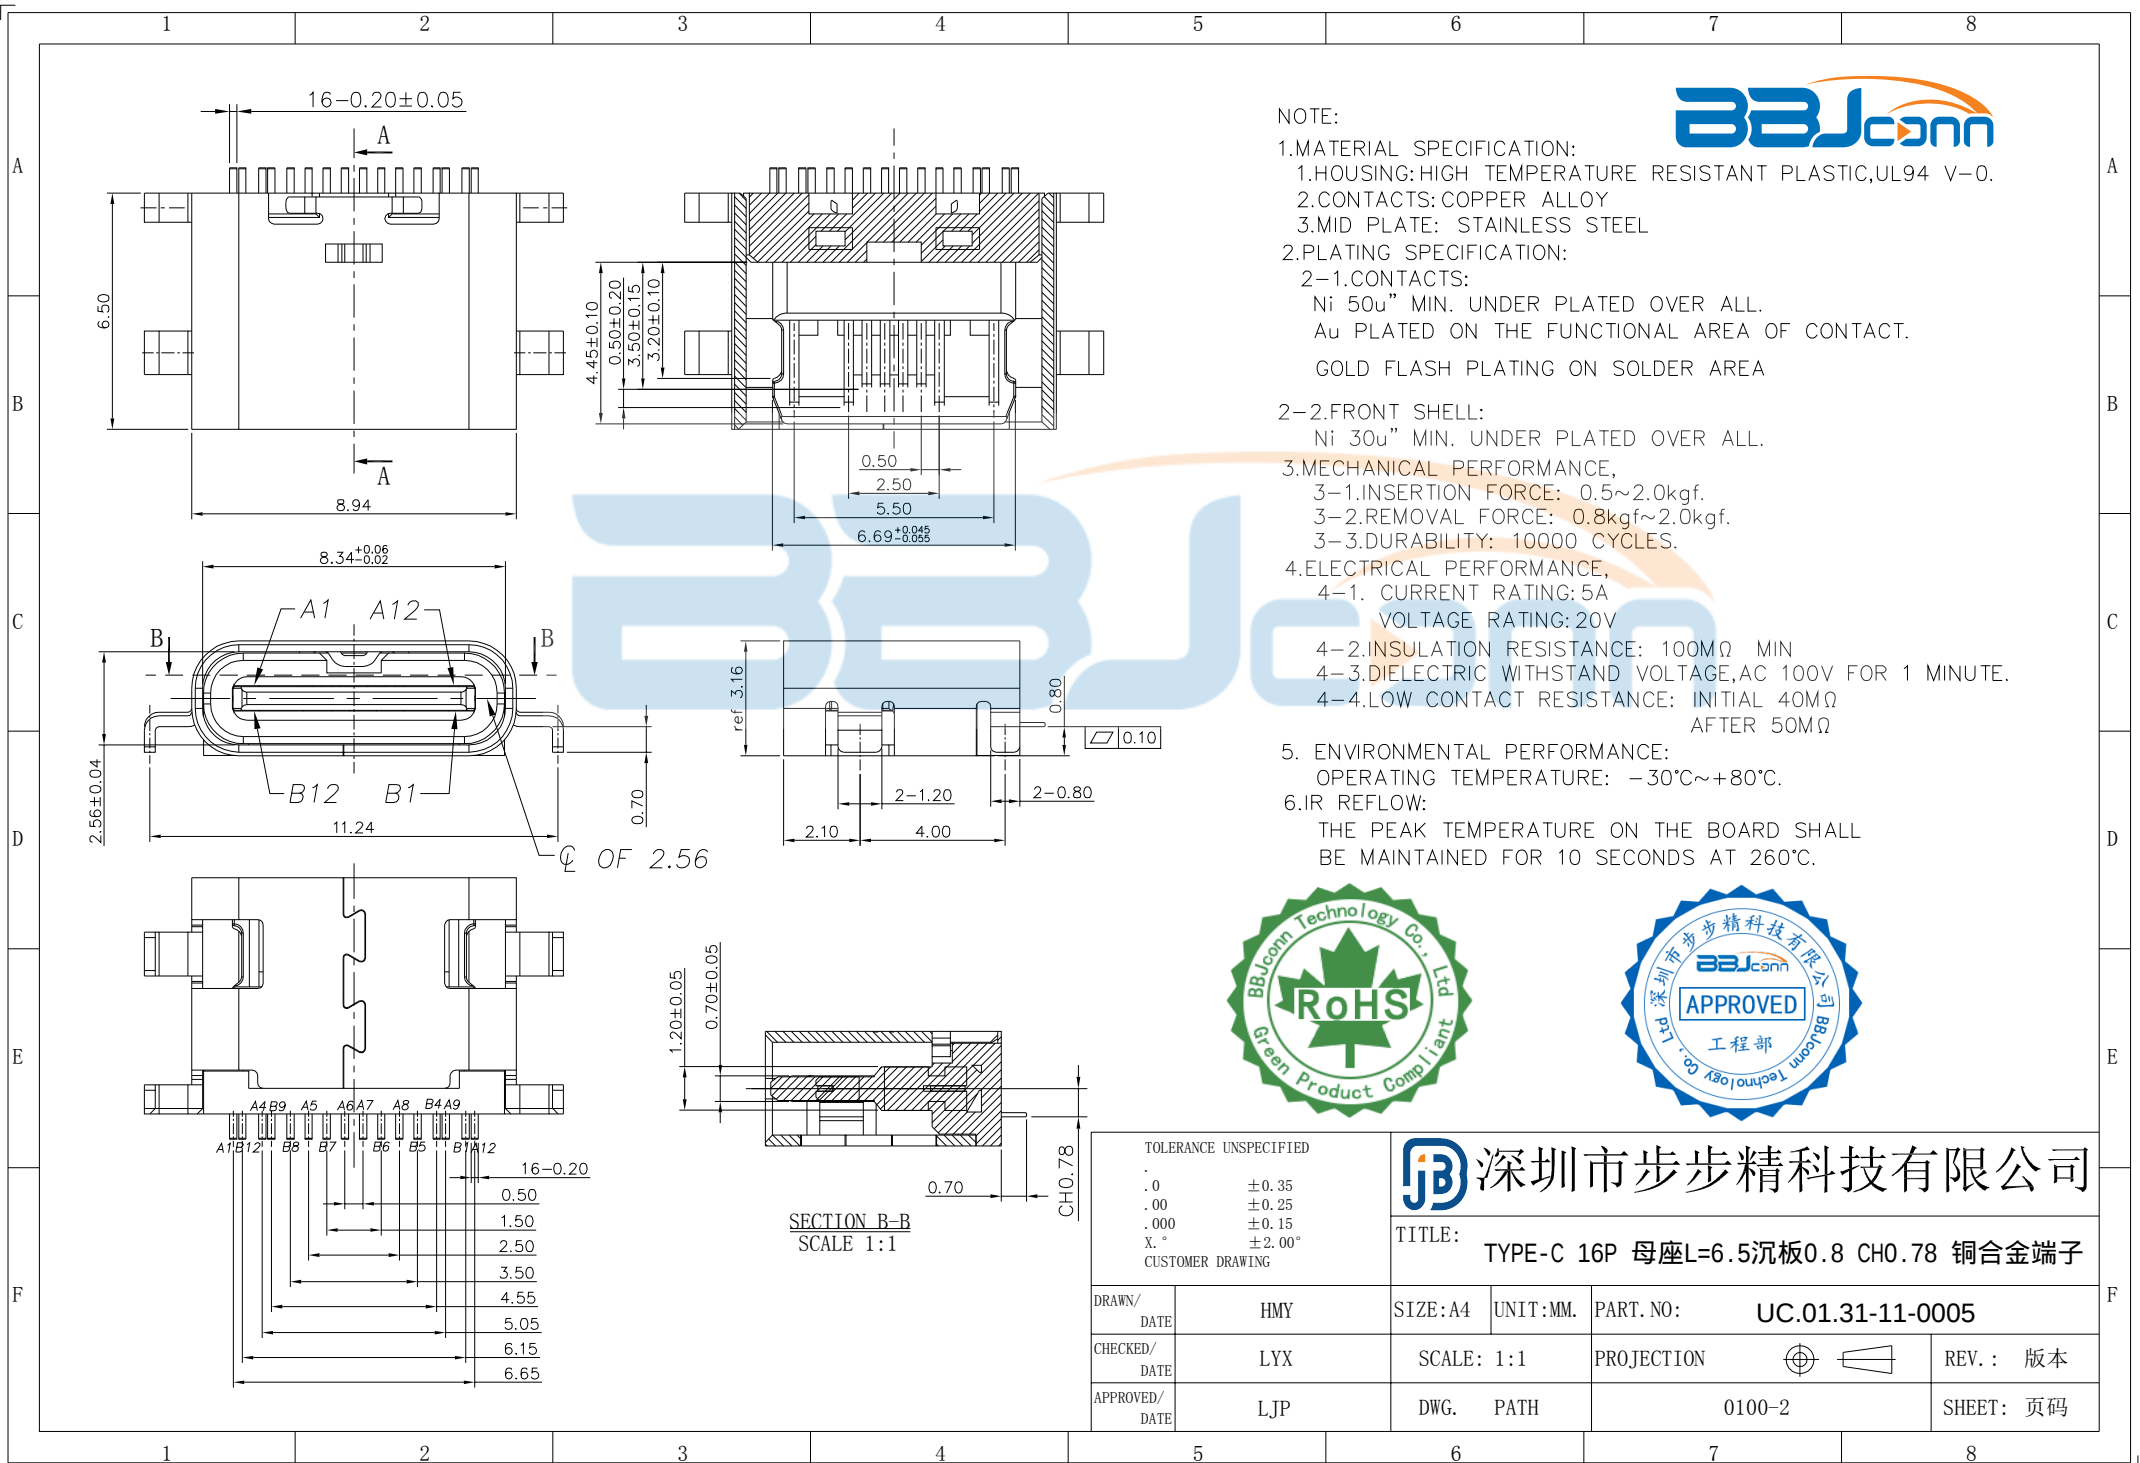

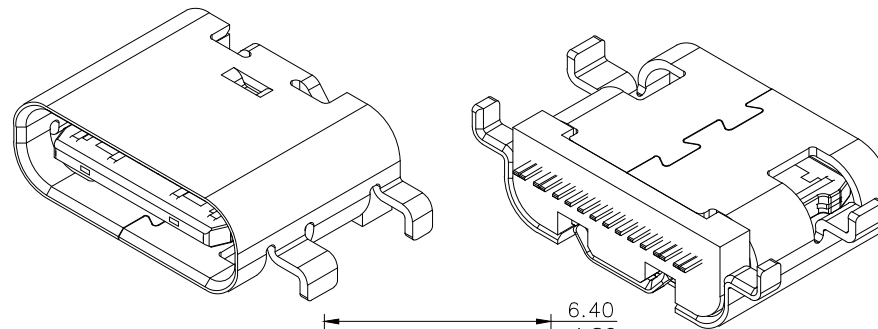

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

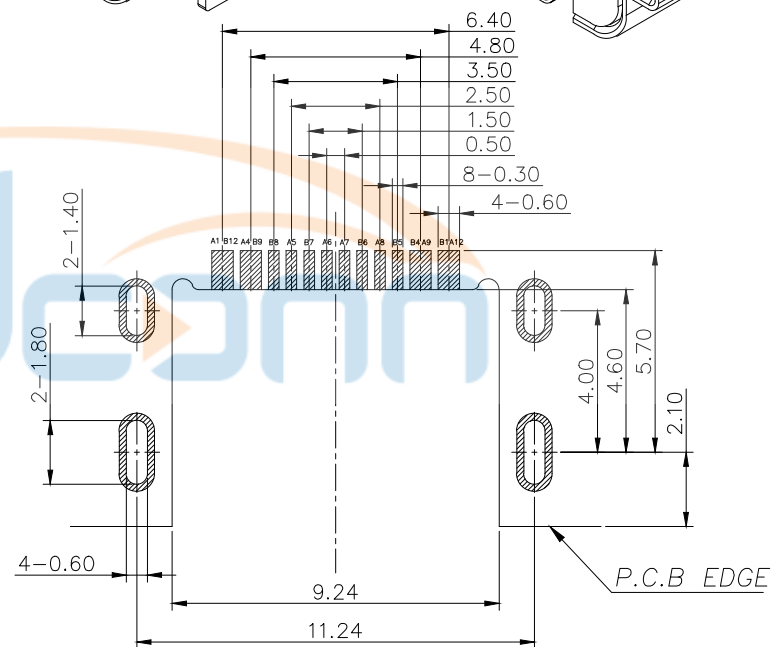

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05





TOLERANCE UNSPECIFIED

.0 ± 0.35
.00 ± 0.25
.000 ± 0.15
X.° $\pm 2.00^\circ$
CUSTOMER DRAWING

深圳市步步精科技有限公司

TITLE:
TYPE-C 16P 母座L=6.5沉板0.8 CH0.78 铜合金端子


DRAWN/ DATE	HMY	SIZE: A4	UNIT: MM.	PART. NO:	UC.01.31-11-0005	
CHECKED/ DATE	LYX	SCALE: 1:1	PROJECTION		REV.:	版本
APPROVED/ DATE	LJP	DWG. PATH	0100-2		SHEET:	页码

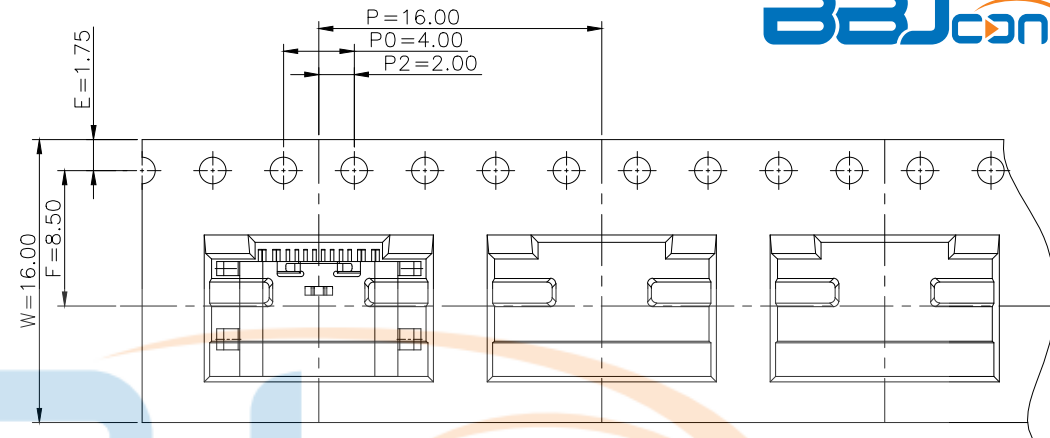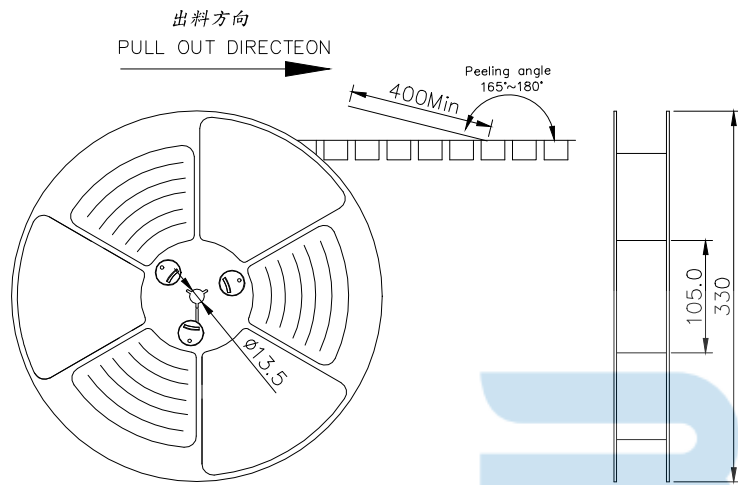

NOTES

1.帶子引導長度
LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON

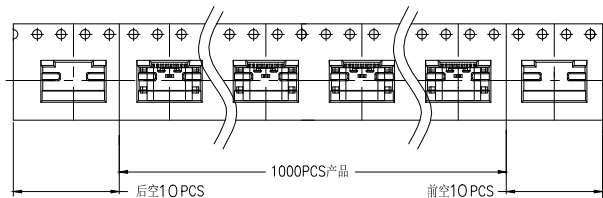

2.上帶 剝力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

TAPE & REEL 14 PCS



1 REEL
= 1000 PCS

LABEL

BOX

DIMENSIONS:
33.5X33.5X30.5

1 CARTON
=14 REELS
=14000 PCS



TOLERANCE UNSPECIFIED

.0 ±0.35
.00 ±0.25
.000 ±0.15
X.° ±2.00°
CUSTOMER DRAWING

深圳市步步精科技有限公司

TITLE:

TYPE-C 16P 母座L=6.5沉板0.8 CH0.78 铜合金端子

DRAWN/ DATE	HMY	SIZE:A4	UNIT:MM.	PART. NO:	UC.01.31-11-0005
CHECKED/ DATE	LYX	SCALE: 1:1	PROJECTION	REV.:	版本
APPROVED/ DATE	LJP	DWG. PATH	0100-2	SHEET:	页码

包裝明細表 (The detail of the packing) Carton						
產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
	1000	14	14000	----	----	----