

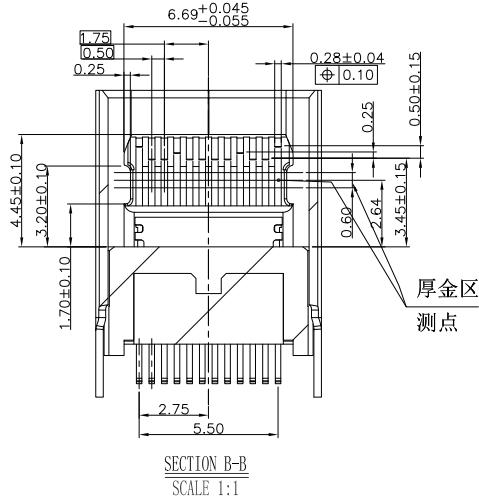
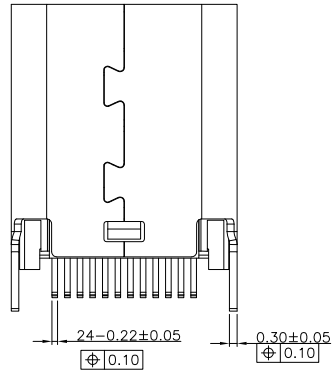
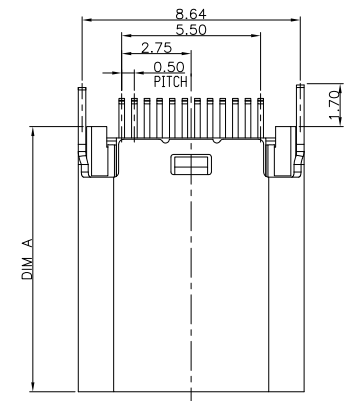

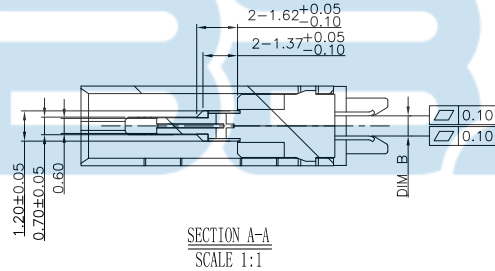




RECOMMENDED P.C.B. LAYOUT (T:1.00mm)  
TOLERANCE UNSPECIFIED ±0.05mm

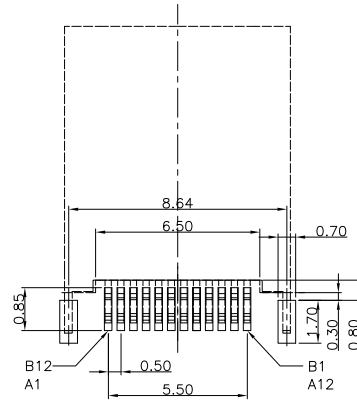

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

| PIN | Signal Name | Description                                               | PIN | Signal Name | Description                                               |
|-----|-------------|-----------------------------------------------------------|-----|-------------|-----------------------------------------------------------|
| A1  | GND         | Ground return                                             | B12 | GND         | Ground return                                             |
| A2  | SSTxp1      | Positive half of first SuperSpeed TX differential pair    | B11 | SSRXp1      | Positive half of first SuperSpeed RX differential pair    |
| A3  | SSTxm1      | Negative half of first SuperSpeed TX differential pair    | B10 | SSRXm1      | Negative half of first SuperSpeed RX differential pair    |
| A4  | Vns         | Bus Power                                                 | B9  | Vns         | Bus Power                                                 |
| A5  | CC1         | Configuration Channel                                     | B8  | SBR2        | Sideband Use (SBR)                                        |
| A6  | Dp1         | Positive half of the USB 2.0 differential pair-Position 1 | B7  | Dm2         | Negative half of the USB 2.0 differential pair-Position 2 |
| A7  | Dn1         | Negative half of the USB 2.0 differential pair-Position 1 | B6  | Dp2         | Positive half of the USB 2.0 differential pair-Position 2 |
| A8  | SBR1        | Sideband Use (SBR)                                        | B5  | CC2         | Configuration Channel                                     |
| A9  | Vns         | Bus Power                                                 | B4  | Vns         | Bus Power                                                 |
| A10 | SSRXm2      | Negative half of second SuperSpeed RX differential pair   | B3  | SSTxm2      | Negative half of second SuperSpeed TX differential pair   |
| A11 | SSRXp2      | Positive half of second SuperSpeed RX differential pair   | B2  | SSTxp2      | Positive half of second SuperSpeed TX differential pair   |
| A12 | GND         | Ground return                                             | B1  | GND         | Ground return                                             |



| NO | DIM A | DIM B | NO | DIM A | DIM B |
|----|-------|-------|----|-------|-------|
| 1  | 10.5  | 0.8   | 7  | 8.8   | 1.0   |
| 2  | 9.3   | 0.8   | 8  | 10.0  | 1.0   |
| 3  | 8.8   | 0.8   | 9  | 10.5  | 1.2   |
| 4  | 10.0  | 0.8   | 10 | 9.3   | 1.2   |
| 5  | 10.5  | 1.0   | 11 | 8.8   | 1.2   |
| 6  | 9.3   | 1.0   | 12 | 10.0  | 1.2   |


|                       |        |                                    |            |                           |  |
|-----------------------|--------|------------------------------------|------------|---------------------------|--|
| TOLERANCE UNSPECIFIED |        | 深圳市步步精科技有限公司                       |            |                           |  |
| 0. ±0.38              |        | TITLE: TYPE-C 24PIN 母座 夹板1.0 H=9.3 |            |                           |  |
| 0.0 ±0.25             |        |                                    |            |                           |  |
| 0.00 ±0.15            |        |                                    |            |                           |  |
| 0.0° ±2°              |        |                                    |            |                           |  |
| DRAWN/ DATE           | 设计 TSP | SIZE:A4                            | UNIT:MM.   | PART.NO: UC.01.72-4W-0004 |  |
| CHECKED/ DATE         | 审核 LYX | SCALE: 1:1                         | PROJECTION | REV.: 版本                  |  |
| APPROVED/ DATE        | 核准 LJP | DWG. PATH                          | 0228-1     | SHEET: 页码                 |  |



| REV. | DESCRIPTION | NAME | DATE |
|------|-------------|------|------|
| A    | NEWS ISSUE  |      |      |
|      |             |      |      |

將成品依同一方向放入真空盤內,如圖所示。

At same direction, put product onto the tray. Direction refers to below drawing.

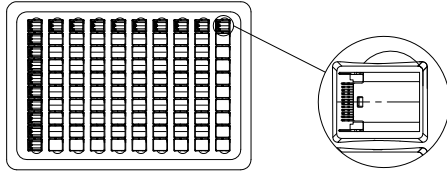

VIEW-1

1) 一只紙箱可放置之包裝盤(包括上蓋)見下表。


1) trays per carton, please see next table.

2). 每1個紙箱用的包裝數量詳見下表。

2) The Q'ty of products per carton please see next tabel.

3) 將裝滿成品的真空盤用 PE帶捆緊後放在塑膠袋內,裝完後再封箱。

3) Bind the trays with PE tape and then, put them into the poly bag. Seal the carton with tape.

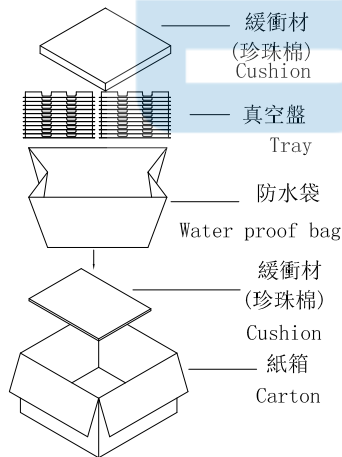

VIEW-2

三.

1). 將標籤貼於紙箱側麥上方。

Stick the needful label On the up-right corner of the side of carton.

標籤黏貼處  
Location of  
Sticking lable



VIEW-3



備 註(REMARK)

1. 若有未裝滿之零數箱,必須以緩衝材塞滿。  
The unfilling-carton must be filled with assuagement.

2. 防水袋需用膠帶貼實且封口。  
waterproof plastic bag must be folded up.

3. 裝滿成品后之外箱,最大堆積箱數:5箱  
About the box fully filled with products, the MAX accumulating quantity of boxes is 5.

4. 如須貼Bar-code,請依Bar-code作業辦法執行  
If barcode lable is required, do it according to the related barcode lable operation standards.



| 包裝明細表 (The detail of the packing) |             |         |                |          |          |  |
|-----------------------------------|-------------|---------|----------------|----------|----------|--|
| 包裝容量 (Packing Capacity)           |             |         | 重量 Weight (Kg) |          |          |  |
| pcs/box                           | boxs/Carton | Pcs/Box | N.W./Pcs       | N.W./Box | G.W./Box |  |
| 100                               | 80          | 8000    |                |          |          |  |

|                       |  |                                    |            |          |                            |          |           |
|-----------------------|--|------------------------------------|------------|----------|----------------------------|----------|-----------|
| TOLERANCE UNSPECIFIED |  | 深圳市步步精科技有限公司                       |            |          |                            |          |           |
| 0. ±0.38              |  | TITLE: TYPE-C 24PIN 母座 夾板1.0 H=9.3 |            |          |                            |          |           |
| 0.0 ±0.25             |  | DRAWN/ 设计 TSP                      | SIZE:A4    | UNIT:MM. | PART. NO: UC.01.72-4W-0004 |          |           |
| 0.00 ±0.15            |  | CHECKED/ 审核 LYX                    | SCALE: 1:1 |          | PROJECTION                 | REV.: 版本 |           |
| 0.0° ±2°              |  | APPROVED/ 核准 LJP                   | DWG. PATH  |          | 0228-1                     |          | SHEET: 页码 |