

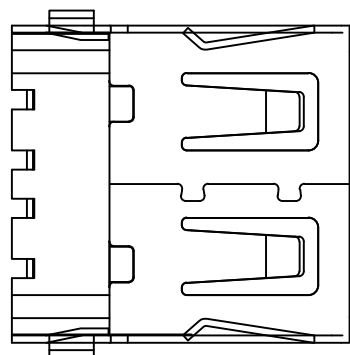
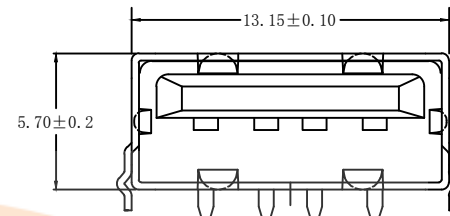


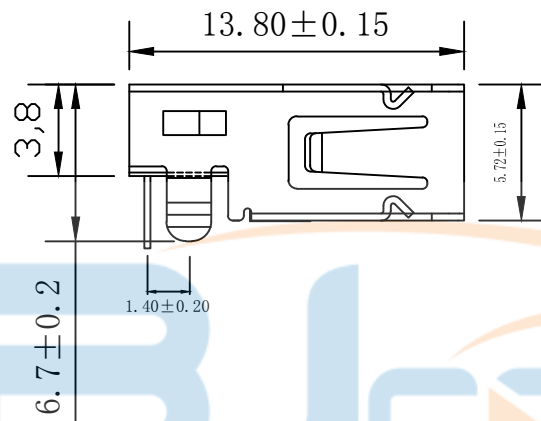

RECOMMENDED P.C.B LAYOUT

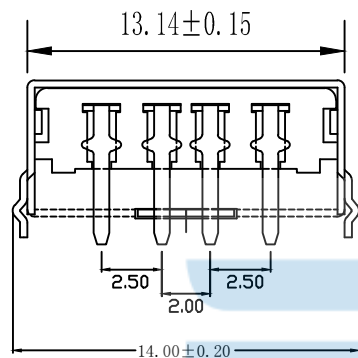

NOTE:


1. MATERIAL:

- a. HOUSING: PBT GLASS FIBRE
- b. CONTACT: PHOSPHOR BRONZE T=0.25mm
(SURFACE PLATING: Au1u" + Sn100u" + Ni60u")
- c. SHEEL: BRASS T=0.30mm
(SURFACE PLATING: Ni100u" ~ 120u")

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -55??- 105??

未注公差		材质 MATERIAL	单位 UNIT	第三角投影	比例 SCALE	0383-1		TITLE:	
X	±0.1	硬度 HRC	mm		1 : 1 (A4)	DRAWING 绘图	REV 版次	USB AF90度沉板1.9 PBT黑色胶芯 平口 铜壳L=13.8	
X.X	±0.05		APPROVAL BY					PART NO:	
X.XX	±0.005		核准					UB.01.32-12-V001	
X.XXX	±0.002		LJP					深圳市步步精科技有限公司	

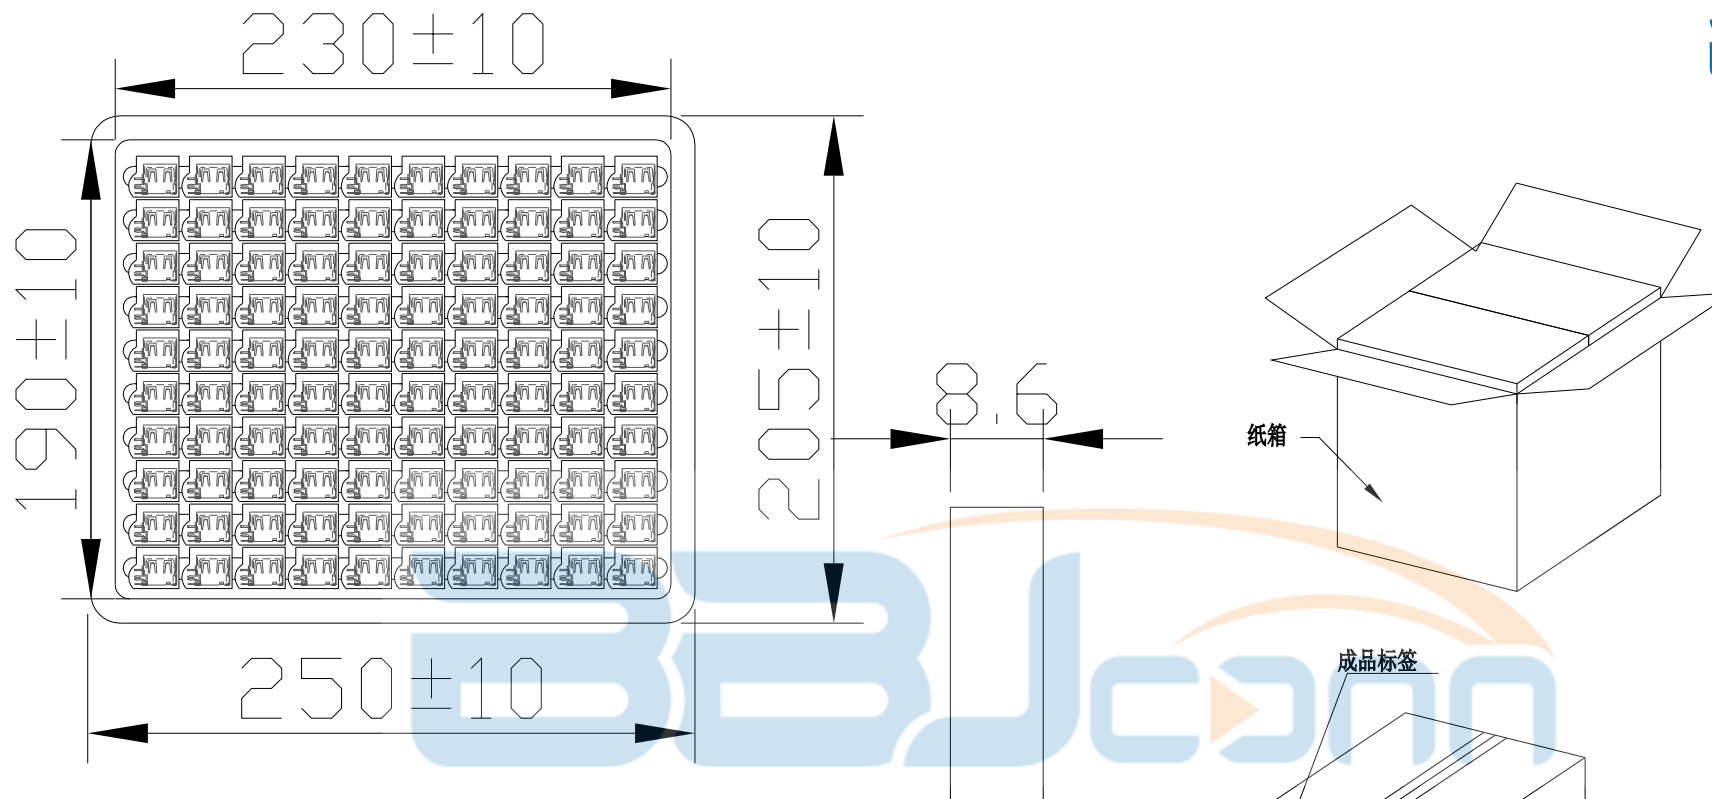

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签

纸箱规格: 350*210*290



深圳市步步精科技有限公司

公差对照表		视角 	批准	LJP	TITLE: USB AF90度沉板1.9 PBT黑色胶芯 平口 铜壳L=13.8
尺寸范围	公差范围				
0~10	±0.1	单位 MM	审核	LYX	PART NO: UB.01.32-12-V001
10~20	±0.2				
20~40	±0.3				
40~60	±0.5				
60~80	±0.5				
80~100	±1	比例 MM	设计	ZWG	0383-1
120~140	±1.5				