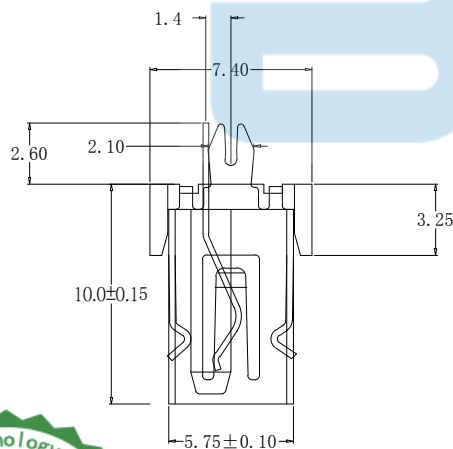
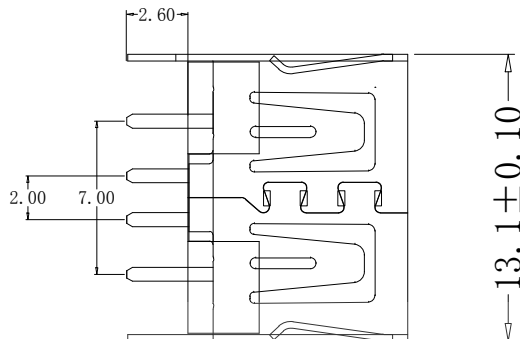



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Level
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
- 端子保持力: Terminal Retenion
1.0kgf (MIN)

原材料:Material:

- 塑胶:Housing: PBT
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子四周镀50U" (MIN) 锡, 镀金区域镀100-200U"镀金1U"

Nickel Plating




TOLERANCE UNSPECIFIED

.X±0.15 X.±5°
.XX±0.1 .X±2°
.XXX±0.02 .XX±1°

深圳市步步精科技有限公司

TITLE:
USB 2.0 AF 180度 H=10.0 平口 直插 PBT黑胶 铁壳

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART.NO: UB.01.12-11-V005	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1		SHEET: 页码

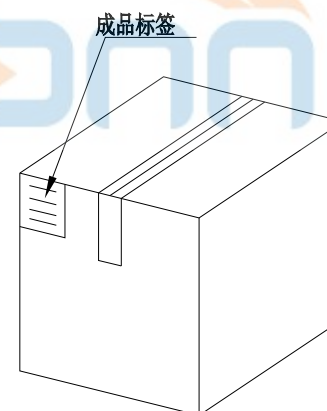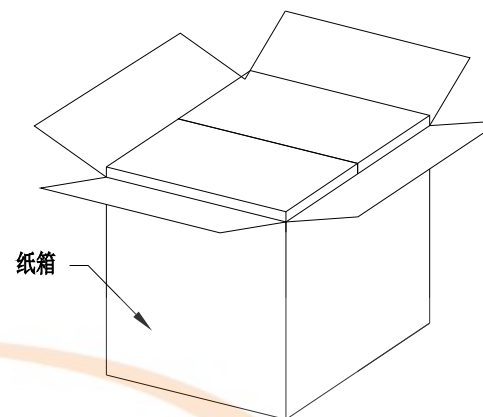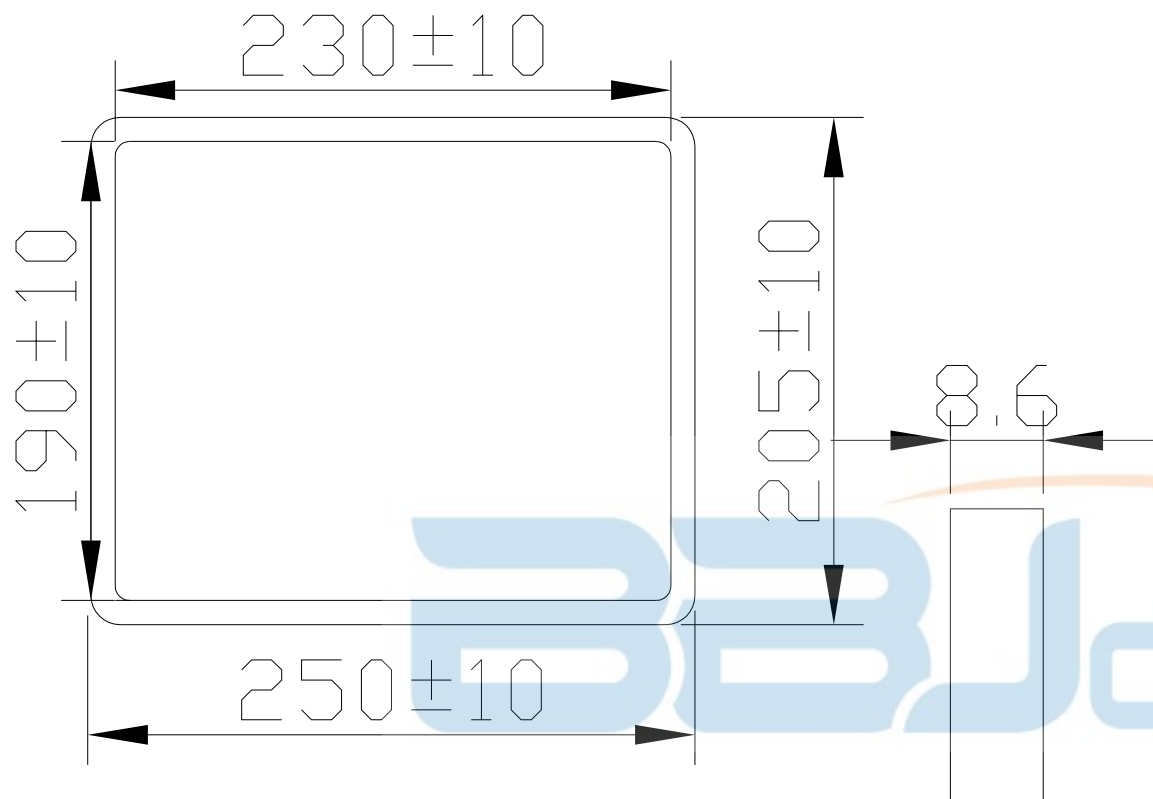

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



TOLERANCE UNSPECIFIED			深圳市步步精科技有限公司		
.0	±0.35				
.00	±0.25		TITLE:		
.000	±0.15		USB 2.0 AF 180度 H=10.0 平口 直插 PBT黑胶 铁壳		
X.°	±2.00°				
CUSTOMER DRAWING					
DRAWN/ DATE	设计	HMY	SIZE:A4	UNIT:MM.	PART.NO: UB.01.12-11-V005
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0242-2	SHEET: 页码