


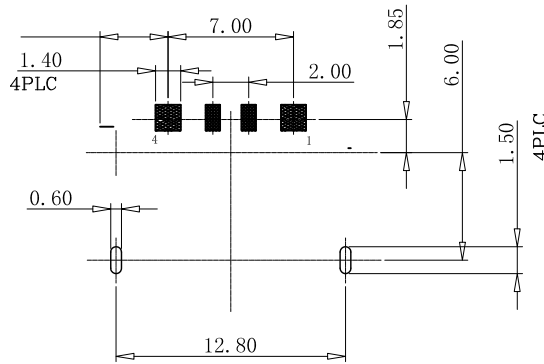
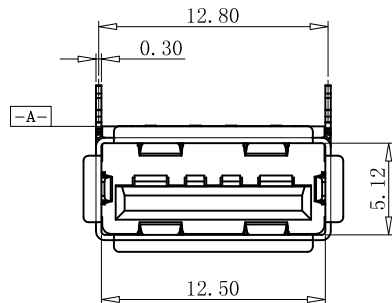
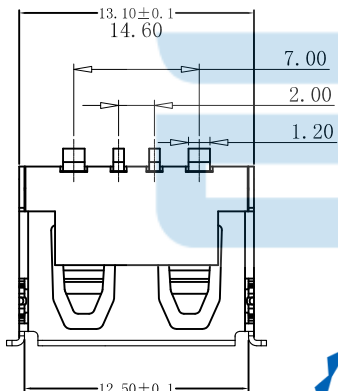




RECOMMENDED PCB LAYOUT
THICKNESS=1.0mm (TOLERANCES ± 0.05)



SECTION A-A



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
U1 PA9T White/Black/yellow
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

TOLERANCE UNSPECIFIED

.0	± 0.35
.00	± 0.25
.000	± 0.15
X.°	$\pm 2.00^\circ$
CUSTOMER DRAWING	



深圳市步步精科技有限公司

TITLE: USB 2.0 AF 90度 短体L=10.0 H=6.3 前俩脚插 鱼叉脚
端子SMT 浅橙色PA9T (114C) 大电流 端子脚长1.0mm 端子镀金3u 平口 铜壳

DRAWN/ DATE	设计 TSP	SIZE: A4	UNIT: MM.	PART. NO: UB.01.12-A2-V001	REV.: 版本
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION		SHEET: 页码
APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1		

