



规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levot
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:






1. 插拔力: Cnnecter Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Thermaplastics,
LCP PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

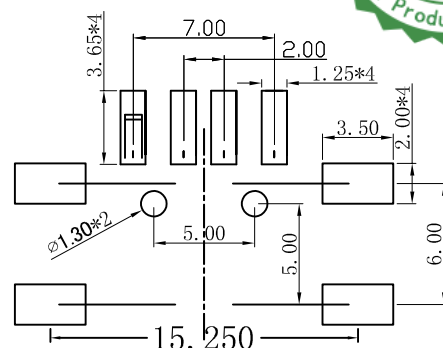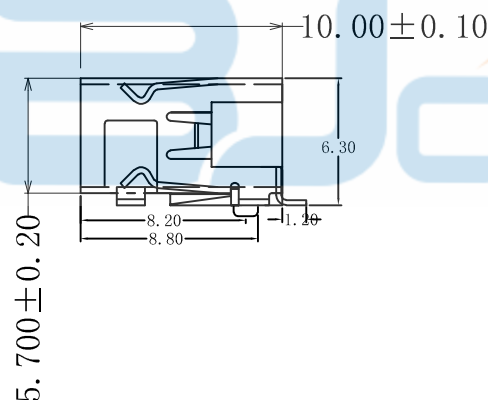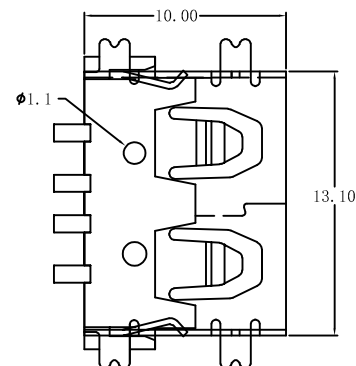

RECOMMENDED P.C.B LAYOUT







TOLERANCE UNSPECIFIED
未指定公差
.0 ±0.35
.00 ±0.25
.000 ±0.15
X. ° ±2.00°
CUSTOMER DRAWING

深圳市步步精科技有限公司

TITLE:
名称: USB 2.0 AF 90度 全贴平口带柱 短体L=10.0 PBT 黑胶 铁壳

DRAWN/ 设计	YDH	SIZE:A4	UNIT:MM.	PART. NO: 料号: UB.01.22-11-V002	
CHECKED/ 审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ 核准	LJP	DWG. PATH	0383-1	SHEET: 页码	

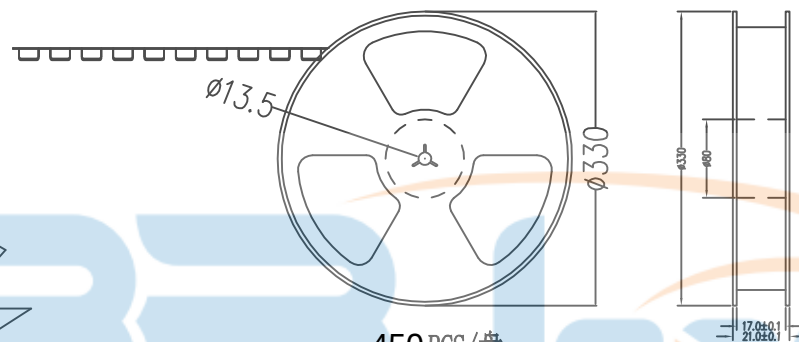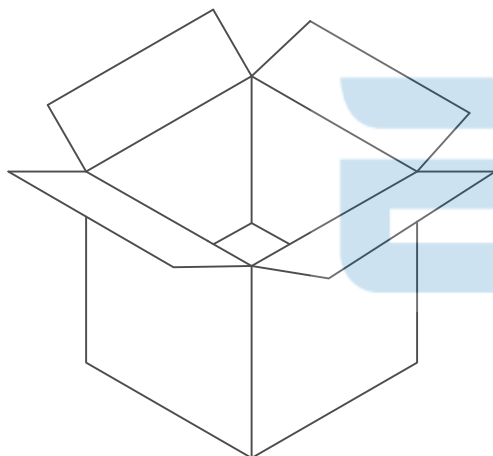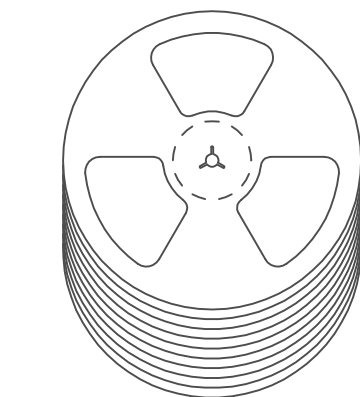

450PCS/盘

备注:

1. 包装数量: 450pcs/盘, 10盘/箱或15盘/箱
2. 包装带长度: 每盘前后各空10-20个空格, 中间包装.
3. 材质:
载体: 聚丙烯(PS), 抗阻 $10^{6-9} \Omega$
上带: 聚乙烯(PET), 抗阻 $10^{6-11} \Omega$
卷盘: 聚苯乙烯.

纸箱规格: 345*345*23mm

纸箱规格: 345*345*35mm



深圳市步步精科技有限公司

0383-1

一般公差	
XX. $\pm$	XXX. $\pm$
.X $\pm$ 0.25	.XXX $\pm$
.XX $\pm$ 0.10	X. $\pm$ 2°
.XXX $\pm$ 0.05	.X° $\pm$ 0.5°

比例 SCALE	N/A
单位 UNIT	MM
尺寸 SIZE	A4

绘图 DRAWN	YDH
审核 CHECKED	YJF
核准 APPROVE	LJP

日期 DATE	
日期 DATE	
日期 DATE	

TITLE: USB 2.0 AF 90度 全贴平口带柱 短体L=10.0 PBT 黑胶 铁壳	版次 REV. 1.0
PART NO: UB.01.22-11-V002	页次 PAGE 1/1