



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ & \blacktriangledown should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.

Specification:

1. Current Rating: 1.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 mΩ Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

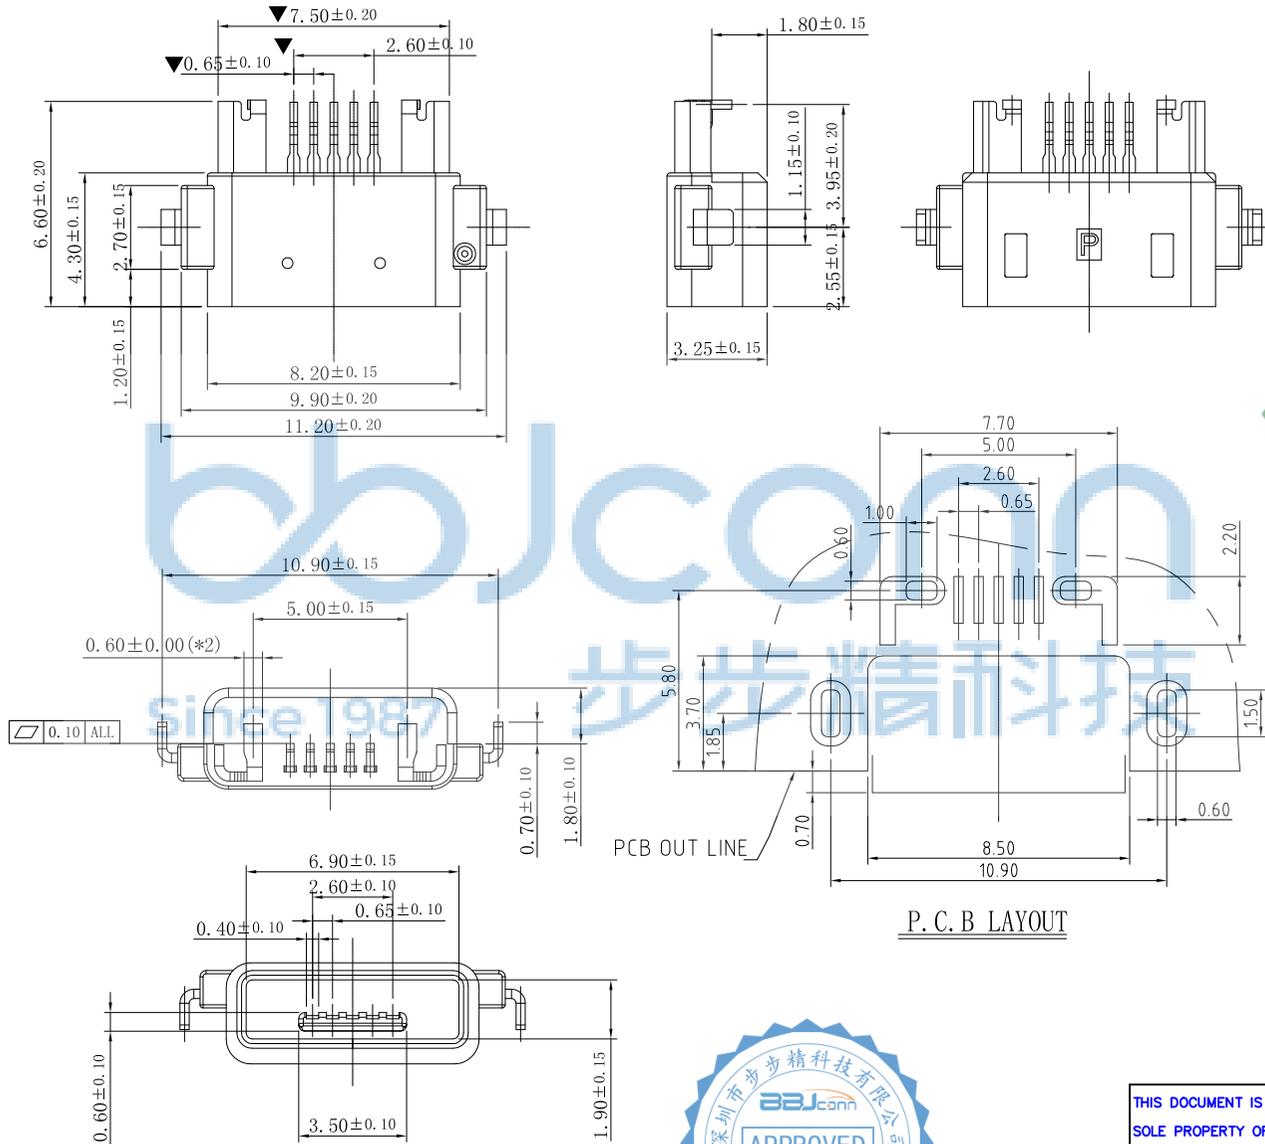


P. C. B LAYOUT

3	Shell	1	C2680R-H Au/Ni Plating T=0.30mm
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm
1	Housing	1	PA9T&LCP (G. F30%)
ITEM	PART NAME	Q'TY	FINISH








THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程 部 APPROVED	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	23/05'02	NAME: MICRO 5P 防水母座 AB型 反向 L=6.60 沉板1.80 两脚插 PA9T黑胶 平口 雾锡 铜壳
CHKD.	LYX	23/05'02	PJ. NO.: MC.01.72-11-J002
DR.	SGF	23/05'02	SIZE: A4 DRW NO.:
PDWG.No: 0523-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

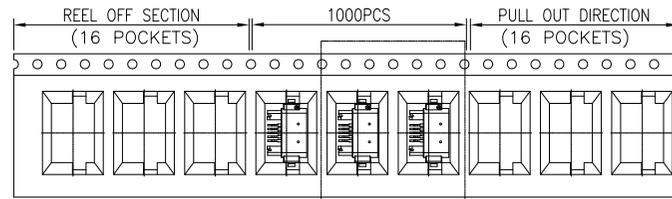

SEE DETAIL X

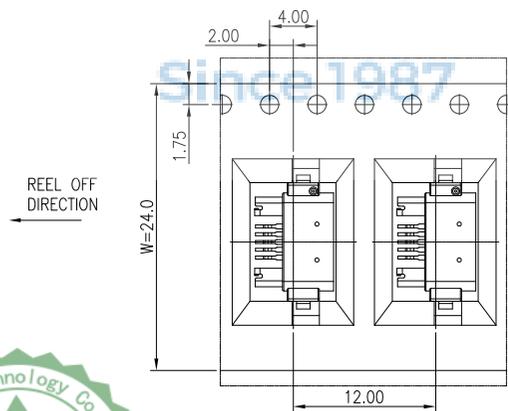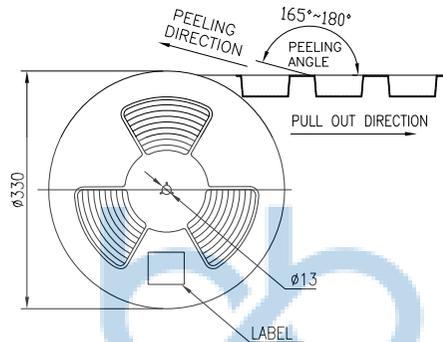

	REEL	CARTON
CONNECTOR (PCS)	1500	15000



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程管理部	
APPD.	JM_Zheng	23/05'02	NAME: MICRO 5P 防水母座 AB型 反向 L=6.60 沉板1.80 两脚插 PA9T黑胶 平口 雾锡 铜壳
CHKD.	LYX	23/05'02	PJ. NO.: MC.01.72-11-J002
DR.	SGF	23/05'02	SIZE: A4 DRW NO.:
PDWG.NO: 0523-1			FINISH: SEE NOTES MAT'L.: SEE NOTES
			SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1