







Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f, UL94v-0 LCP
- 1.2 Contact: copper alloy, $t=0.20\text{mm}$
- 1.3 Shell: C2680/SUS304, $t=0.25\text{mm}$

2. Specification:

- 2.1 Current rating: 1, 5PIN 1.8A Max/2, 3, 4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 m Ω Max.
- 2.4 Insulation resistance: 100 M Ω Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30° C~80° C

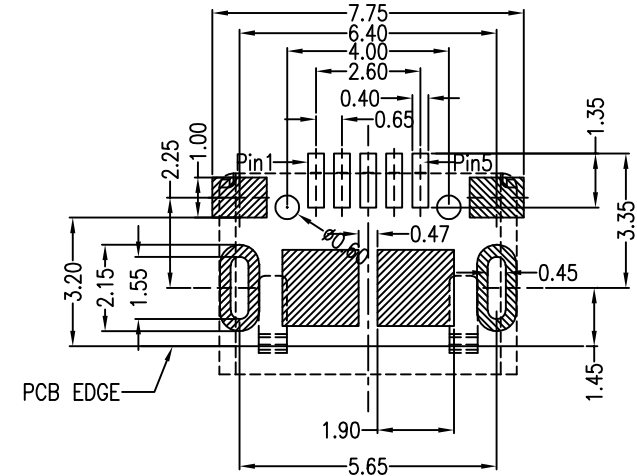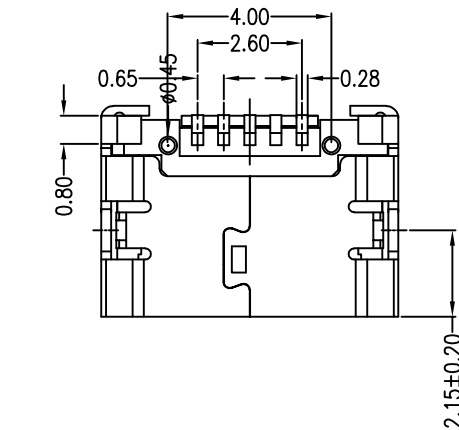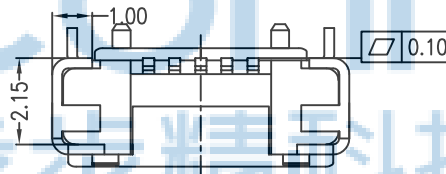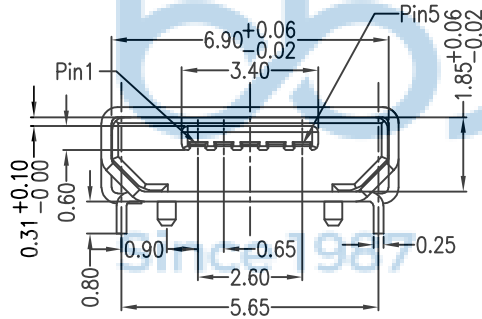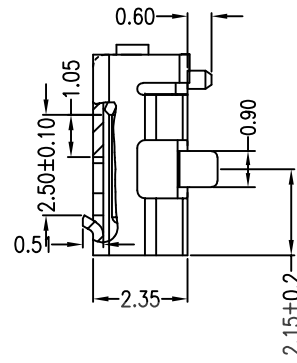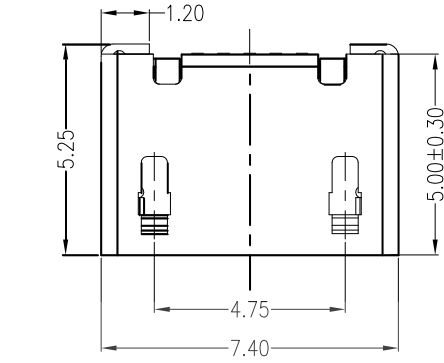

RECOMMENDED PCB LAYOUT
PCB图仅供参考

Contact Number	Signal Name	Typical wiring Assignment
1	VBUS	Red
2	D-	White
3	D+	Green
4	ID	<Ra_PLUG_ID
5	GND	Black
Shell	Shield	Drain wire

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0113-1




深圳市步步精科技有限公司

.X: ± 0.38 X': ± 3
.XX: ± 0.25 .X': ± 2
.XXX: ± 0.13 .XX': ± 1

NAME:
MICRO-5P 母座 内插有柱 L=5.0 固定脚距5.65 平口 铜壳 雾锡 冷封编带

APPD. JM_Zheng 23/05'02
CHKD. LYX 23/05'02
DR. SGF 23/05'02

PJ. NO.: MC. 01. 12-11-1001
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

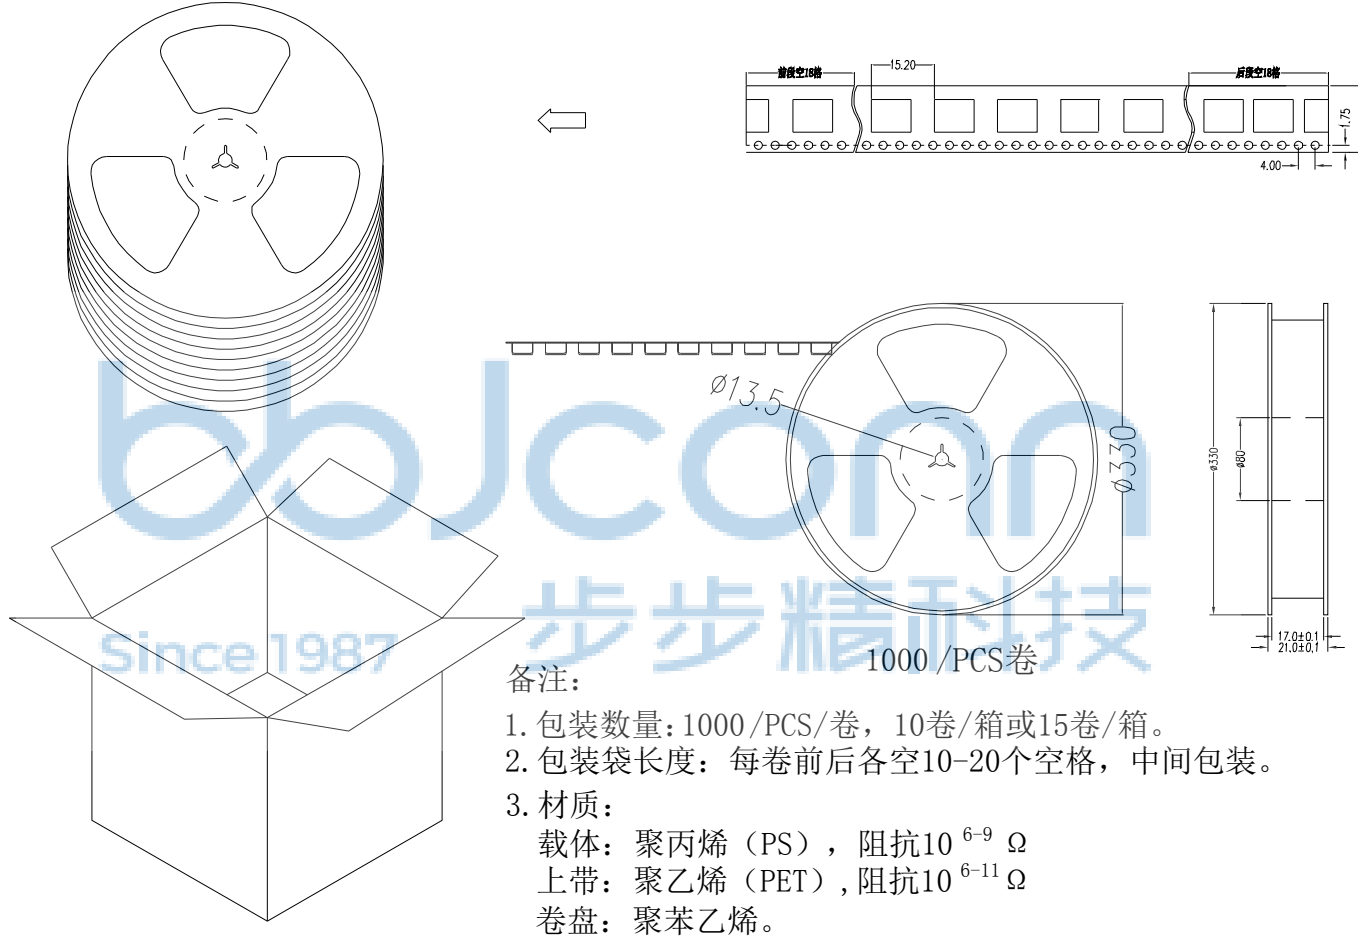

备注:

1. 包装数量: 1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$		NAME: MICRO-5P 母座 内插有柱 L=5.0 固定脚距5.65 平口 铜壳 雾锡 冷封编带			
APPD.		JM_Zheng 23/05'02		PJ. NO.: MC. 01. 12-11-1001			
CHKD.		LYX 23/05'02		SIZE: A4 DRW NO.:			
PDWG.NO: 0113-1		DR. SGF 23/05'02		FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1			