
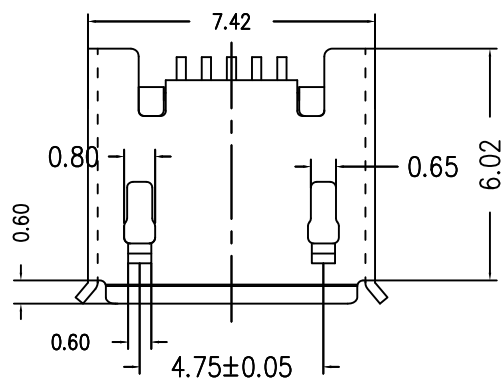
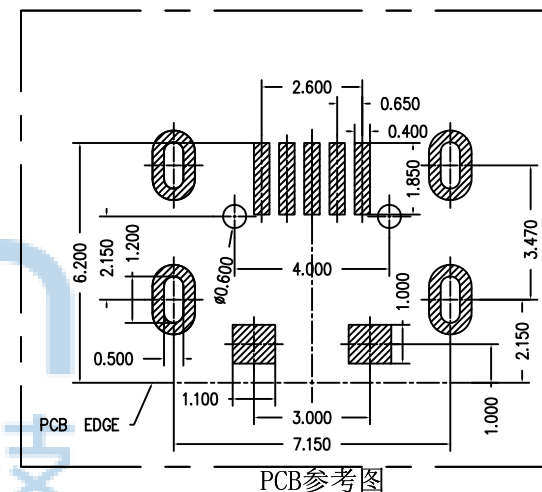
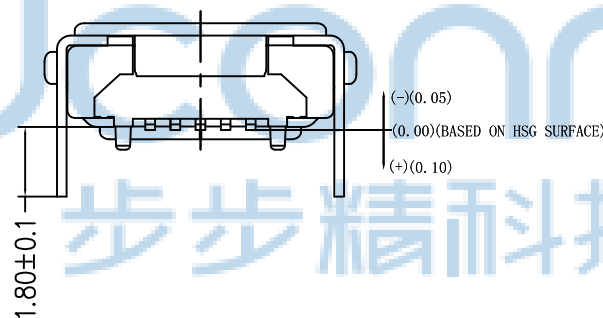
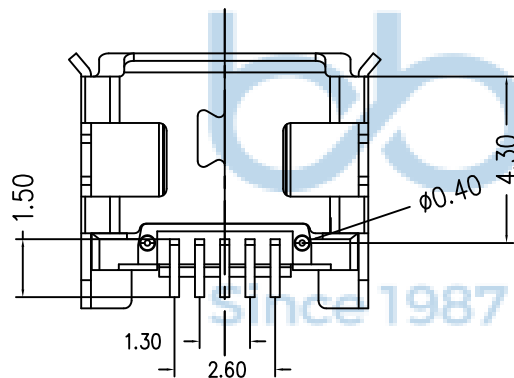


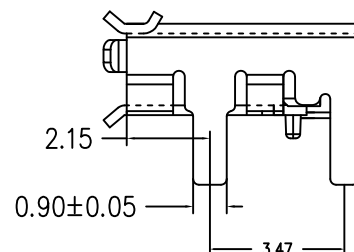


项次	名 称	材 质	电镀或颜色	数量	备注
1	MICRO 母座端子	黄铜(C2680 EH)	镀金	5	
2	MICRO 母座胶芯	LCP 耐高温	BLACK	1	
3	MICRO 母座外壳	黄铜(C2680 EH)	镀(零锡/镍)	1	

 深圳市步步精科技有限公司

.X: ±0.38		X: ±3'		NAME: MICRO-5P 母座 四脚插有柱L=6.02 脚距7.2 脚长1.8 LCP黑胶 卷边 铜壳		
.XX: ±0.25		X: ±2'				
.XXX: ±0.13		XX: ±1'				
APPD.	JM_Zheng	23/05'02			PJ. NO.:	MC.01.51-21-1004
CHKD.	LYX	23/05'02			SIZE: A4	DRW NO.:
		FINISH: SEE NOTES			MAT'L.: SEE NOTES	
DR.	SGF	23/05'02	SCALE: N/A REV: A3 UNIT: mm PAGE: 1/1			

- 1:切勿直接量度图纸取数.
- 2:如有任何疑点请即查询.
- 3:除非另行注明,否则所有尺寸以mm计.
- 4:未注尺寸公差如左所示

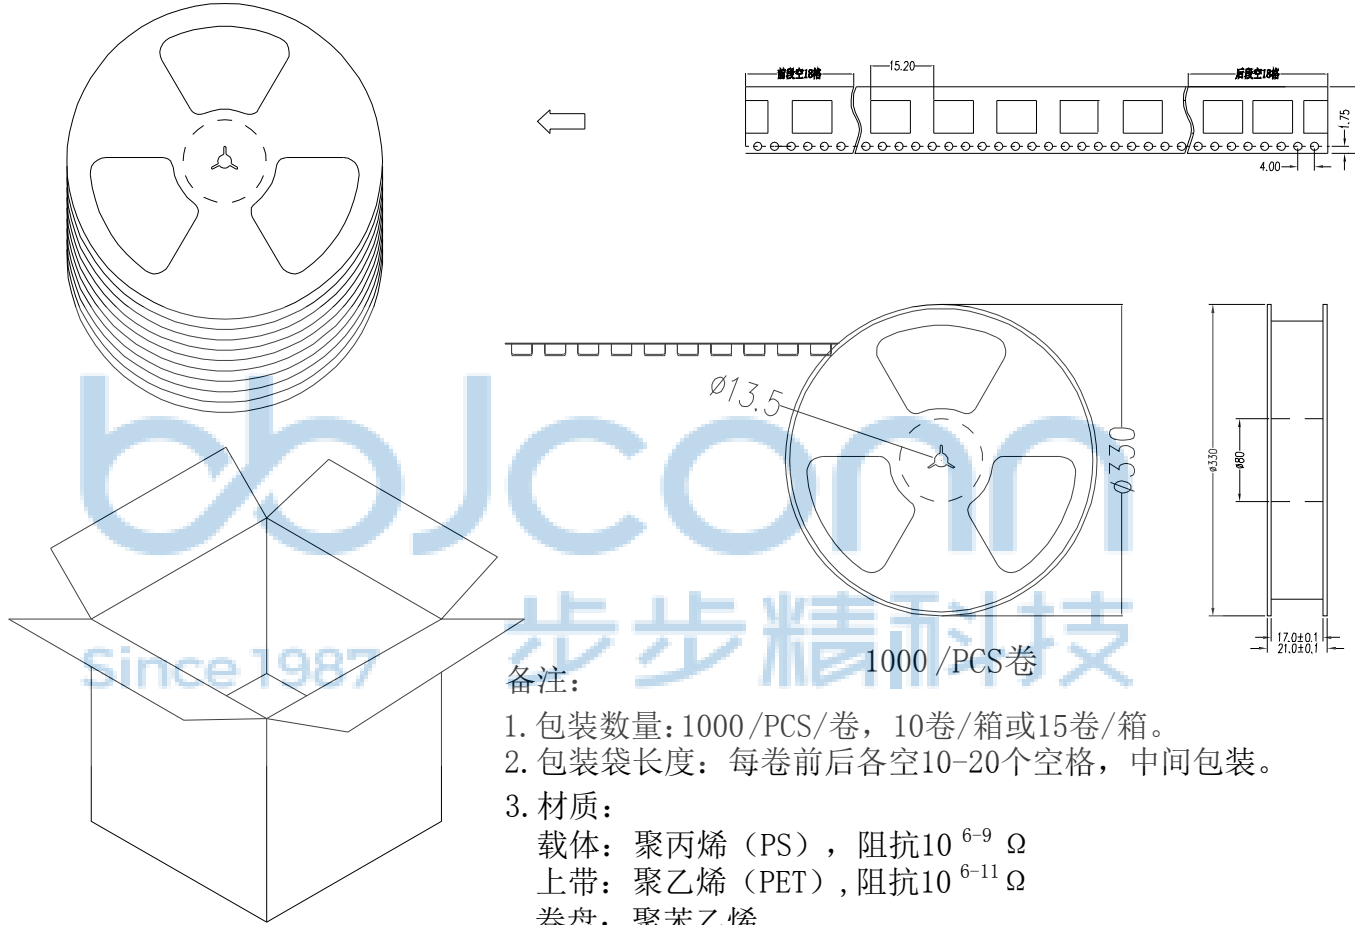

备注:

1. 包装数量: 1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$		NAME: MICRO-5P 母座 四脚插有柱L=6.02 脚距7.2 脚长1.8 LCP黑胶 卷边 铜壳			
APPD.	JM_Zheng	23/05'02			PJ. NO.: MC.01.51-21-1004		
CHKD.	LYX	23/05'02			SIZE: A4 DRW NO.:		
PDWG.NO: 0113-1		DR.	SGF	23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES		
					SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1		