







Note:

1. Material:


- 1.1 Housing: High temperature thermoplastic with g.f, LCP Black UL94v-0
- 1.2 Contact: copper alloy C5191, t=0.15mm Gold Plated 1U
- 1.3 Shell: C2680/SUS304, t=0.30mm Nickel plating 50U

2. Specification:

- 2.1 Current rating: 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 0.8 Kgf Min.
- 2.7 Temperature range: -30° C~80° C

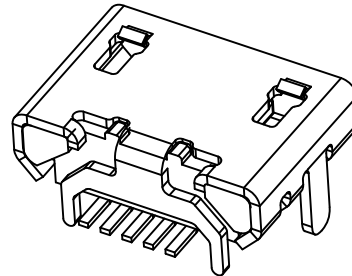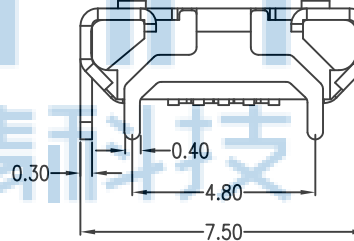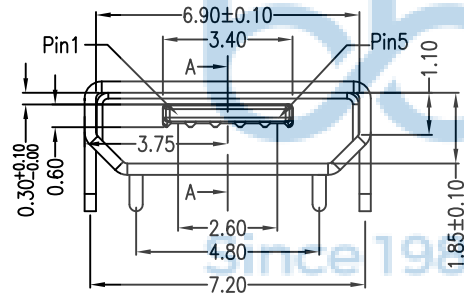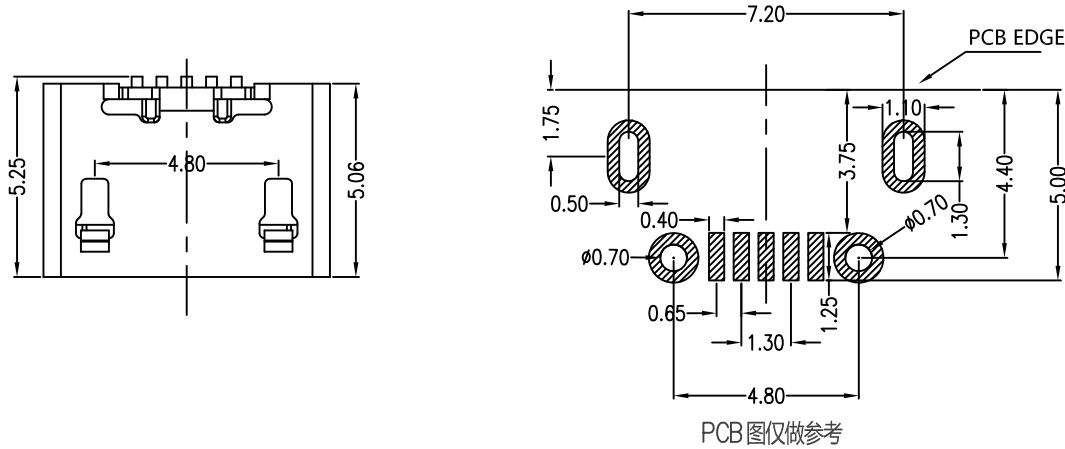

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: MICRO-5P 小牛角4.8 L=5.06 平口 铜壳 亮锡	
APPD.	JM_Zheng	23/05'02	 PJ. NO.: MC.01.62-21-1001		SIZE: A4
CHKD.	LYX	23/05'02	FINISH: SEE NOTES		MAT'L.: SEE NOTES
PDWG.NO:	0113-1	DR.	SGF	23/05'02	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

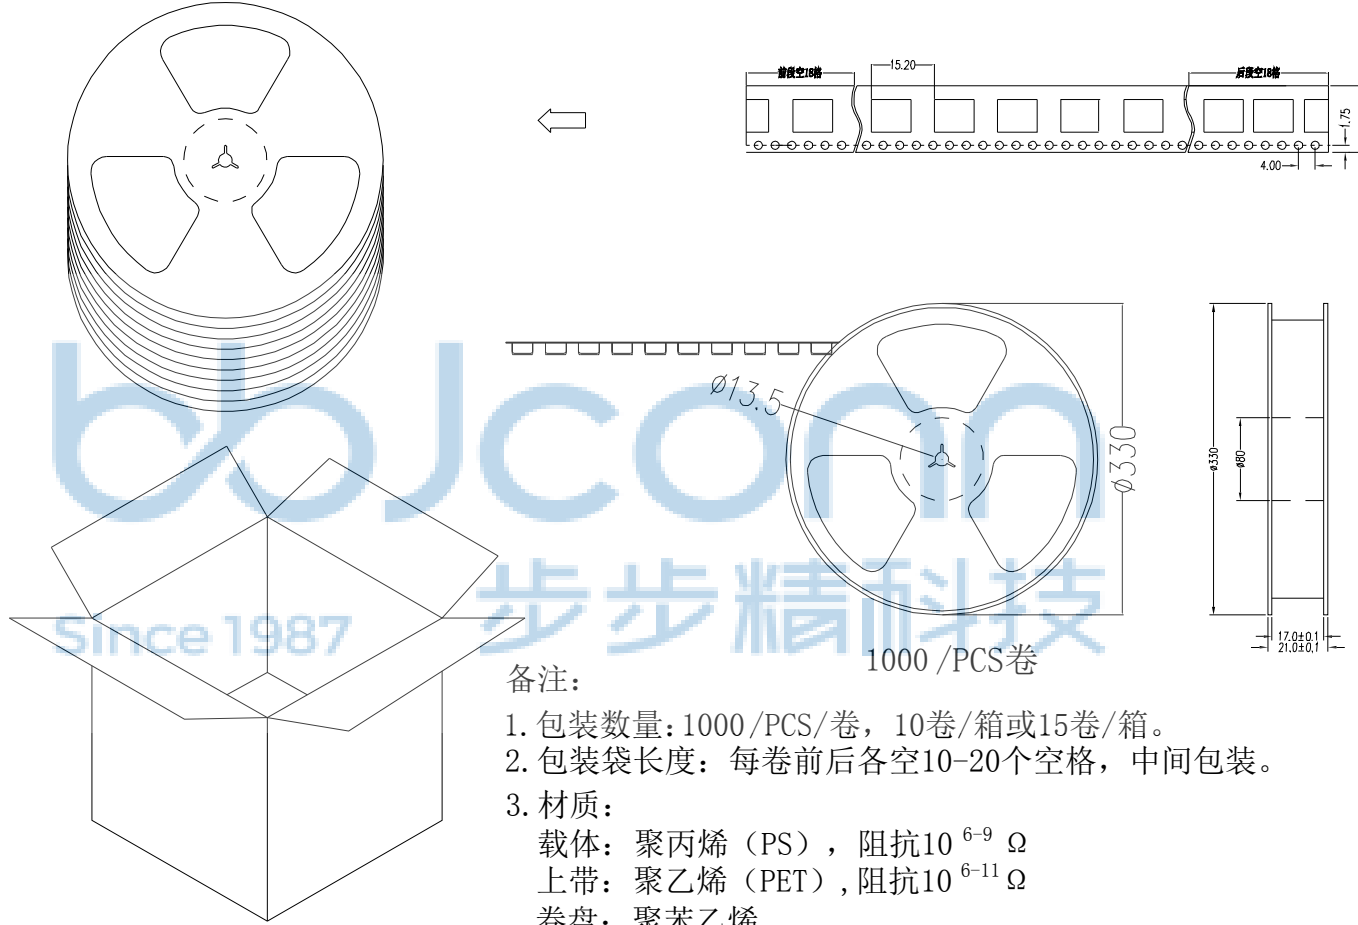

备注:

1. 包装数量: 1000 / PCS / 卷, 10 卷 / 箱或 15 卷 / 箱。
2. 包装袋长度: 每卷前后各空 10-20 个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: MICRO-5P 小牛角 4.8 L=5.06 平口 铜壳 亮锡	
APPD. JM_Zheng 23/05'02		PJ. NO.: MC.01.62-21-1001	
CHKD. LYX 23/05'02		SIZE: A4 DRW NO.:	
PDWG.NO: 0113-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF 23/05'02		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	