

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	


Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:


- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kg Max.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: -30°C~80°C

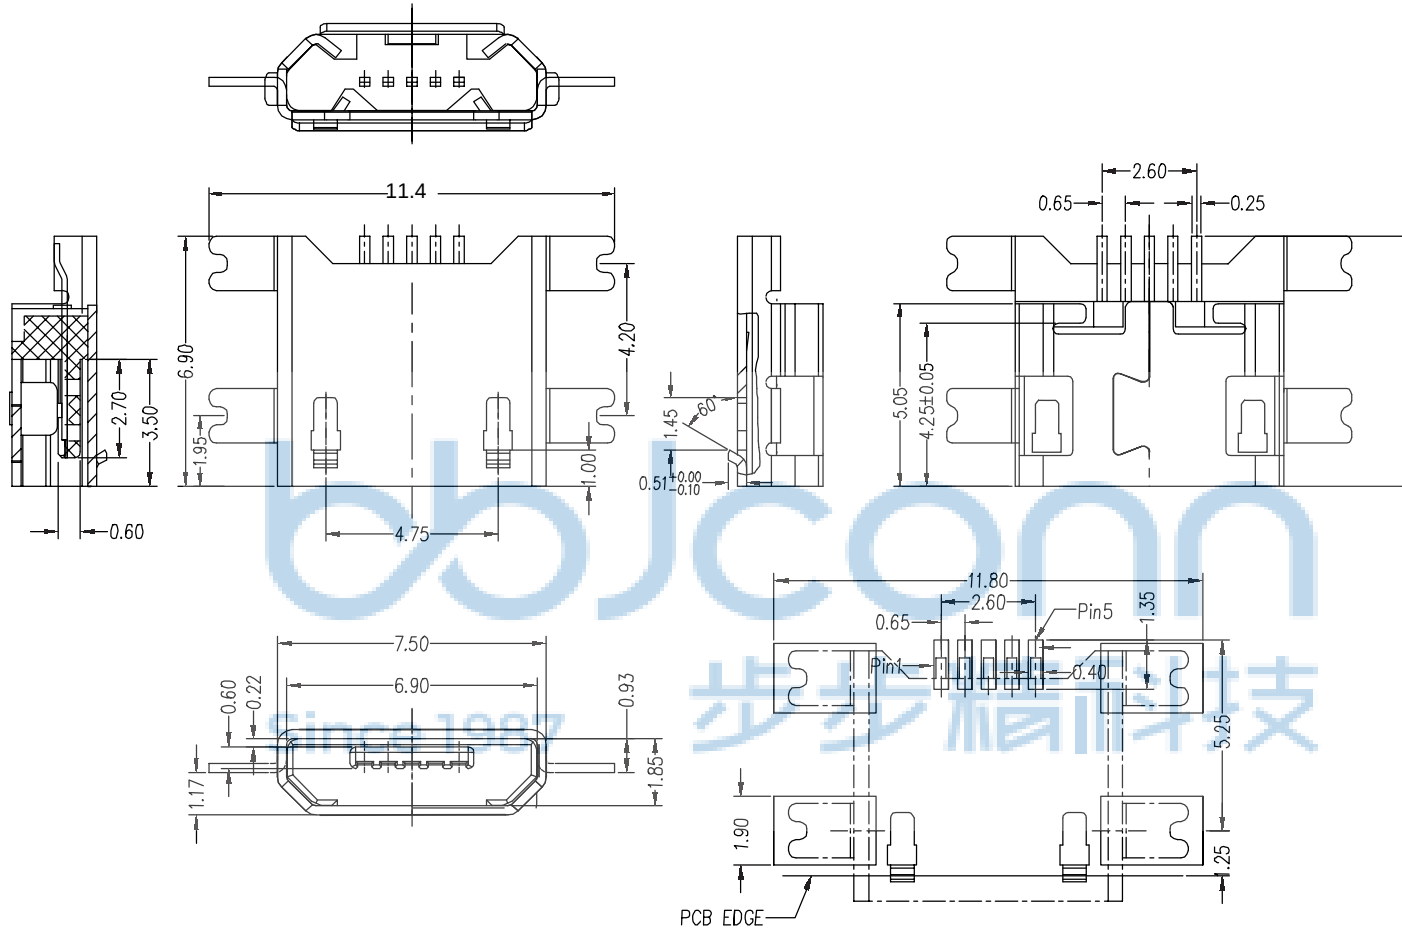

3	Shell	1	N/A
2	Contact	5	N/A
1	Housing	1	N/A
No.	Name	Q'ty	Finish



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
PDWG.NO: 0113-1		DR. SGF		23/05/02		NAME: MICRO-5P L=6.90 沉板1.17 四脚贴片 平口 铜壳 雾锡	
APPD. JM_Zheng		23/05/02		PJ. NO.: MC.01.72-11-1001		SIZE: A4 DRW NO.:	
CHKD. LYX		23/05/02		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A3		UNIT: mm		PAGE: 1/1	

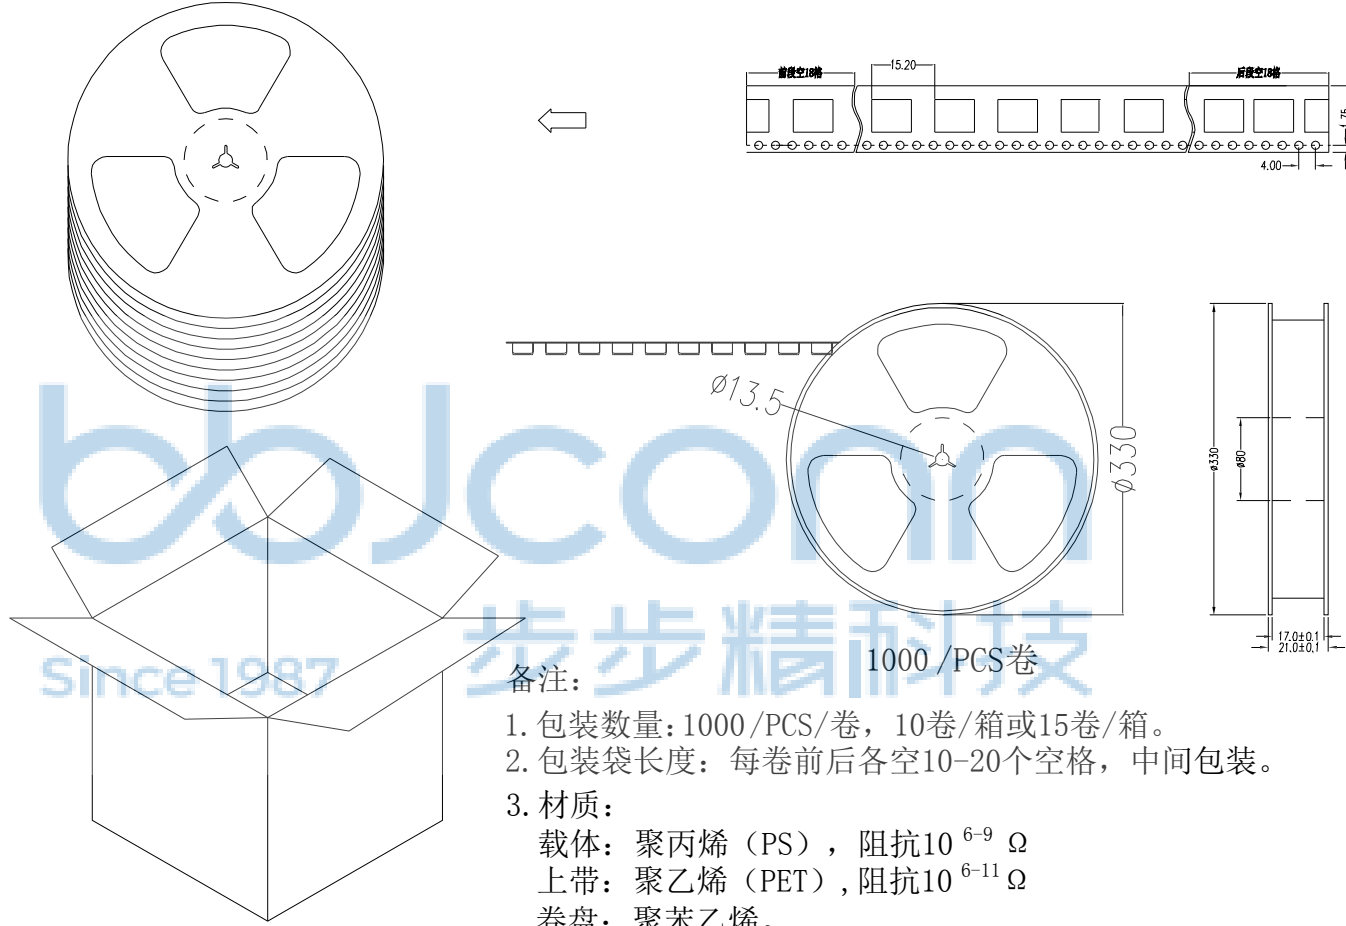

- 备注:
- 1000 / PCS 卷
- 包装数量: 1000 / PCS / 卷, 10 卷 / 箱或 15 卷 / 箱。
 - 包装袋长度: 每卷前后各空 10-20 个空格, 中间包装。
 - 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$		NAME: MICRO-5P L=6.90 沉板1.17 四脚贴片 平口 铜壳 雾锡			
APPD.	JM_Zheng	23/05'02	PJ. NO.: MC.01.72-11-1001		SIZE: A4 DRW NO.:		
CHKD.	LYX	23/05'02	FINISH: SEE NOTES		MAT'L.: SEE NOTES		
PDWG.NO:	0113-1	DR.	SGF	23/05'02	SCALE: N/A	REV.: A3	PAGE: 1/1