

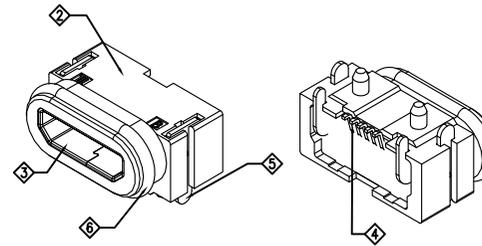
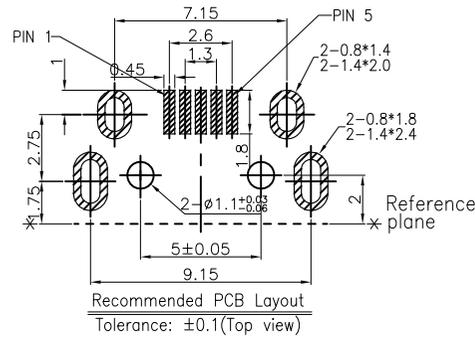
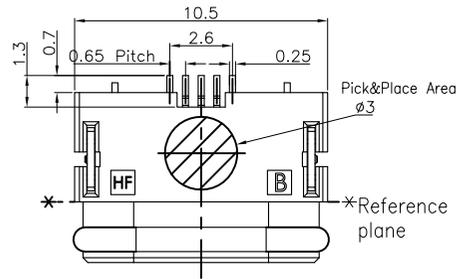
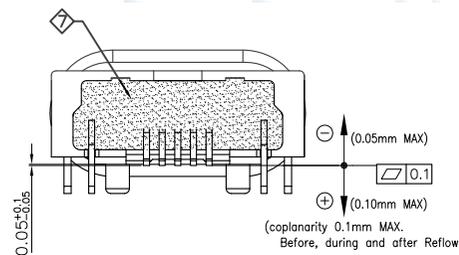
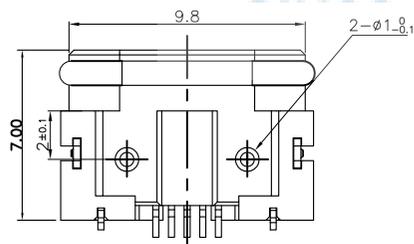
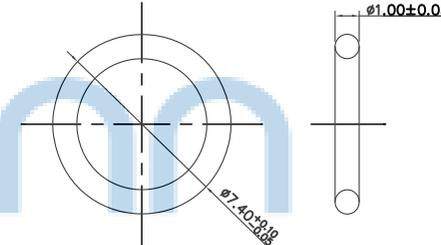
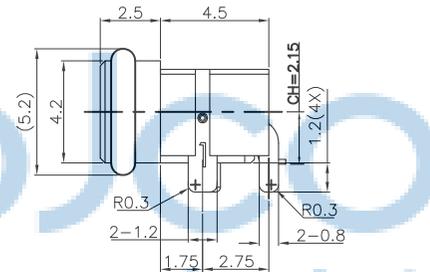


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

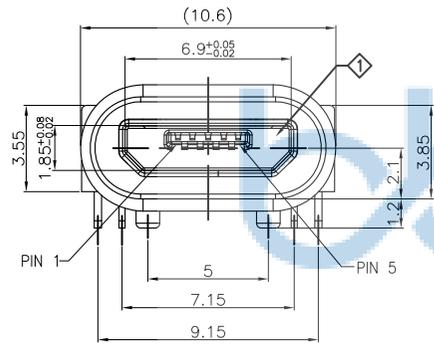

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
 - 1-2. CONTACT RESISTANCE: 30m MAX. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 3.6 KGF (MAX)
 - 2-2. WITHDRAWAL FORCE : 0.8 KGF(Reference)
- DURABILITY: 10,000 CYCLES .
- WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7(1m,30min)
- PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
- OVAL RING
 - 6-1. The amount of low molecular siloxanes(B3'D10) is less than 200ppm
 - 6-2. Hardness of silicone rubber:70°
 - 6-3. Horizontal flash 0.1max;Longitudinal flash 0.10max
- BODY WITH O-RING'S SEAL AREA BURRS IS 0.05mm Max.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.



⑦	BOND	1	----	----
⑥	Oval ring	1	----	----
⑤	TERMINAL	2	Copper Alloy T=0.3	Under plating: Ni plating All area: Sn plating
④	CONTACT	5	Copper Alloy T=0.20	Under plating: Ni plating Contact area: Gold flash plating Soldering area: Sn plating
③	SHELL	1	Stainless Steel T=0.25	1st: Cu, 2nd: Ni PLATED
②	COVER	1	PA9T(BLACK)	UL-94V-0
①	HOUSING	1	LCP(BLACK)	UL-94V-0
ITEM	PART NAME	QTY	MATERIAL	REMARK



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0523-1

深圳市步步精科技有限公司

NAME: Micro 5P 防水母座 90度 L=7.00 四脚插 带柱 端子SMT 平口 不锈钢外壳 雾锡 IPX7 带防水圈 (04-1185-375)

PJ. NO.: MC.01.52-11-J001


SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

APPD.	JM_Zheng	23/05'02
CHKD.	LYX	23/05'02
DR.	SGF	23/05'02

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

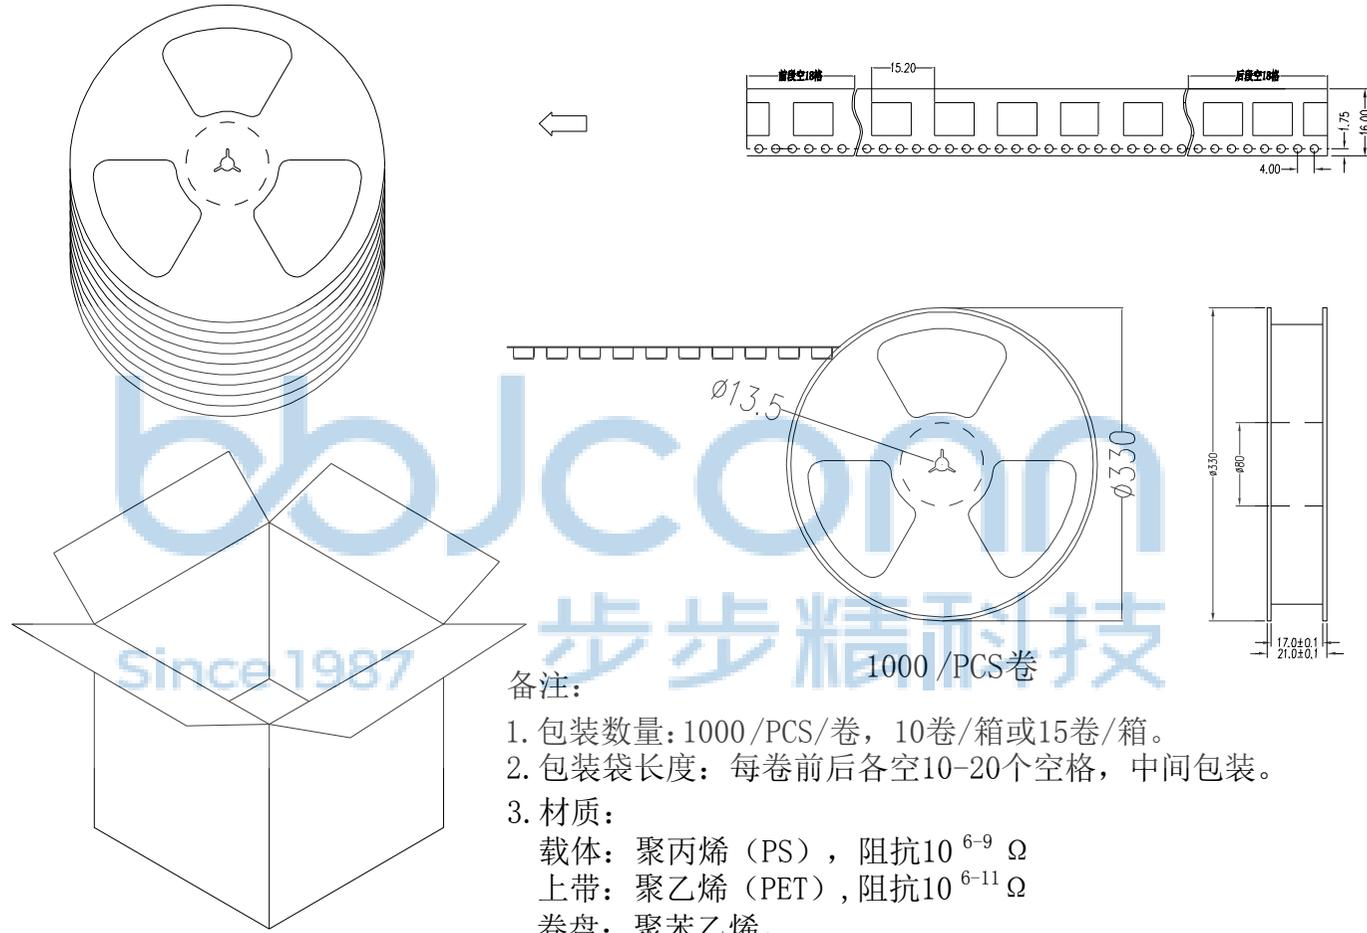

1000 / PCS 卷

备注:

1. 包装数量: 1000 / PCS / 卷, 10卷 / 箱或15卷 / 箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		深圳市步步精科技有限公司	
CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: Micro 5P 防水母座 90度 L=7.00 四脚插 带柱 端子SMT 平口 不锈钢外壳 雾锡 IPX7 带防水圈 (04-1185-375)	
APPD.	JM_Zheng 23/05'02	PJ. NO.: MC.01.52-11-J001	
CHKD.	LYX 23/05'02	SIZE: A4 DRW NO.:	
PDWG.NO: 0523-1	DR. SGF 23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1