



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	

SPECIFICATIONS:

1. TEMPERATURE RANGE: -30~70°
2. RATED VOLTAGE/CURRENT: DC30V /5A
3. CONTACT RESISTANCE: ≤0.03Ω
4. INSULATION RESISTANCE: ≥100MΩ DC250V
5. WITHSTANDING VOLTAGE: AC500V (50Hz)/min
6. INSERTION FORCE: 3~20N
7. DURABILITY CYCLES: 5000CYCLES

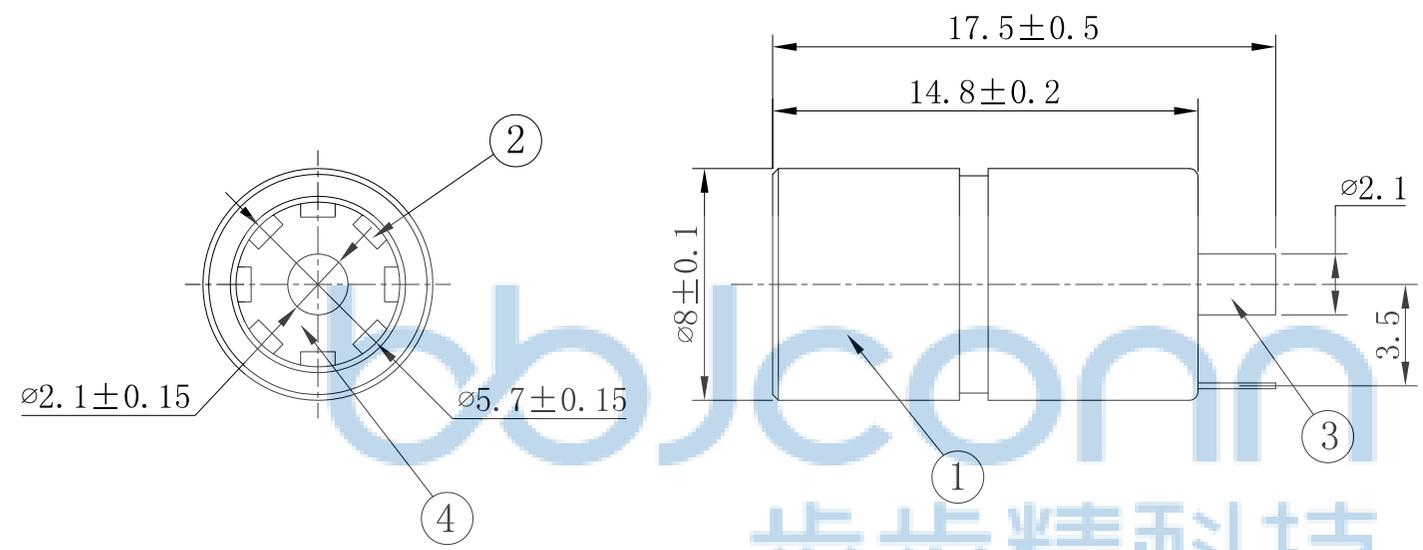

ELECTRICAL CIRCUIT



4	INSULATION	1	PA66	BLACK
3	PIN	1	BRASS	D. CuSn
2	TERMINAL	1	PHOSPHOROUS BRONZE T=0.20	/
1	BODY	1	COPPER ALLOY	D. CuSn
NO.	DESCRIPTION	QTY	MATERIAL	FINISH

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0050-2

DR. SGF 23/05'02

APPD. JM\_Zheng 23/05'02

CHKD. LYX 23/05'02

NAME: DC插座 DC-084 2.0针 全铜 带接地片

PJ. NO.: DC.05.62-11-2001

SIZE: A4 | DRW NO.:


FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A3 | UNIT: mm | PAGE: 1/1

深圳市步步精科技有限公司


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

PE袋规格: 260\*185

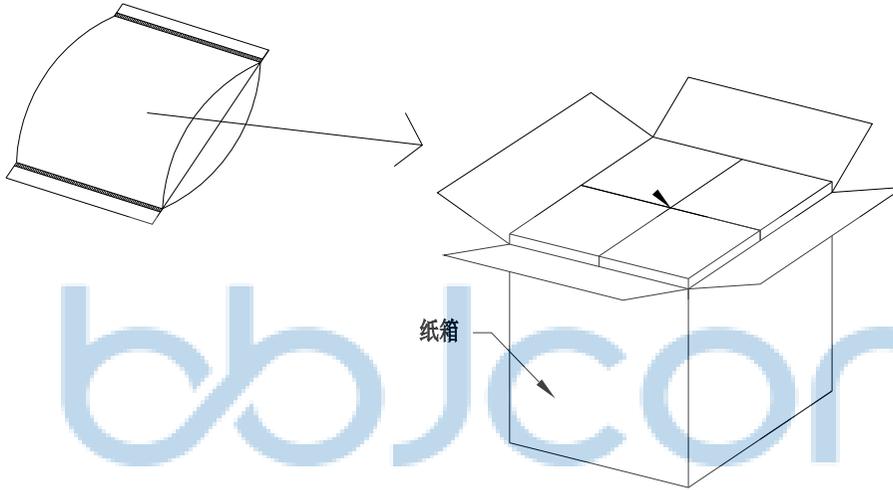

bbJconn  
Since 1987 步步精科技

成品标签



1. 包装要求:
  - 1.1 每PE袋包装500pcs;
  - 1.2 每1袋放一小纸盒;
  - 1.3 每20个小纸盒放一个纸箱,共计10000PCS
  - 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    X': ±3" .XX: ±0.25    .X": ±2" .XXX: ±0.13    .XX": ±1"		NAME: DC插座 DC-084 2.0针 全铜 带接地片 PJ. NO.: DC.05.62-11-2001 SIZE: A4   DRW NO.: FINISH: SEE NOTES   MAT'L.: SEE NOTES SCALE: N/A   REV.: A3   UNIT: mm   PAGE: 1/1		
PDWG.NO: 0050-2	DR. SGF	23/05'02	APPD. JM_Zheng	23/05'02	CHKD. LYX	23/05'02