
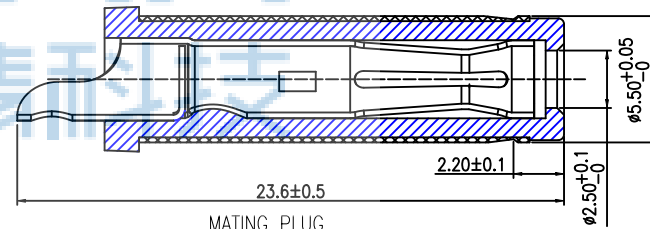


SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30m Ω MAX.
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES



MATING PLUG

C	SPRING	COPPER ALLOY	Sn80u" MIN./Ni 40u".	1
B	CENTER PIN	BRASS	Sn80u" MIN./Ni 40u".	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .X': ±1"

NAME:
DC座 DC-2.5针 全铜 卧式 三脚插 (DC550250-0366-20000H)

APPD. JM_Zheng 23/05'02

PJ. NO.: DC.02.62-12-G012

CHKD. LYX 23/05'02






SIZE: A4 DRW NO.:

PDWG.NO: 0386-2


FINISH: SEE NOTES MAT'L: SEE NOTES

DR. SGF 23/05'02


SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

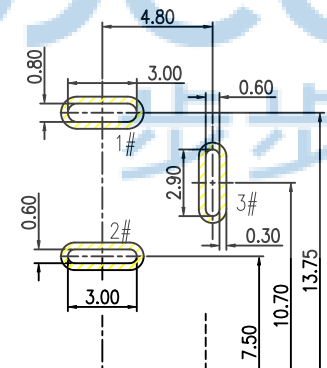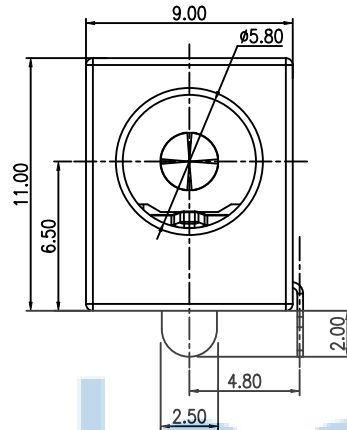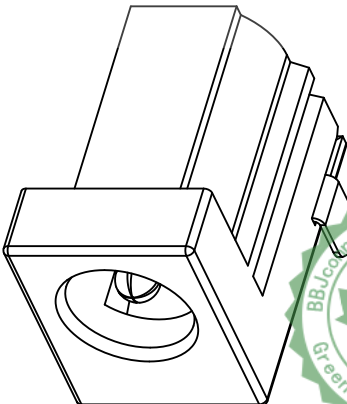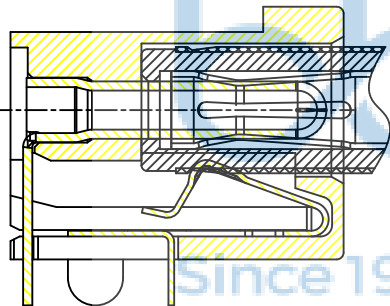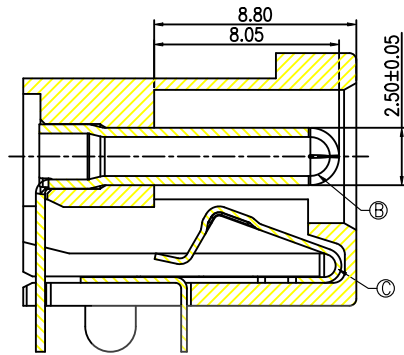

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05




拉出方向

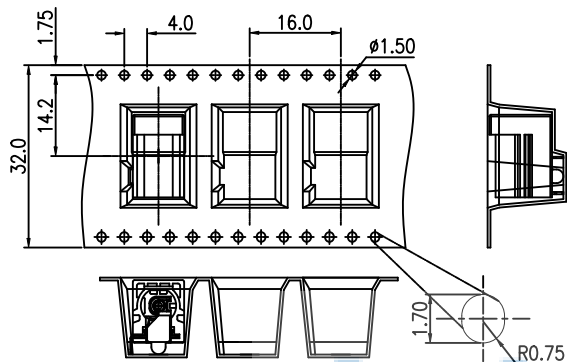


拉出方向

包装盘:外径 ϕ 380;内径 ϕ 100

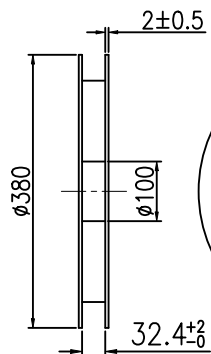

拉出方向




包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带



备注:

- 材料规格:
 - 载带:透明
 - 包装盘:蓝色
 - 纸箱: L=385,W=385,H=380
- 包装数量:

400PCS/卷, 10卷(4000PCS)/箱



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0386-2



深圳市步步精科技有限公司

.X: ± 0.38	.X': $\pm 3'$	NAME:
.XX: ± 0.25	.X': $\pm 2'$	DC座 DC-2.5针 全铜 卧式 三脚插 (DC550250-0366-20000H)
.XXX: ± 0.13	.XX': $\pm 1'$	
APPD. JM_Zheng 23/05'02	CHKD. LYX 23/05'02	PJ. NO.: DC.02.62-12-G012
DR. SGF 23/05'02	SCALE: N/A	SIZE: A4
	REV.: A3	UNIT: mm
		PAGE: 1/1