


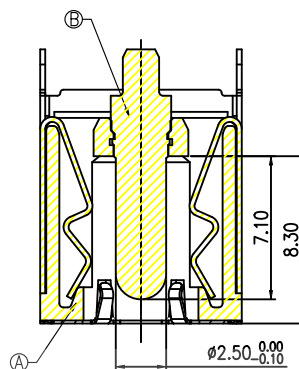

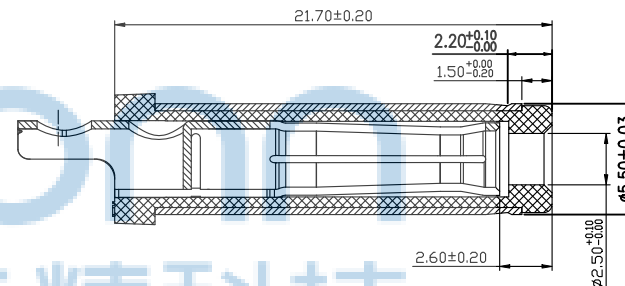


SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m Ω MAX.(INITIAL)
50m Ω MAX.(FINAL)
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

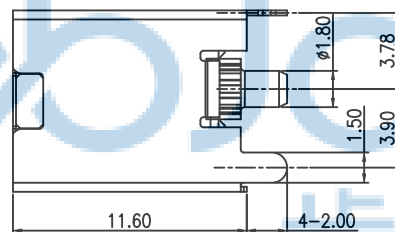


SECTION A-A

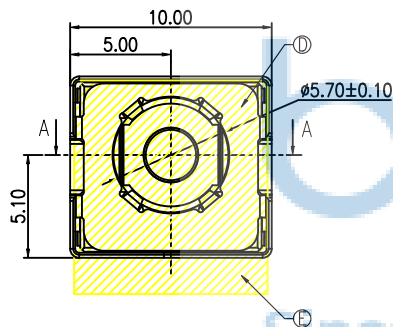


MATING PLUG

SCHEMATIC



E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



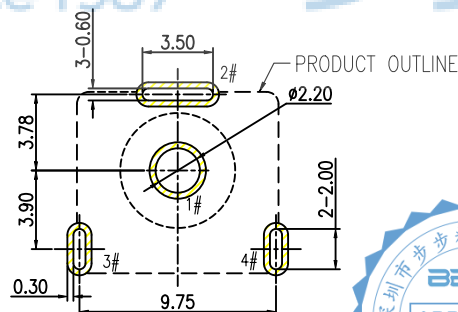


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ± 0.05



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X': $\pm 2'$.XXX: ± 0.13 .XX': $\pm 1'$		NAME: DC座 DC-2.5针 全铜 直立式180° 三脚插 (DC50250-1074-20000R)
APPD.	JM_Zheng	23/05'02	P.J. NO.: DC.02.72-12-G002	
CHKD.	LYX	23/05'02	SIZE: A4 DRW NO.:	
PDWG.NO:	0386-2	DR.	SGF	23/05'02
		FINISH: SEE NOTES		MAT'L: SEE NOTES
		SCALE: N/A		REV.: A3 UNIT: mm PAGE: 1/1

拉出方向


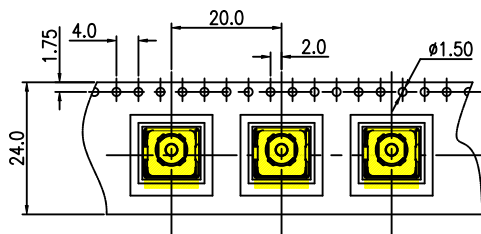


总共10层

PE袋:


外箱, 1PCS

透明胶带



拉出方向

拉出方向



备注:

- 材料规格:
 - 载带: T=0.50mm
 - 包装盘: 蓝色
 - 纸箱: L=385, W=385, H=300
- 包装数量:

250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD.	JM_Zheng 23/05'02	NAME:	
CHKD.	LYX 23/05'02	DC座 DC-2.5针 全铜 直立式180° 三脚插 (DC550250-1074-20000H)	
PDWG.NO:	0386-2	P.J. NO.: DC.02.72-12-G002	
DR.	SGF 23/05'02	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L: SEE NOTES	
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	