


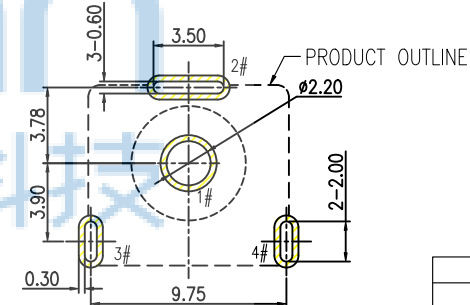
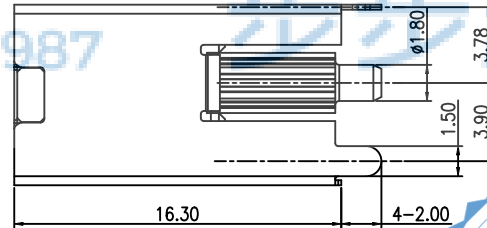
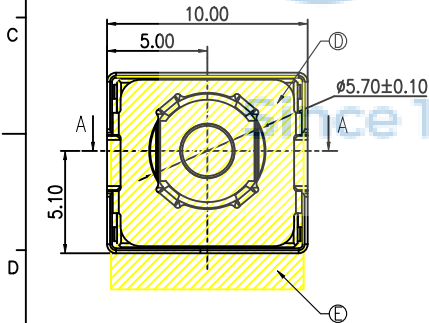
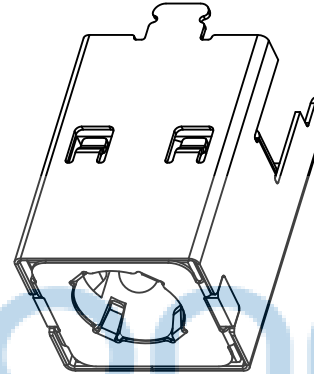
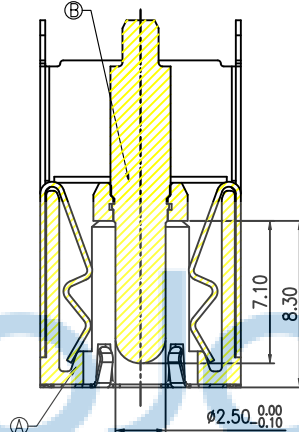


SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m? MAX.(INITIAL)
50m? MAX.(FINAL)
3. INSULATION RESISTANCE: 100 M? MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

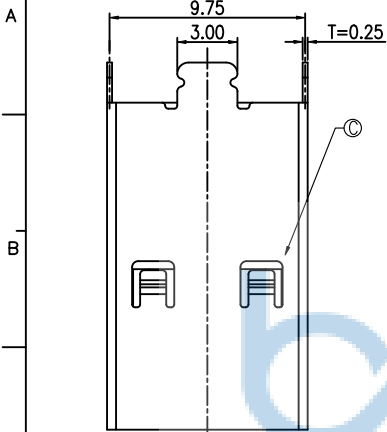

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

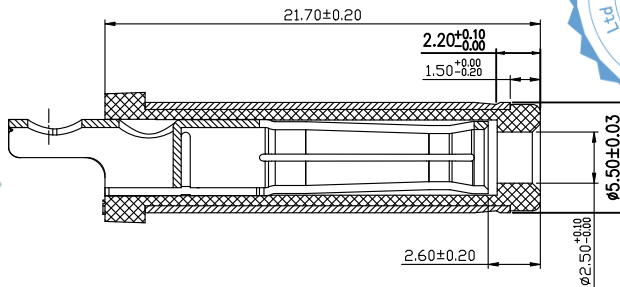



MATING PLUG

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0386-2		深圳市步步精科技有限公司						
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X': ±2' .XX': ±1'		NAME: DC座 DC-2.5针 全铜 直立式180° 三脚插 (DC550250-1079-20000H)		
		APPD.	JM_Zheng 23/05'02			PJ. NO.: DC.02.72-12-G007		
		CHKD.	LYX 23/05'02			SIZE: A4 DRW NO.:		
		FINISH: SEE NOTES		MAT'L: SEE NOTES				
SCALE: N/A		REV.: A3		UNIT: mm		PAGE: 1/1		


拉出方向

bbJconn
Since 1987 步步精科技

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

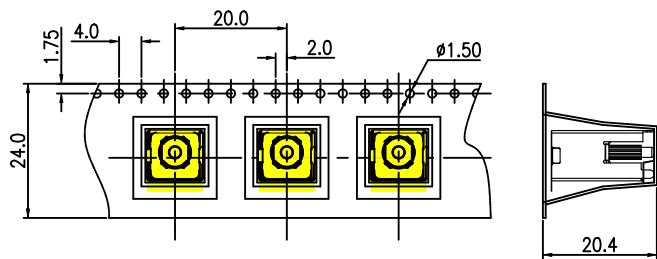

包装盘标签

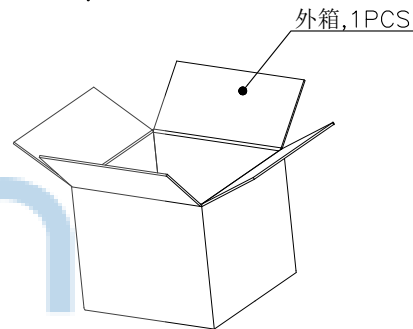


外箱, 1PCS


拉出方向

总共10层


透明胶带



PE袋:



拉出方向



备注:

- 材料规格:
 - 载带: T=0.50mm
 - 包装盘: 蓝色
 - 纸箱: L=385, W=385, H=300
- 包装数量:

250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG NO: 0386-2

深圳市步步精科技有限公司	
NAME:	DC座 DC-2.5针 全铜 直立式180° 三脚插 (DC550250-1079-20000H)
APPD.	JM_Zheng 23/05/02
CHKD.	LYX 23/05/02
DR.	SGF 23/05/02
PJ. NO.:	DC.02.72-12-G007
SIZE:	A4
FINISH:	SEE NOTES
MAT'L:	SEE NOTES
SCALE:	N/A
REV.:	A3
UNIT:	mm
PAGE:	1/1