
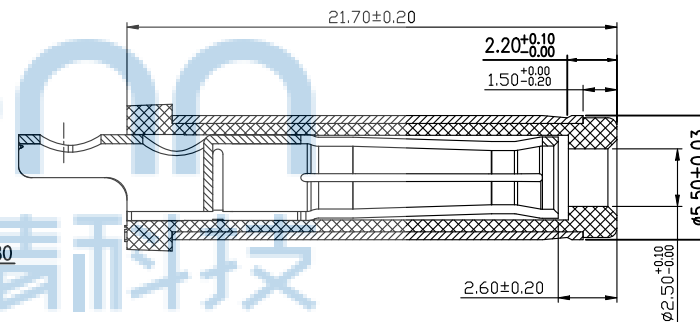
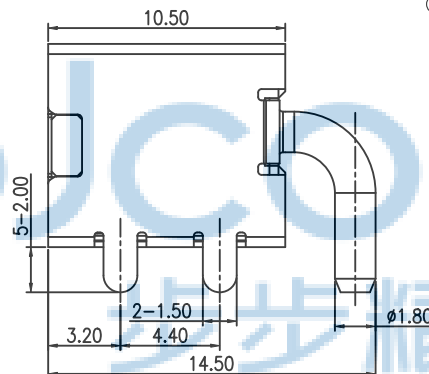
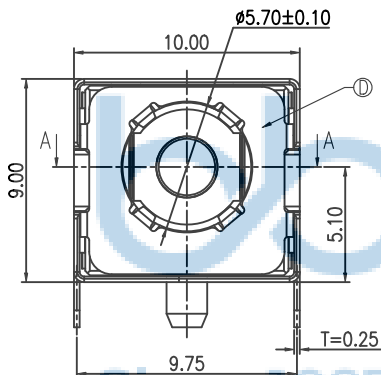
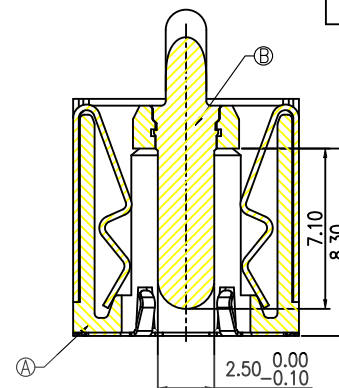




REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

SPECIFICATION:

1. RATING: DC 30V 20A
2. CONTACT RESISTANCE:
30m? MAX(INITIAL).
50m? MAX(FINAL).
3. INSULATION RESISTANCE: 100 M? MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES




MATING PLUG

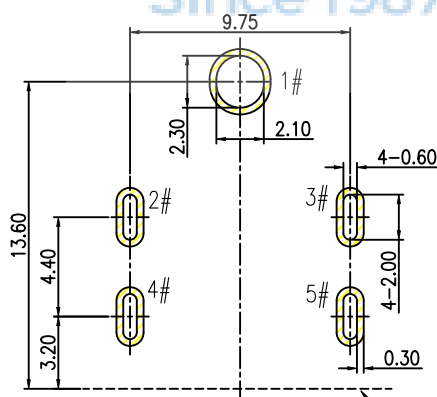

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

PRODUCT EDGE



D	GROUND	SUS 304		1
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X': ±3"
.X': ±2"
.XX': ±1"

NAME:

DC座 DC-2.5针 全铜 卧式 四脚插 (DC550250-1194-20000H)



深圳市步步精科技有限公司

APPD.

JM_Zheng 23/05/02

CHKD.

LYX 23/05/02

PDWG.NO:

0386-2

DR.

SGF 23/05/02



PJ. NO.: DC.02.72-12-G009

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

拉出方向

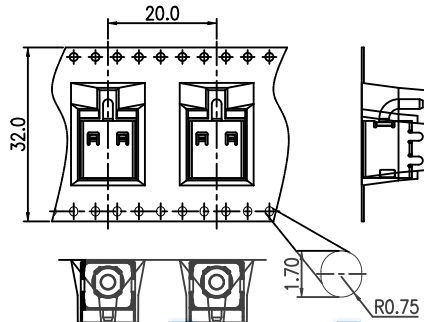


包装盘标签

拉出方向

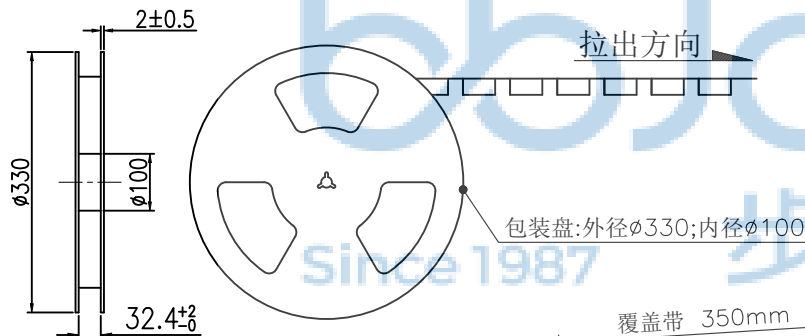

覆盖带 350mm 最少.

拉出方向




总共10层

PE袋:

外箱,1PCS

透明胶带



备注:

- 材料规格:
 - 载带:T=0.50mm
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=380
- 包装数量:

250PCS/卷, 10卷(2500PCS)/箱
- 上盖带剥离力: 0.1N~0.7N(10~70gf);

剥离角度: 165°~180°;
剥离速度: 300mm/分钟.



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0386-2

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .X': ±1"	NAME: DC座 DC-2.5针 全铜 卧式 四脚插 (DC550250-1194-20000H)
APPD. JM_Zheng 23/05/02	CHKD. LYX 23/05/02	PJ. NO.: DC.02.72-12-G009
DR. SGF 23/05/02	SCALE: N/A	SIZE: A4
	REV.: A3	UNIT: mm
		PAGE: 1/1