
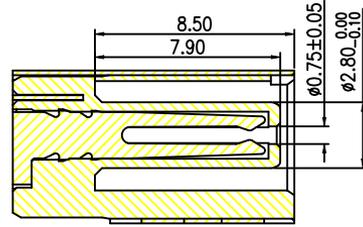








REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

SPECIFICATION:



1. RATING: DC 20V 6.5A
2. CONTACT RESISTANCE: 30m Ω MAX.
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

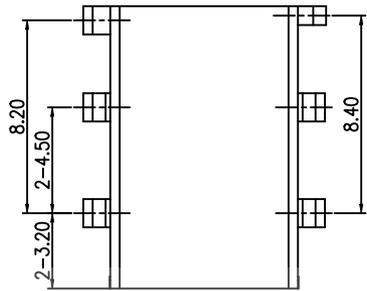

SECTION A-A

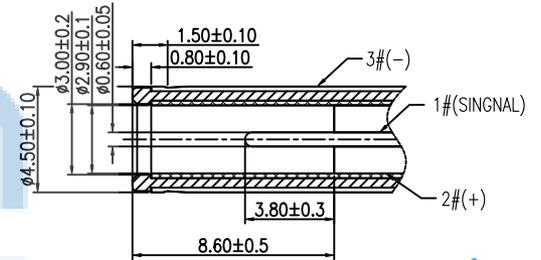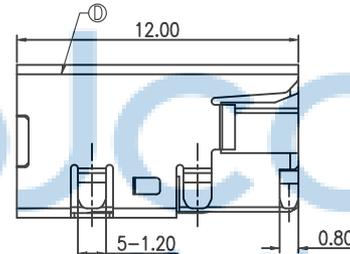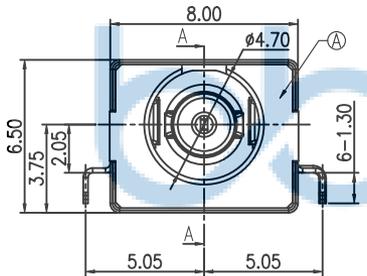


MATING PLUG

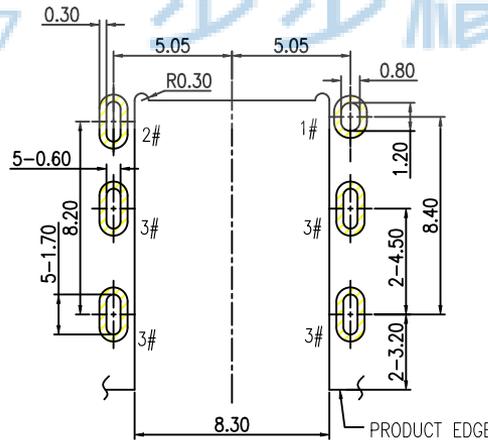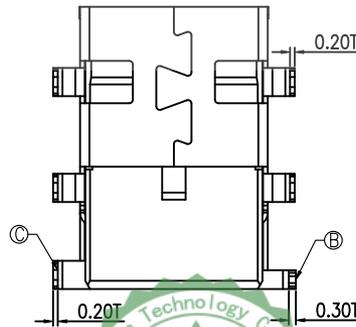

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ± 0.05

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	SHELL	COPPER ALLOY	Ni 50u"MIN.	1
C	SPRING	COPPER ALLOY	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
B	CENTER PIN	COPPER ALLOY	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0386-2

深圳市步步精科技有限公司

NAME: DC座 DC-0.6针 全铜 沉板式 六脚插 (DC450060-0148-30000H)

APPD.: JM_Zheng 23/05'02

CHKD.: LYX 23/05'02

DR.: SGF 23/05'02

PJ. NO.: DC_03.K2-12-G001


SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	




拉出方向

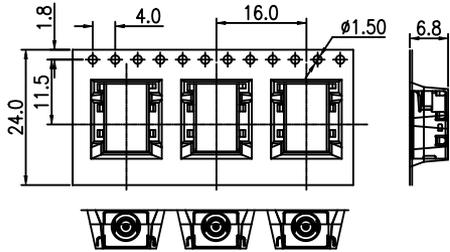

总共10层

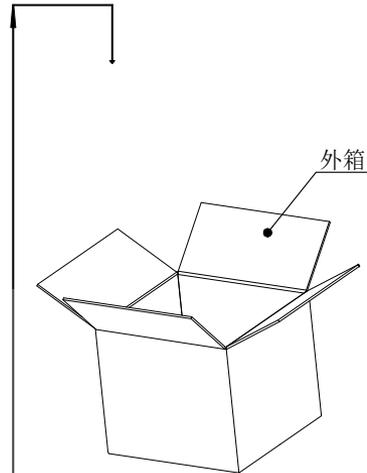

透明胶带

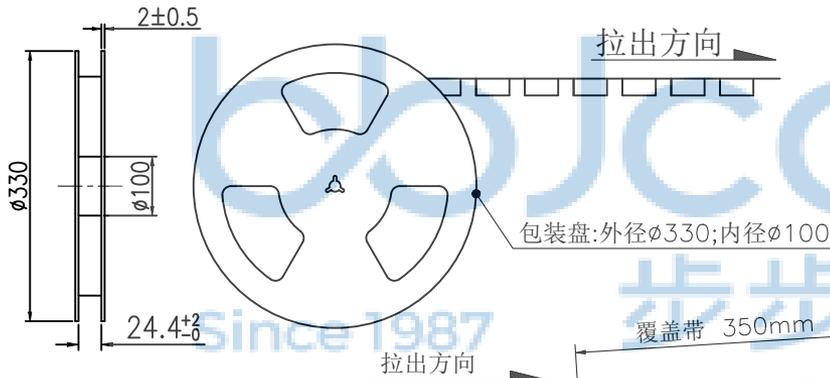

- 备注:
- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=300
 - 包装数量: 600PCS/卷, 10卷(6000PCS)/箱
 - 上盖带拨离力: 0.1N~0.7N(10~70gf); 拨离角度: 165°~180°; 拨离速度: 300mm/分钟。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD.	JM_Zheng 23/05'02	NAME:	DC座 DC-0.6针 全铜 沉板式 六脚插 (DC450060-0148-3000H)
CHKD.	LYX 23/05'02	SIZE:	A4 DRW NO.:
PDWG.NO:	0386-2	FINISH:	SEE NOTES
DR.	SGF 23/05'02	MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A3
		UNIT:	mm
		PAGE:	1/1