
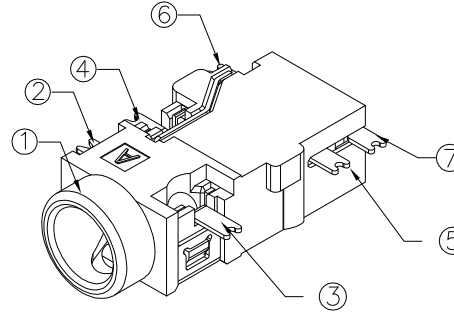


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	



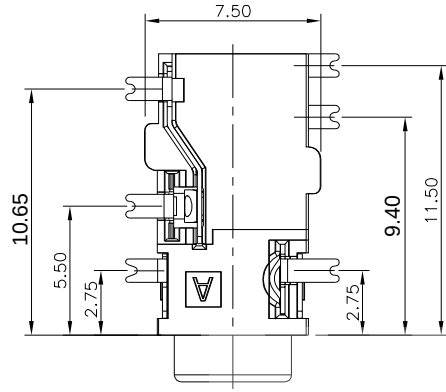


3D VIEW


NOTES:

1. REQUEST OF THE SPECIFICATION:


- 1.1 CONTACT CURRENT RATING: 1A.;
- 1.2 CONTACT RESISTANCE: 100 mΩ MAX.;
- 1.3 INSULATION RESISTANCE: 100MΩ MIN.;
- 1.4 DIELECTRIC WITHSTANDING: 500V AC MIN.;
- 1.5 DURABILITY: 5,000 CYCLES MIN.;
- 1.6 CONNECTOR MATING FORCES: 29.8N (3.00Kgf) MAX.;
- 1.7 CONNECTOR UNMATING FORCES: 2.98N(0.30Kgf) MIN.;

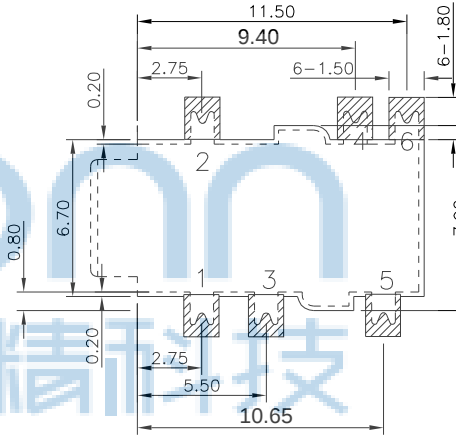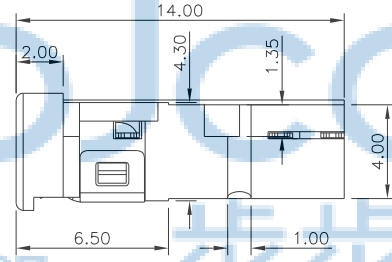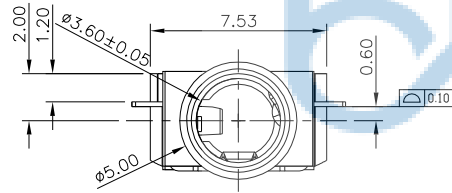


正贴 P.C.B LAYOUT
TOP VIEW

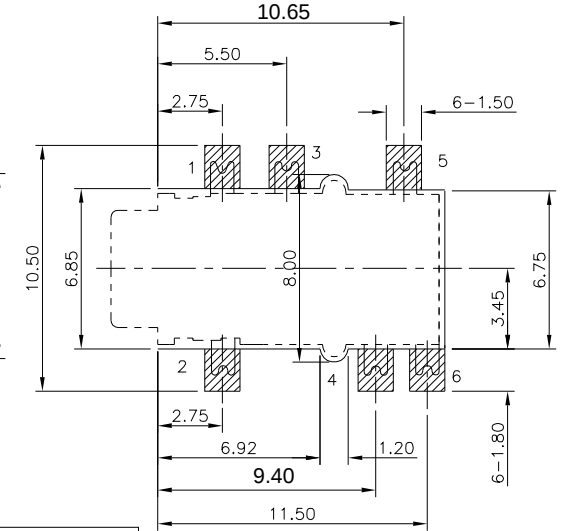


反贴 P.C.B LAYOUT
TOP VIEW



SCHEMATIC

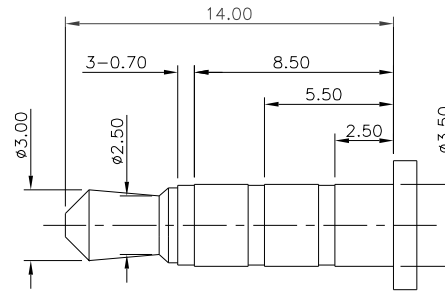

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

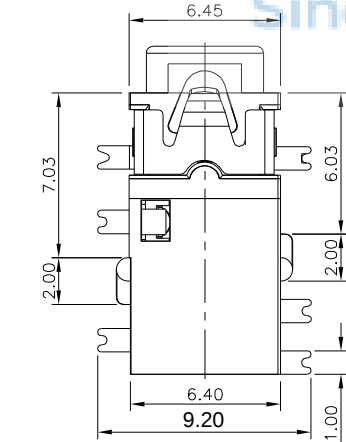

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
7	TERMINAL 6#	1	PHOSPHOR BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA	T=0.20
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA	T=0.20
5	TERMINAL 4#	1	SUS304; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.	T=0.20
4	TERMINAL 3#	1	SUS304; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
3	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
2	TERMINAL 1#	1	SUS304; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.	T=0.20
1	HOUSING	1	PPA COLOR BLACK	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司


NAME:	PJ35A028-F06J1BR-A3.5耳机座 沉板1.4 有头 6PIN 全贴 半金 编带
PJ. NO.:	PJ.01.22-01-3003
SIZE:	A4
DRW NO.:	
FINISH:	SEE NOTES
MAT'L.:	SEE NOTES
SCALE:	N/A
REV.:	A0
UNIT:	mm
PAGE:	1/1

PDWG.NO: 0076-1


APPD.	JM_Zheng	23/05'02
CHKD.	LYX	23/05'02
DR.	SGF	23/05'02

1载带=1000PCS




1外箱=1000PCSX10盘载带=10000PCS

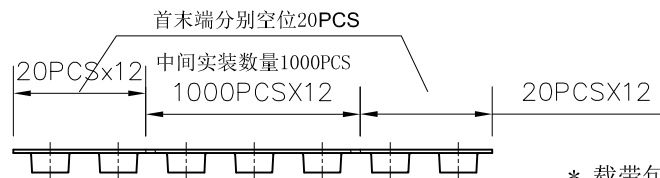

* 载带包装时请依此引出方向为标准

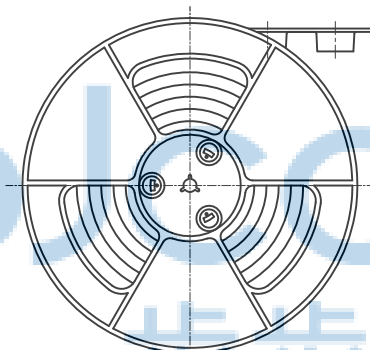


卷盘包装示意

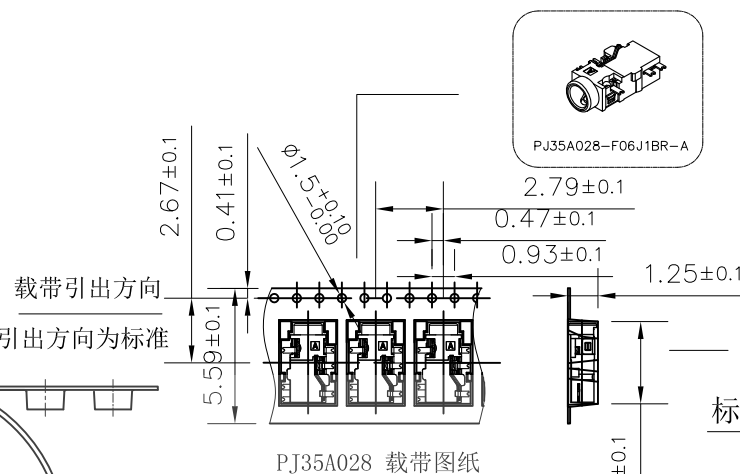

标签一

干燥剂 薄膜袋 (HDPE)

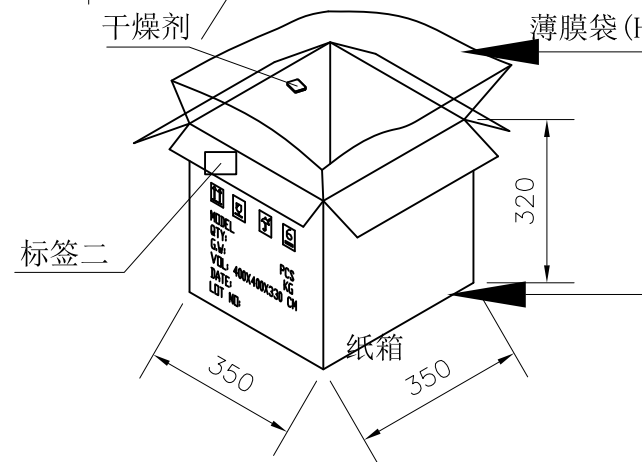

标签二

包材名称	材料及厚度 (mm)	规格 (mm)
PJ35A028 载带	P.S (白色透明) T=0.30	12500X24.00X4.50
载盘	HI P.S (蓝色)	Ø330X28.40
自粘带	PET (白色透明)	W=21.30 T=0.06
PE-375X450X0.06-A	PE (白色透明)	450X375X0.06
ZK-350X350X320-A	K=K t=4	350X350X320
三角板	A=A+ t=4	260X300



备注:

1. 每箱内必须放干燥剂;
2. 每箱必须用PE带密封包装;
3. 参考《高温材料管理规定》进行作业;
4. 条码+二维码标签和交货标签按客户要求制作;

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
PDWG.NO: 0076-1		DR. SGF		23/05/02		NAME: PJ35A028-F06J1BR-A3.5耳机座 沉板1.4 有头 6PIN 全贴 半金 编带	
APPD. JM_Zheng		23/05/02		PJ. NO.: PJ.01.22-01-3003		SIZE: A4 DRW NO.:	
CHKD. LYX		23/05/02		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 1/1	