

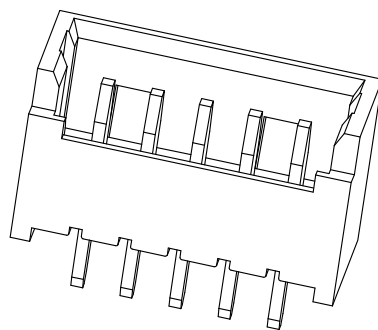
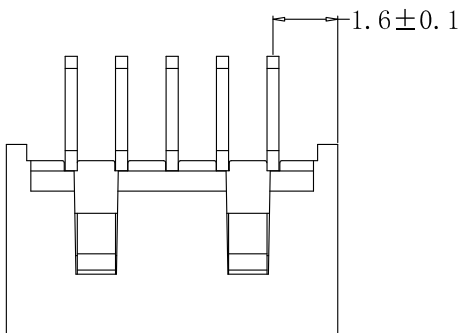


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

使用温度范围 (Ambient temperature Range):-25° ~+85°
适用基板厚度 Applicable PCboard thickness):0.8mm~1.6mm
额定电压 (Voltage rating):50V AC,DC
额定电流 (Current rating):1A
接触电阻 (Contact Resistance): ≤0.01Ω
绝缘电阻 (Insulation Resistance): ≥500MΩ
耐压 (Withstand Voltage):500V/min
材料 (Material)
1. 基座: LCP 94V-0 or ul
2. 插针: 黄铜




1.25直针	A-mm	B-mm
1.25-2P	1.25mm	4.50mm
1.25-3P	2.50mm	5.75mm
1.25-4P	3.75mm	7.00mm
1.25-5P	5.00mm	8.25mm
1.25-6P	6.25mm	9.50mm
1.25-7P	7.50mm	10.75mm
1.25-8P	8.75mm	12.00mm
1.25-9P	10.00mm	13.25mm
1.25-10P	11.25mm	14.50mm
1.25-11P	12.50mm	15.75mm
1.25-12P	13.75mm	17.00mm
1.25-13P	15.00mm	18.25mm
1.25-14P	16.25mm	19.50mm
1.25-15P	17.50mm	20.75mm
1.25-16P	18.75mm	22.00mm

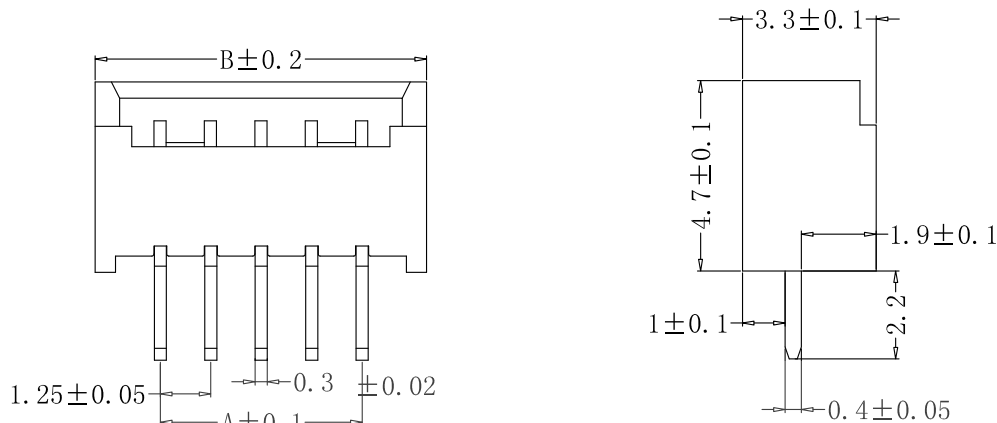


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0102-1		NAME: 1.25-3A 闭口直针 米黄色	
APPD. JM_Zheng		PJ. NO.: WT.04.65-11-1007	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. SGF		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

PE袋规格:***X*** (以实际出货为准)

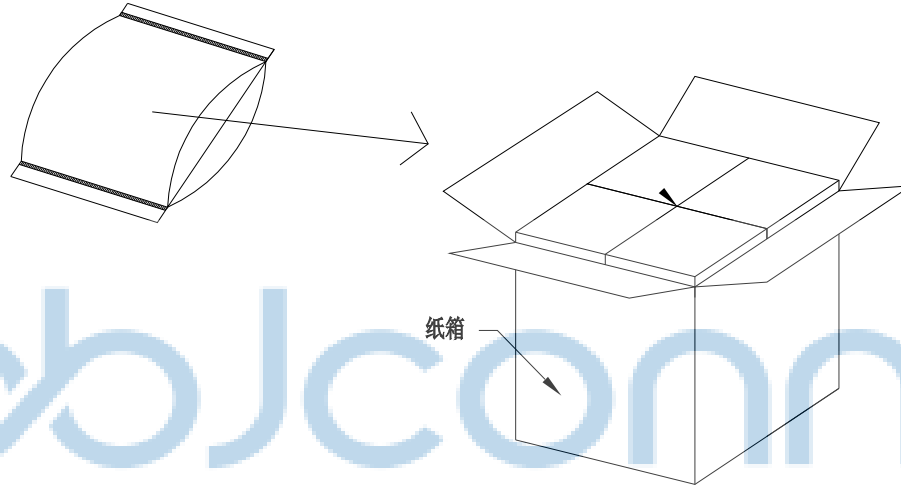

成品标签



1. 包装要求:

- 1.1 每PE袋包装2000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计40000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 1.25-3A 闭口直针 米黄色	
APPD.	JM_Zheng	PJ. NO.: WT.04.65-11-1007	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0102-1	DR. SGF	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	