


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

使用温度范围 (Ambient temperature Range):-25° ~+85°
适用线规 (Applicable Wires):AWG 28#~20#
适用基板厚度 Applicable PCboard thickness):1.7mm
额定电压 (Voltage rating):300V AC,DC
额定电流 (Current rating):5A
接触电阻 Contact Resistance): ≤0.015Ω
绝缘电阻 (Insulation Resistance): ≥1000MΩ
耐压 (Withstand Voltange):1000V/min
材料 (Material)
1. 基座: PA66 FV2
2. 插针: 黄铜





孔位	A	B
2	0	5.4
4	4.2	9.6
6	8.4	13.8
8	12.6	18.0
10	16.8	22.2
12	21.0	26.4
14	25.2	30.6
16	29.4	34.8
18	33.6	39.0
20	37.8	43.2
22	42.0	47.4
24	46.2	51.6

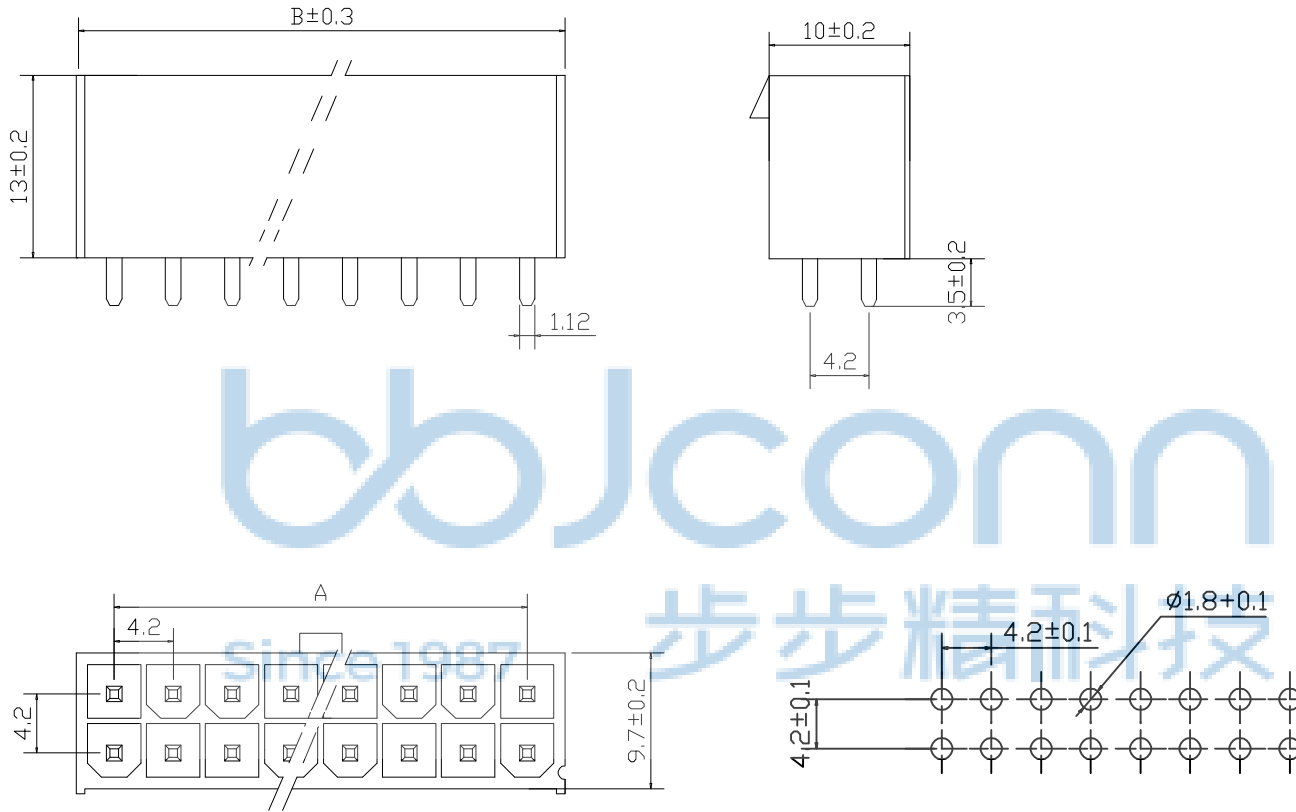

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .X*: ±3° .XX: ±0.25 .X*: ±2° .XXX: ±0.13 .XX*: ±1°		NAME: 5569-16A (4.2-2x8P) 双排直针 带扣 透明色	
APPD.	JM_Zheng	PJ. NO.: WT.11.11-11-1003	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0102-1	FINISH: SEE NOTES	MAT'L.: SEE NOTES
	DR.	SGF	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

PE袋规格:***X*** (以实际出货为准)

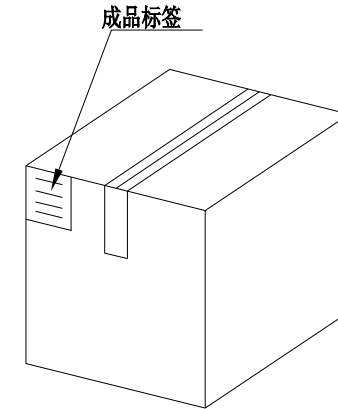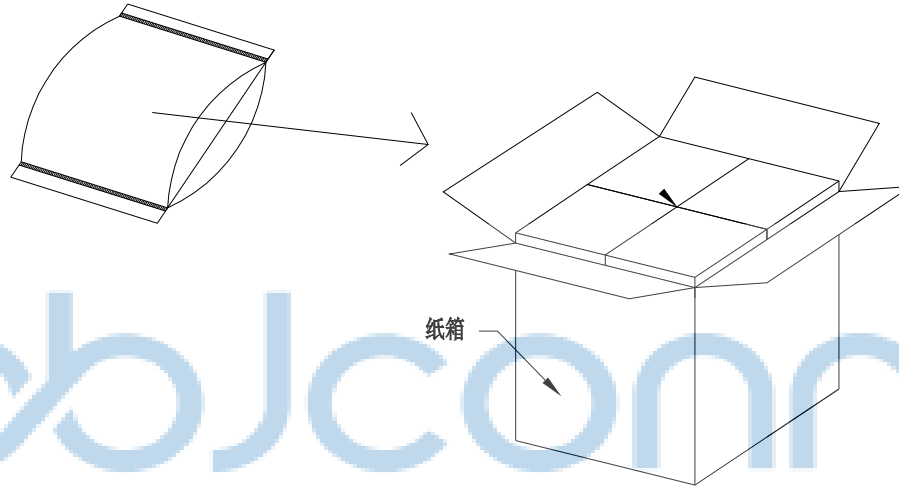

1. 包装要求:

- 1.1 每PE袋包装 200 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计4000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0102-1		NAME: 5569-16A (4.2-2x8P) 双排直针 带扣 透明色	
APPD.	JM_Zheng	PJ. NO.:	WT.11.11-11-1003
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	SGF	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2