


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

使用温度范围 (Ambient temperature Range): $-25^{\circ} \sim +85^{\circ}$
适用线规 (Applicable Wires): AWG 28#~22#
适用基板厚度 (Applicable PCboard thickness): 0.8mm~1.6mm
额定电压 (Voltage rating): 250V AC, DC
额定电流 (Current rating): 2A
接触电阻 (Contact Resistance): $\leq 0.03 \Omega$
绝缘电阻 (Insulation Resistance): $\geq 1000M \Omega$
耐压 (Withstand Voltage): 800V/min
材料 (Material)
1. 基座: PA66 增强尼龙
2. 插针: 黄铜





孔位	A	B
2	6.0	2.0
3	8.0	4.0
4	10.0	6.0
5	12.0	8.0
6	14.0	10.0
7	16.0	12.0
8	18.0	14.0
9	20.0	16.0
10	22.0	18.0
11	24.0	20.0
12	26.0	22.0
13	28.0	24.0
14	30.0	26.0
15	32.0	28.0
16	34.0	30.0

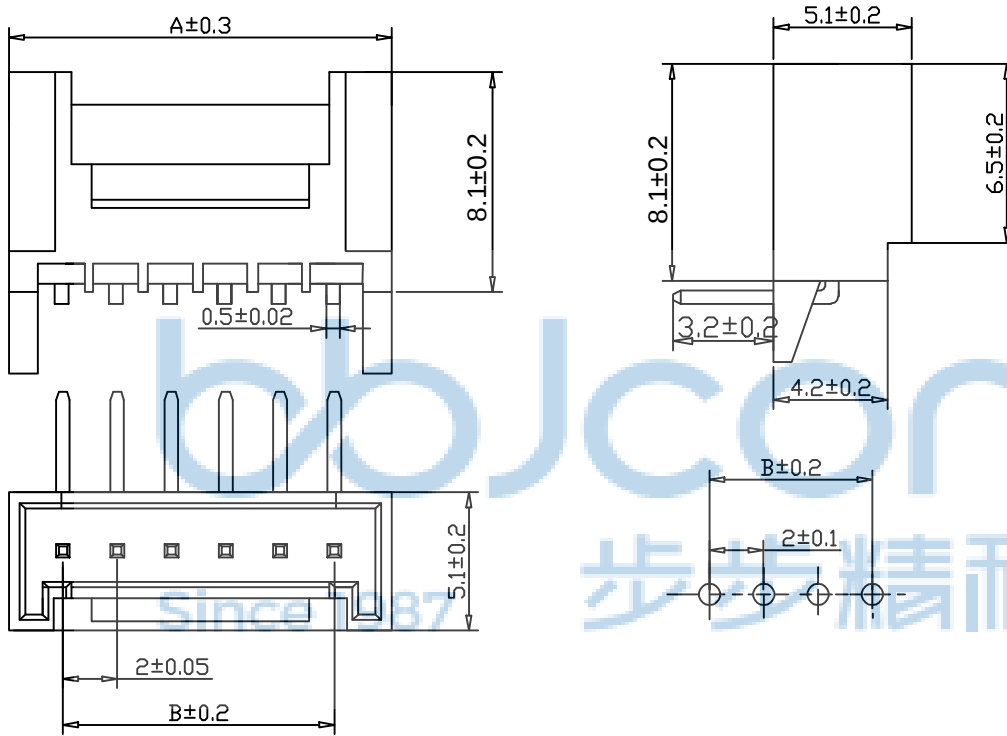

未注公差				
范围	>0-3	>3-18	>18-50	>50-100
公差	± 0.15	± 0.2	± 0.3	± 0.5

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0102-1		DR. SGF		JM_Zheng		LYX		SGF		NAME: HY-6AWD (2.0-6P) 弯针 带扣 带定位 白色		PJ. NO.: WT.01.12-21-1001		SIZE: A4 DRW NO.:		FINISH: SEE NOTES		MAT'L.: SEE NOTES		SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 1/2	
---	--	-----------------	--	---------	--	----------	--	-----	--	-----	--	-------------------------------------	--	---------------------------	--	-------------------	--	-------------------	--	-------------------	--	------------	--	----------	--	----------	--	-----------	--

PE袋规格:***X*** (以实际出货为准)

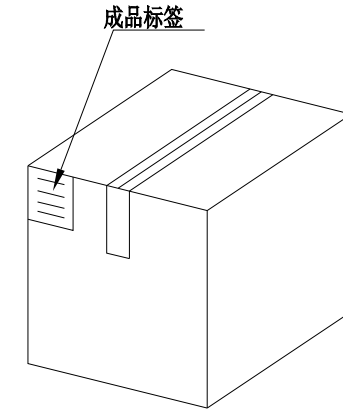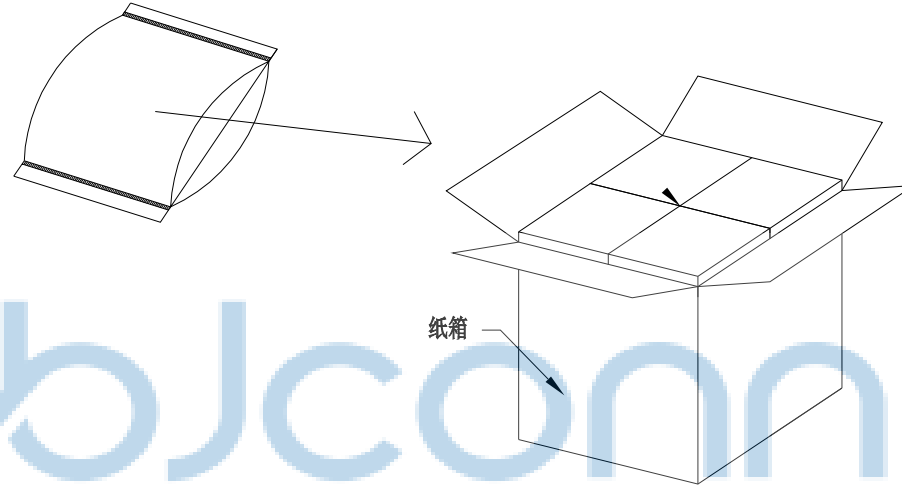

1. 包装要求:

- 1.1 每PE袋包装 2000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计40000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0102-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: HY-6AWD (2.0-6P) 弯针 带扣 带定位 白色	
	APPD.	JM_Zheng			PJ. NO.: WT.01.12-21-1001		
	CHKD.	LYX			SIZE: A4 DRW NO.:		
					FINISH: SEE NOTES		MAT'L.: SEE NOTES
				SCALE: N/A		REV.: A0	UNIT: mm PAGE: 2/2