
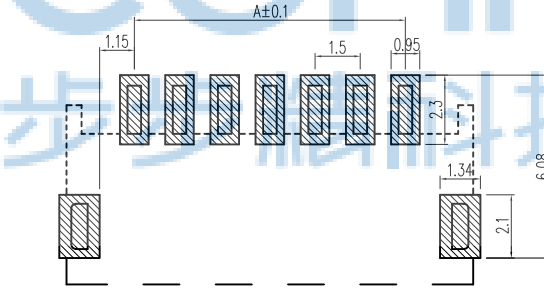
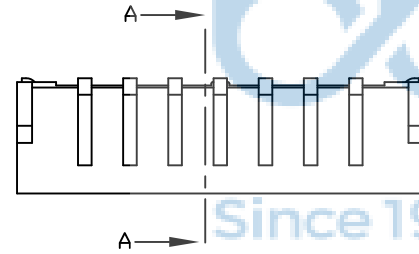
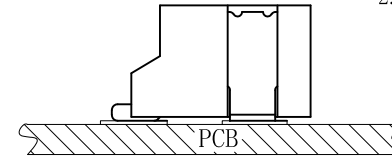





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

1. 技术参数:

- 1.1 额定电流: 1.0A AC/DC
- 1.2 额定电压: 125V
- 1.3 耐 电 压: 500V ACminute
- 1.4 接触电阻: 20mΩ MAX
- 1.5 绝缘电阻: 500MΩ MIN
2. 工作温度: -25℃ ~ +85℃

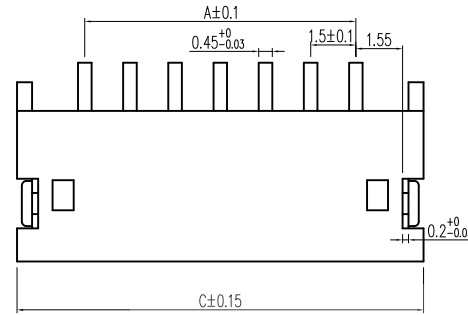


印制线路板

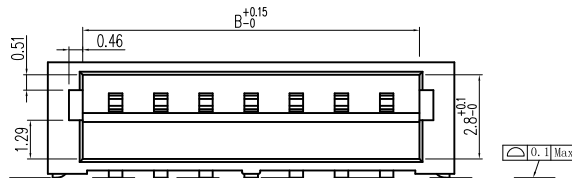

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
1.5WT-2P	1.5	3.66	6.02	1.5WT-12P	16.5	18.66	21.02
1.5WT-3P	3.0	5.16	7.52	1.5WT-13P	18.0	20.16	22.52
1.5WT-4P	4.5	6.66	9.02	1.5WT-14P	19.5	21.66	24.02
1.5WT-5P	6.0	8.16	10.52	1.5WT-15P	21.0	23.16	25.52
1.5WT-6P	7.5	9.66	12.02	1.5WT-16P	22.5	24.66	27.02
1.5WT-7P	9.0	11.16	13.52				
1.5WT-8P	10.5	12.66	15.02				
1.5WT-9P	12.0	14.16	16.52				
1.5WT-10P	13.5	15.66	18.02				
1.5WT-11P	15.0	17.16	19.52				

NO	物料名称	规格型号	数量(PCS)	材质	镀涂	物料编码
①	基座	2.0	1	LCPE130i	本色	
②	焊片	2.0	2	黄铜	锡	
③	插针	2.0	2~20	黄铜	锡	

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: 针座 1.5-5P 卧贴 米黄色			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: WT.05.61-73-H007			
PDWG.NO: 0013-1		DR. SGF		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2			

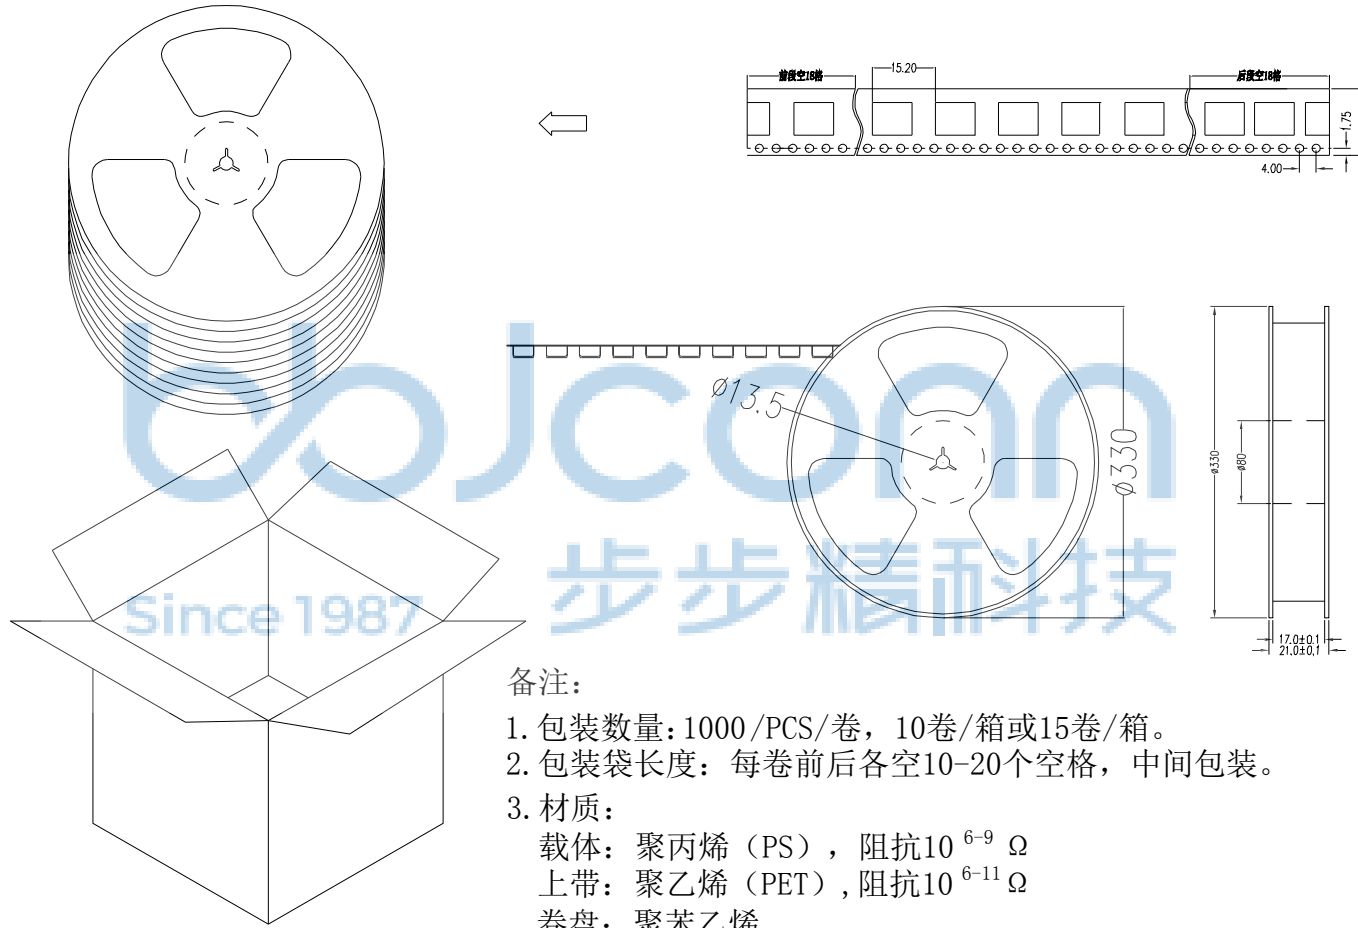

备注:

1. 包装数量: 1000 / PCS / 卷, 10 卷 / 箱或 15 卷 / 箱。
2. 包装袋长度: 每卷前后各空 10-20 个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 针座 1.5-5P 卧贴 米黄色	
APPD. JM_Zheng		PJ. NO.: WT.05.61-73-H007	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0013-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	