

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK

端子: C2680

外壳: SPCC

2. 电镀说明:

端子: 接触区域镀金

焊锡区域镀雾锡 100 u" Min

全部区域镍底 50 u" Min








外壳: 表面镀镍 100 u" Min

3. 电气性能:

绝缘阻抗 (EIA-364-21): 100 MΩ MIN.
AT 500V/DC FOR 1 MINUTE.

接触阻抗 (EIA-364-06) 30 mΩ MAX.


耐电压 (EIA-364-20) NO DISCHARGE,
FLASHOVER OR BREAKDOWN
AT 500 V/AC 1MINUTE.

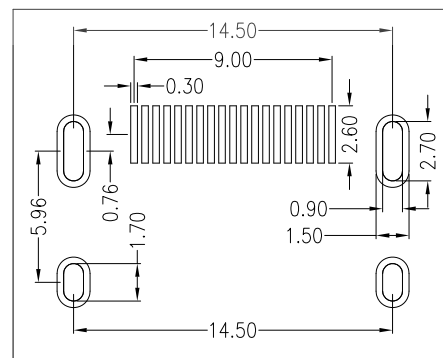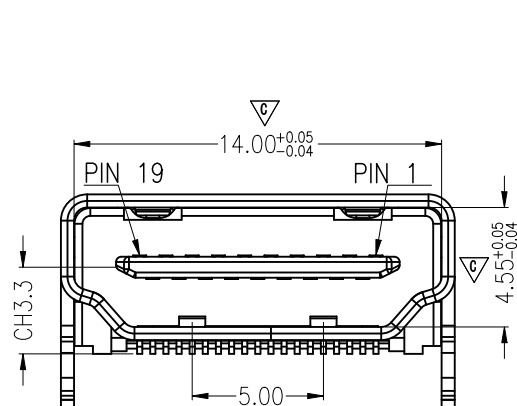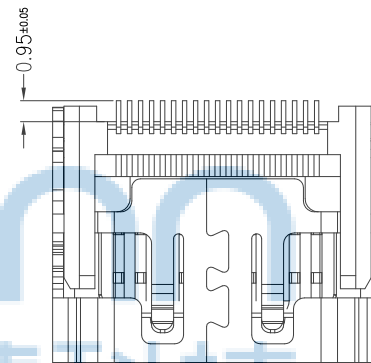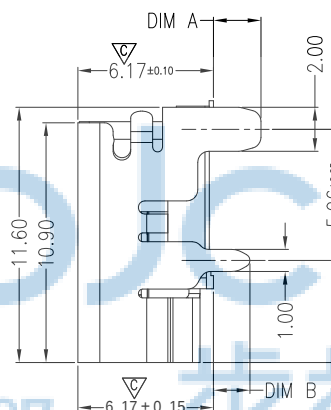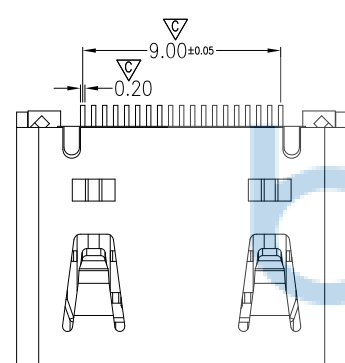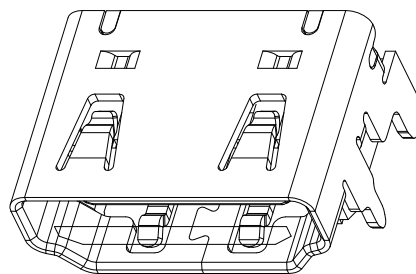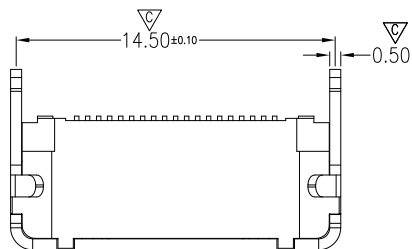

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW (TOLERANCE: +/-0.05)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X''': ±1"		NAME: HDMI A型 母座 铁壳 平口 无凸点 L=11.60	
APPD.	JM_Zheng	PJ. NO.: HD.01.51-11-1002		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0100-2	DR.	SGF	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/3

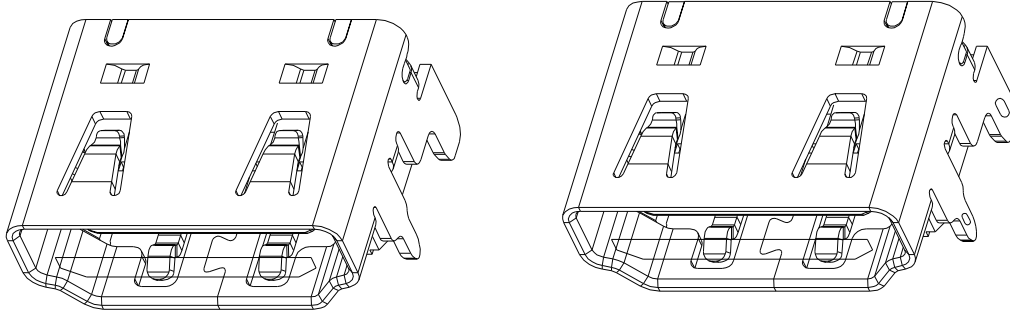

脚无凸点

脚有凸点

4.P/N:

外壳脚规格:



规格	DIM A	DIM B	外壳脚凸点
1	2.16	1.66	无凸点
2	2.16	1.66	带凸点
3	1.50	1.50	无凸点
4	2.20	2.20	无凸点
5	1.50	1.50	带凸点

PIN	Signal Assignment
1	TMDS Data2+
3	TMDS Data2-
5	TMDS Data1 Shield
7	TMDS Data0+
9	TMDS Data0-
11	TMDS Clock Shield
13	CEC
15	SCL
17	DDC/CEC Ground
19	Hot Plug Detect

PIN	Signal Assignment
2	TMDS Data2 Shield
4	TMDS Data1+
6	TMDS Data1-
8	TMDS Data0 Shield
10	TMDS Clock+
12	TMDS Clock-
14	Utility
16	SDA
18	+5V Power




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: HDMI A型 母座 铁壳 平口 无凸点 L=11.60	
APPD. JM_Zheng		PJ. NO.: HD.01.51-11-1002	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0100-2		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3	

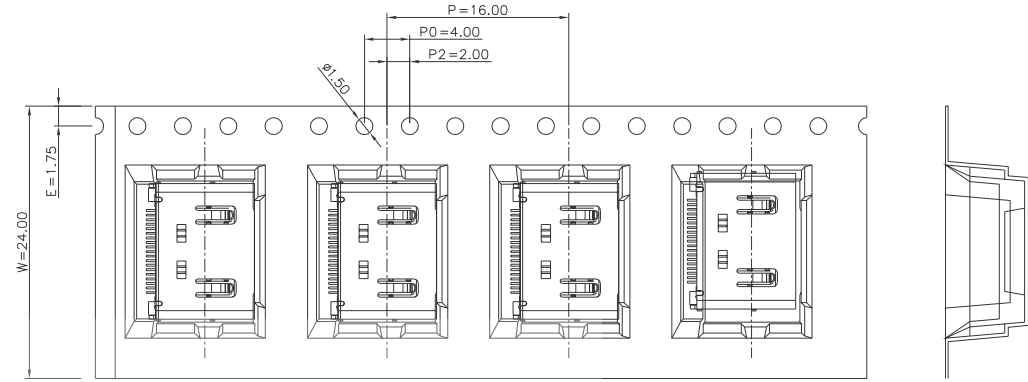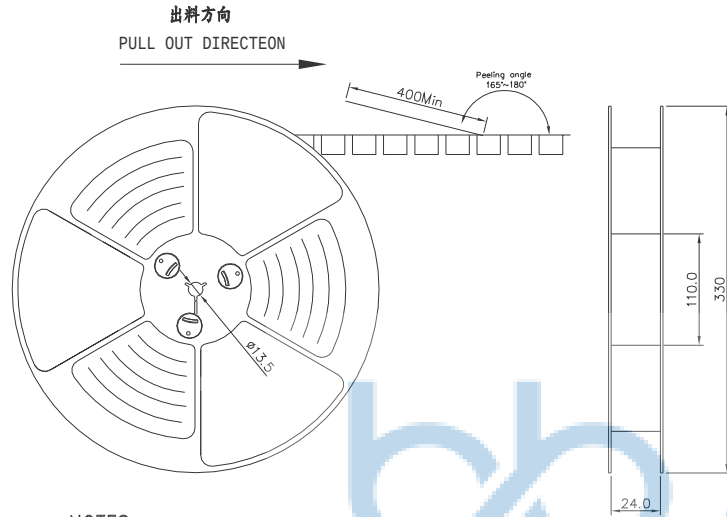

NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

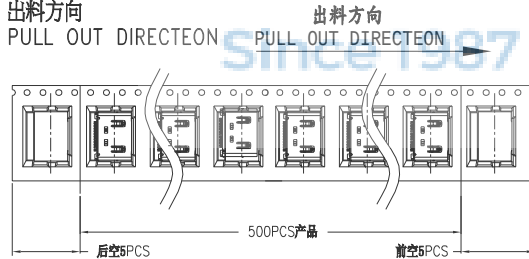

2. 出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

TAPE & REEL 10 PCS
1 REEL
= 500 PCS

BOX
DIMENSIONS:
340X340X290

1 CARTON
=10 REELS
=5000 PCS



包装明细表 (The detail of the packing) Carton

产品料号 (Product No.)	包装容量 (Packing Capacity)		重量 Weight (Kg)			
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
	500	10	5000	----	6.25KG	10.5KG

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: HDMI A型 母座 铁壳 平口 无凸点 L=11.60	
PDWG.NO: 0100-2		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: HD.01.51-11-1002 SIZE: A4 DRW NO.:	
DR. SGF		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 3/3	