

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.



COVER: COPPER ALLOYS OR STEEL.

2.PLATING:

UNDERPLATE: NICKEL.


CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: GOLD OVER NICKEL.

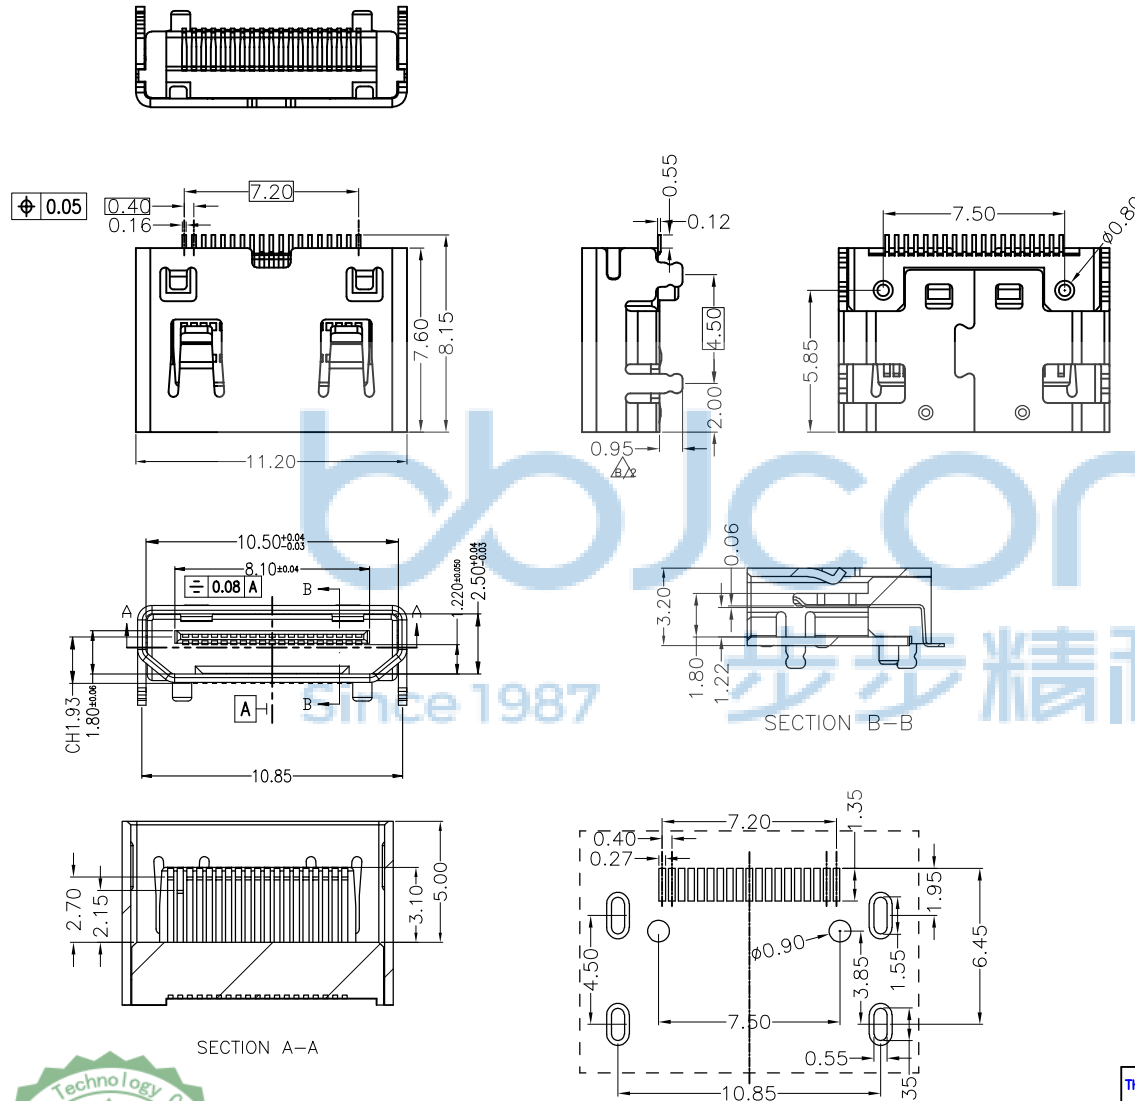


RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程部		NAME: MINI HDMI 母座 四脚插带柱 L=7.6 端子镀金SMT 铜壳镀金	
APPD.	JM_Zheng	PJ. NO.: HD.02.51-25-H001		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0423-2	DR.	SGF	SCALE: N/A	REV.: A0
				UNIT: mm	PAGE: 1/2

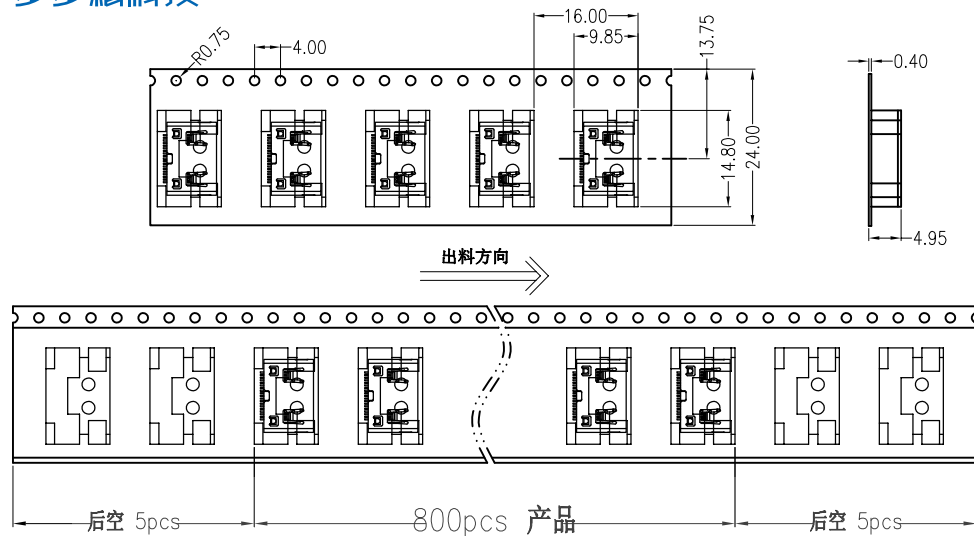

NO.1

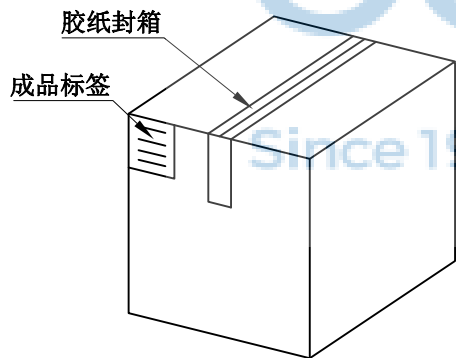


纸箱规格: 330*330*385

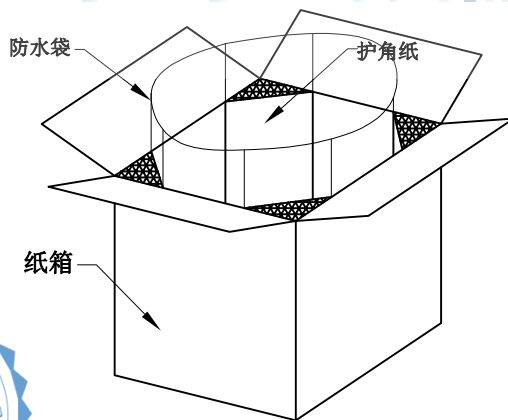

NO.3



NO.4

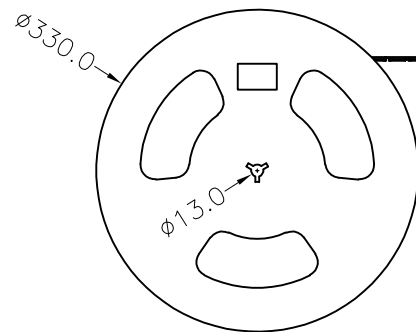

NO.2

1. 材质要求:

- 1.1 纸箱的材质要求为K=K; 外形尺寸为39*39*38.5CM;
- 1.2 卷盘的材质为PS; 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
- 1.3 卷带的材质为PS; 卷带的外形尺寸为12960*24*4.0mm

2. 包装要求:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品800PCS, 再后空5PCS; 上带留200MM 长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的12 盘(共计9.6Kset), 用防水袋包装内附干燥剂, 上下放纸板放入纸箱内, 整箱毛重为4.5KG;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

备注:

1. 若有未装满之零数, 必须用泡棉塞满。
2. 针对于包装方式可根据客户要求包装。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0423-2	DR. SGF	NAME: MINI HDMI 母座 四脚插带柱 L=7.6 端子镀金SMT 铜壳镀金	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: HD.02.51-25-H001	
		SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2