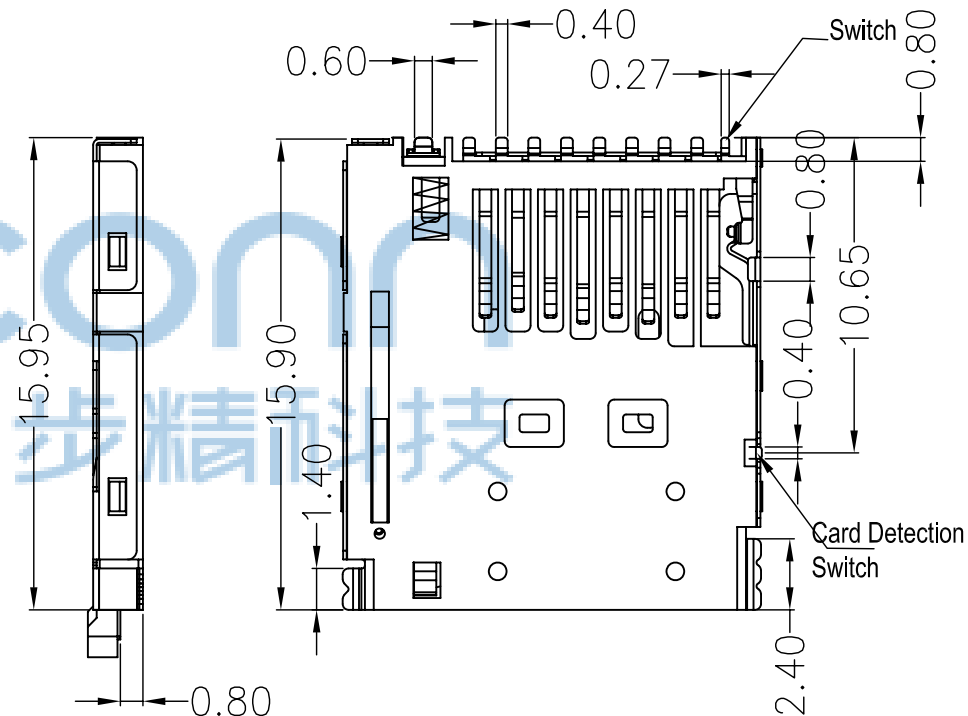
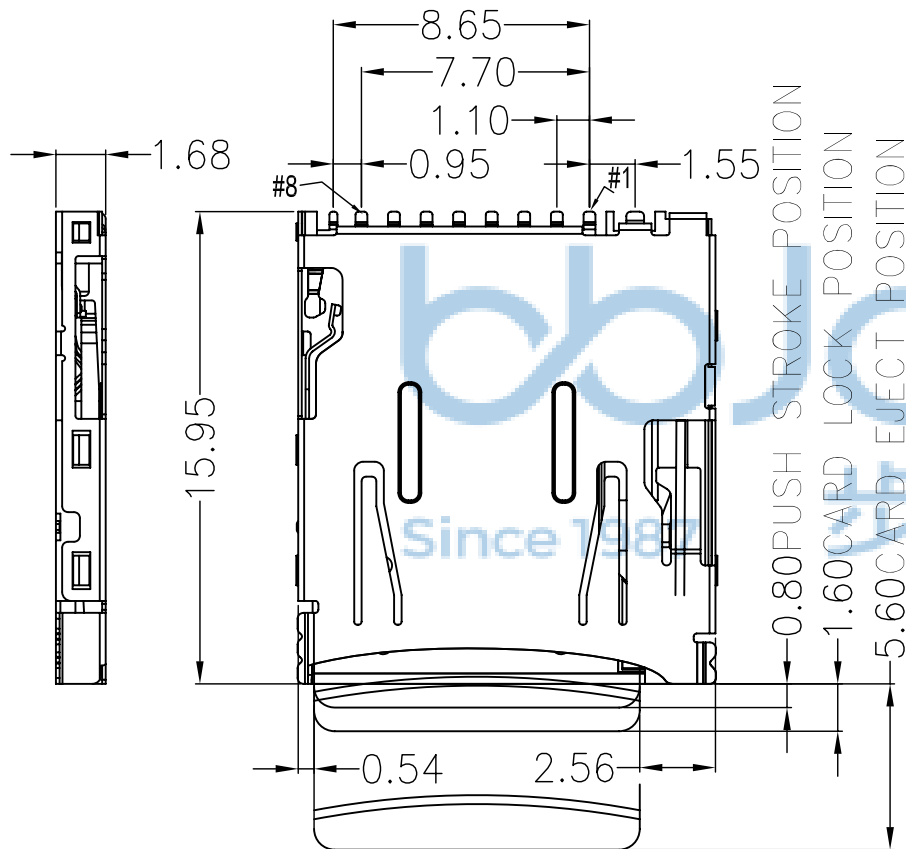
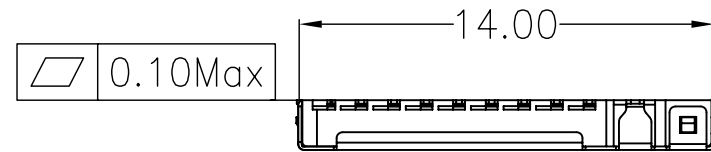


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0214-1

深圳市步步精科技有限公司		NAME: 卡座 TF PUSH 8+2PIN 带检测PIN 带CDPIN L=15.95 H=1.68 贴片 无柱 (101-TF10-168)	
.X: ± 0.38	X': $\pm 3^\circ$	PJ. NO.: 142-111-100001-X8G	
.XX: ± 0.25	X': $\pm 2^\circ$	SIZE: A4 DRW NO.:	
.XXX: ± 0.13	.XX': $\pm 1^\circ$	FINISH: SEE NOTES MAT'L.: SEE NOTES	
APPD. JM_Zheng	CHKD. LYX	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3	
DR. TSP			

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy

Shell: sus

PLATING:

Contact: Plated 50u'' Ni All, Over all Au 1u

Shell: Plated 50u'' Ni Overall

Plated 1u''Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.

Voltage Rating :125V AC/DC

Ambient Temperature Range :-25° C~+85° C

Storage Temperature Range :-25° C~+85° C


Ambient Humidity Range :95% R.H. Max.

Contact Resistance:100m max.



Insulation Resistance:1000M min./500VDC

Mating Cycles:5,000 Insertions

产品耐温温度: 260° C

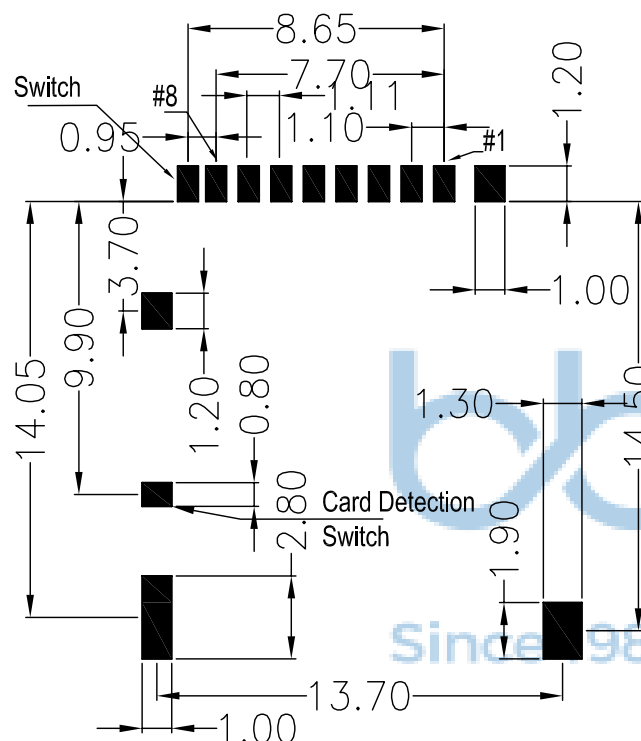

PCB AREA
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

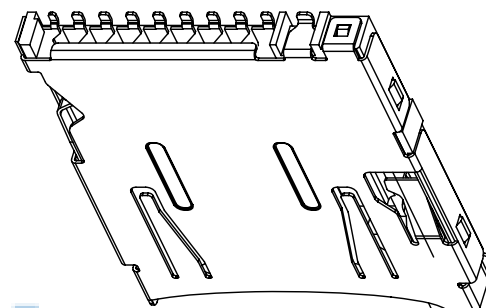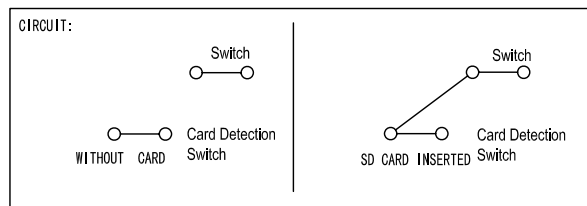

PIN NO.	PIN ASSIGNMENT
1#	DAT2 信号
2#	CD/DAT3 信号
3#	CMD 数据输入
4#	VDD 电压/电源
5#	CLK 时钟
6#	VSS 接地
7#	DAT0 信号
8#	DAT1 信号

THIS DOCUMENT IS THE
SOLE PROPERTY OF

BBJconn Technology Co., Ltd.
Corporation AND SHOULD

NOT BE USED IN WHOLE

OR IN PART WITHOUT

PRIOR WRITTEN PERMISSION.

PDWG.NO: 0214-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD. JM_Zheng

CHKD. LYX

DR. TSP





NAME: 卡座 TF PUSH 8+2PIN 带检测PIN 带CDPIN
L=15.95 H=1.68 贴片 无柱 (101-TF10-168)

PJ. NO.: 142-111-100001-X8G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3

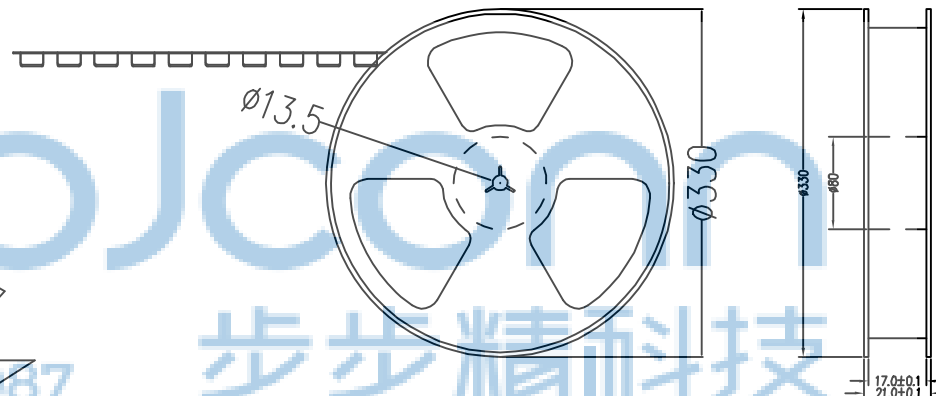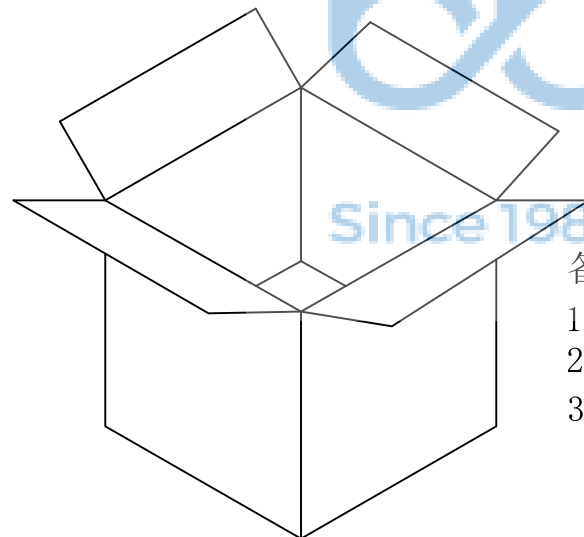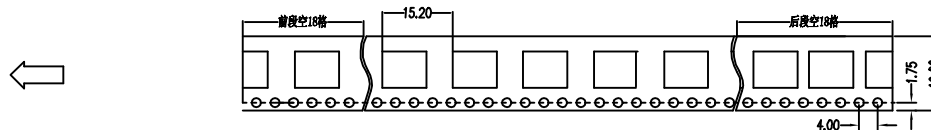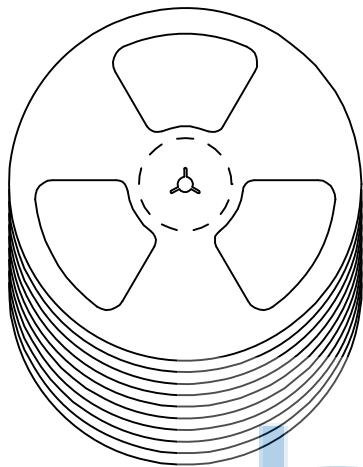

备注:

- 包装数量: 1000/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 卡座 TF PUSH 8+2PIN 带检测PIN 带CDPIN L=15.95 H=1.68 贴片 无柱 (101-TF10-168)	
APPD. JM_Zheng		PJ. NO.: 142-111-100001-X8G	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0214-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3	