

备注:

1. 电气特性:

- 1-1. 接触额定电流: 1A
- 1-2. 接触电阻: 100毫欧最大(插拔前后)
- 1-3. 耐电压: 500V AC/1分钟.
- 1-4. 绝缘电阻: 1000兆欧最小, 测试后1000兆欧最小

2. 机械特性:

- 插入力: 初始 10N MAX ;
- 拔出力: 初始 10NMAX.


3. 寿命插拔: 5000次

4. 共面度0.10mm Max (IR后)

5. 满足回流焊的无铅工艺

6. 产品必需符合RoHS要求




7. ▼符号为重点尺寸.

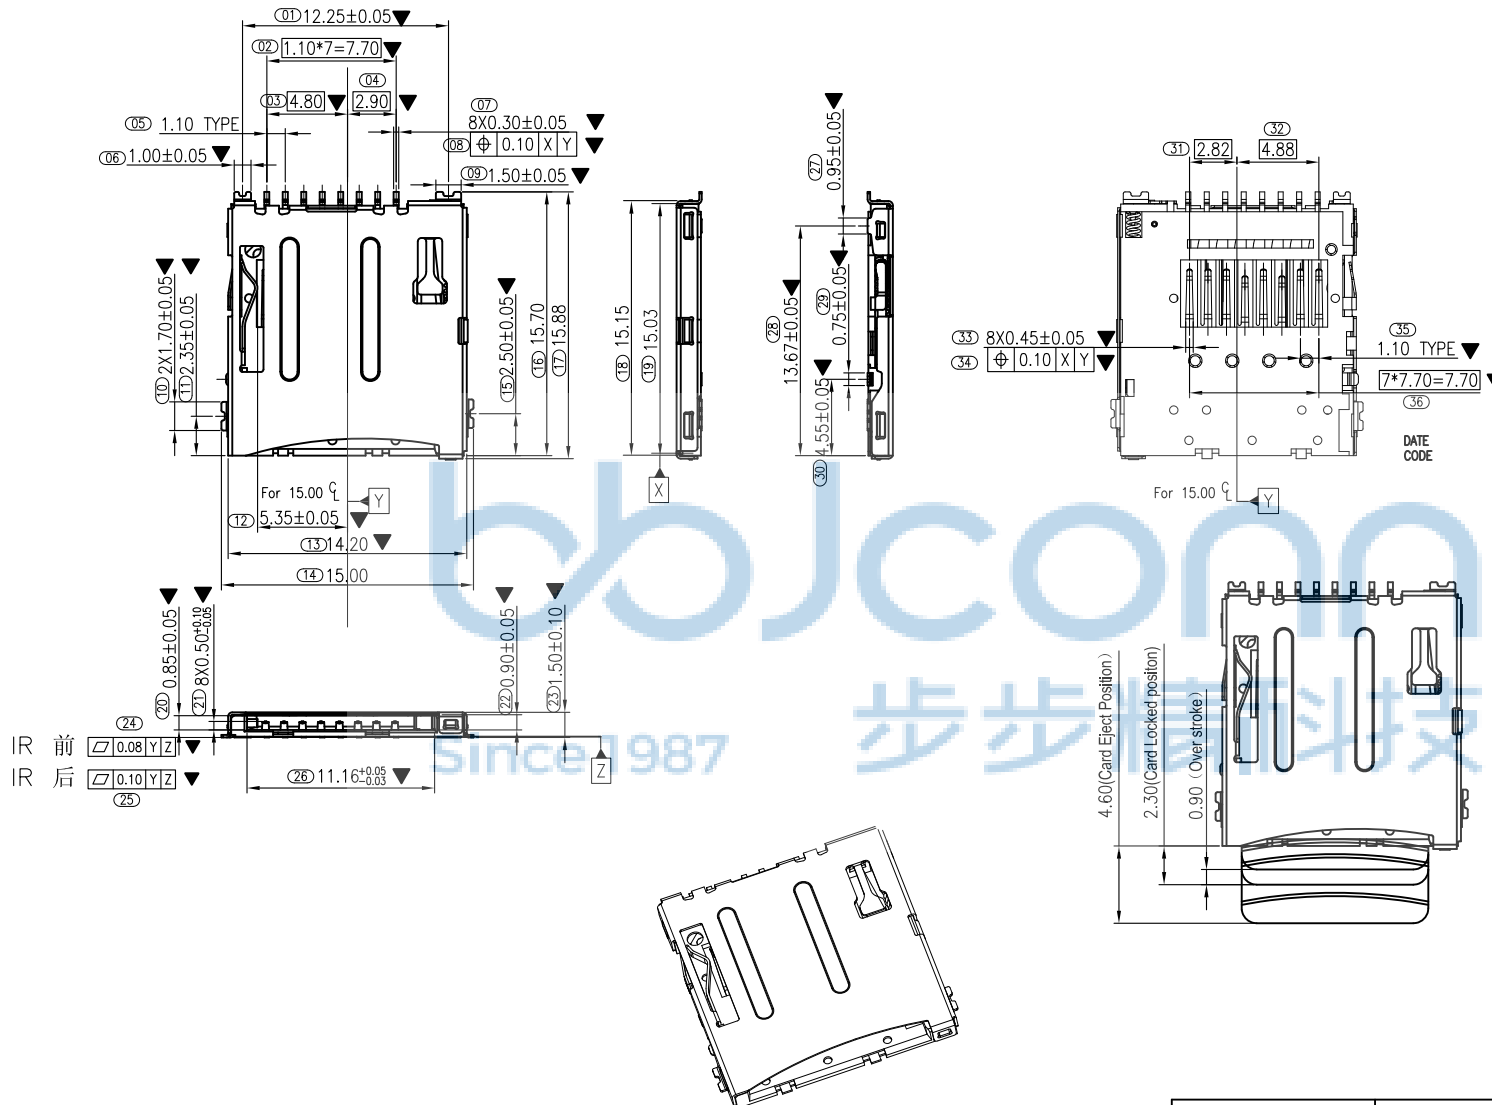


6	滑块	UL94V-0 颜色: 黑色	1PC
5	弹簧	焊锡30u"min	1PC
4	挂钩	焊锡30u"min	1PC
3	端子	C5210-EL, 接触区镀金2u"min;焊接区镀锡80u"min, 全区镀底80~130u"	1PC
2	铁壳	SUS301-H, 接触区镀金2u", 焊接区镀金G/F, 全区镀底30u"min	1PC
1	MD胶芯	LCP UL94V-0 颜色: 黑色	1PC
NO	品名	规格	数量

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		深圳市步步精科技有限公司	
NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	PDWG.NO: 0302-1	DR. SGF	NAME: Micro SD push normal type connector H=1.50
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES	PJ. NO.: CD.03.02-13-0002
		SCALE: N/A	SIZE: A4
		REV.: A0	DRW NO.:
		UNIT: mm	MAT'L.: SEE NOTES
		PAGE: 1/3	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

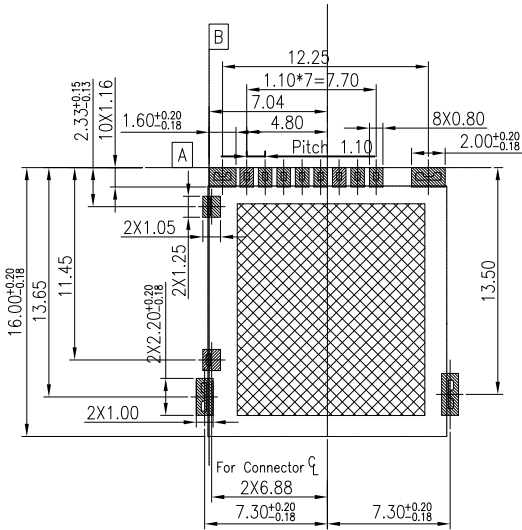

PCB PATTERN LAYOUT
(GENERAL TOLERANCE:±0.05)

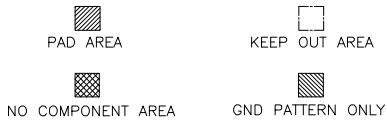

OPENING/CLOSE OF SWITCH

	CARD DETECT SWITCH
CARD UNINSERTION	OPEN
CARD HALF INERTION	OPEN
CARD INSERTION	CLOSE
N/O	OPEN: P9, P10 CLOSE: P9, P1


P 6	Micro-SD_VSS		
P 5	Micro-SD_CLK	P 11	Cover_GND
P 4	Micro-SD_VDD	P 10	Micro-SD_GND
P 3	Micro-SD_CMD	P 9	Micro-SD_CD
P 2	Micro-SD_CD/DATA3	P 8	Micro-SD_DAT1
P 1	Micro-SD_DATA2	P 7	Micro-SD_DAT0

Pin Define

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				NAME: Micro SD push normal type connector H=1.50			
PDWG.NO: 0302-1		DR. SGF		P.J. NO.: CD.03.02-13-0002		SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A		REV.: A0	
				UNIT: mm		PAGE: 2/3	



1. 每卷包装数量:1500PCS/每卷
2. 卷带包装方式:

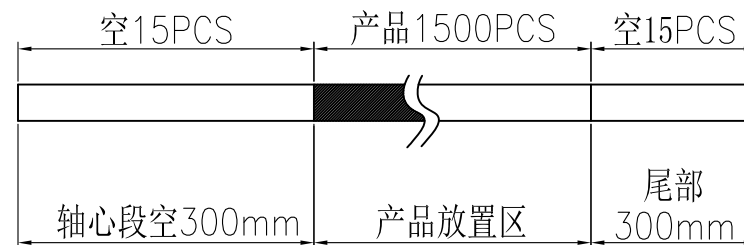

- 3.每箱包装数量:18000PCS/箱

PE袋, T=0.08mm, 730*760mm, 开口处730mm	1PC
载带, 材质PS, 透明, T=0.30, 宽24, PITCH 20	30.60M*12
护角, K=K, T=7.0mm, 95*95*290mm	4PC
珍珠棉340mm*340mm*18mm	2PC
自粘带, 宽21.5MM 用于宽24MM卷带, 200M/R	30.60M*12
卷盘, 蓝色, 13英寸*24CM(直径330)	12PC
纸箱, K=K, T=7.0mm, 350*350*340mm	1PC
品名规格	数量

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0302-1			\$! c 2!•!•2î0 ° 9L€ œ (				
	.X: ±0.38 X*: ±3* .XX: ±0.25 X*: ±2* .XXX: ±0.13 XX*: ±1*		NAME: Micro SD push normal type connector H=1.50				
	APPD.	JM_Zheng		PJ. NO.: CD.03.02-13-0002			
	CHKD.	LYX		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 3/3