

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

Technical requirements:

1. Rating :

CQC: 6(4) A 125/250V~
VDE,ENEC: 6(4) A 250V~
UL , cUL : 10(6) A 125/250V~
1/2HP 125/250V~

2. Operating force: 700±500gf

3. Contact resistance: ≤50mΩ

4. Electrical life: ≥10000 cycles

5. Withstand Voltage :Between all terminals: 1500VAC (50-60Hz) 5s Terminals to Button: 3000V AC (50-60Hz) 5s Leakage Current : 5mA

6. Insulation Resistance : ≥100MΩ 500V DC

7. Environmental temperature: : -25~+125℃







PANEL THICKNESS	DIM.X	DIM.Y
0.75~1.25	19.0~19.2	13.0
1.25~2.0	19.3~19.5	13.0
2.0~3.0	19.6~19.8	13.0




Certificate	No:
CQC	CQC15001131387
VDE,ENEC	40043123
UL , cUL	E473864

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0004-1


深圳市步步精科技有限公司		NAME: 船型开关 HS8-F6-6-06H400-BB03 六脚插	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" X*: ±2" XX*: ±1"	PJ. NO.: RS.01.11-22-2003	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

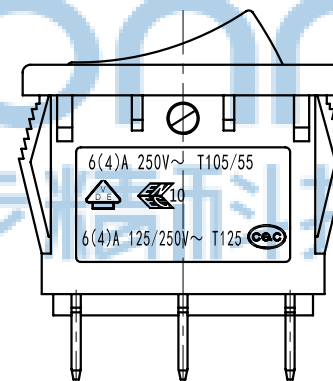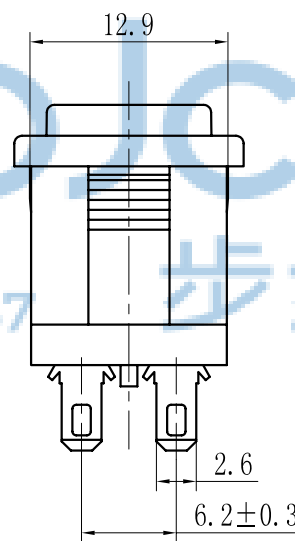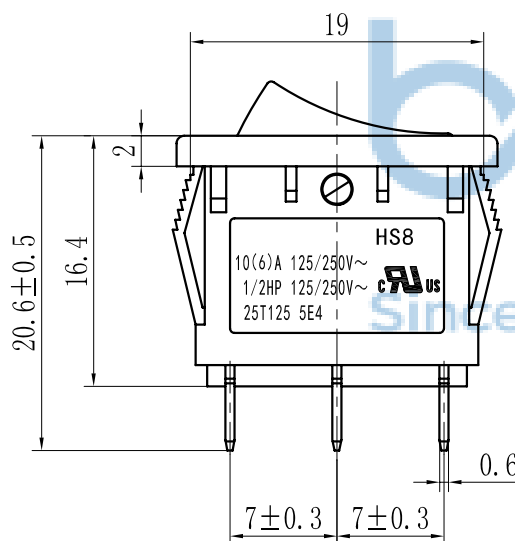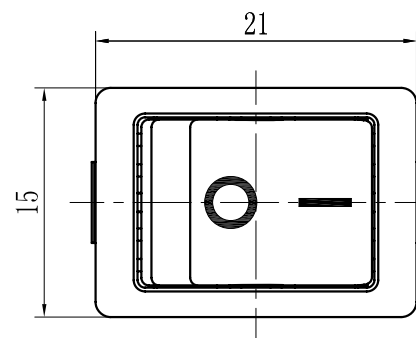

PE袋规格: 260*185

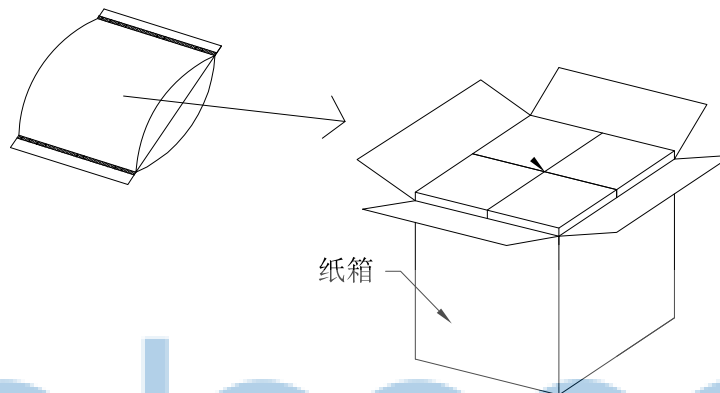

成品标签



1. 包装要求:

- 1.1 每PE袋包装 300 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计6000 PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	X*: ±3*	NAME: 船型开关 HS8-F6-6-06H400-BB03 六脚插	
.XX: ±0.25	.X*: ±2*	P.J. NO.: RS.01.11-22-2003	
.XXX: ±0.13	.XX*: ±1*	SIZE: A4 DRW NO.:	
APPD. JM_Zheng		FINISH: SEE NOTES MAT'L: SEE NOTES	
CHKD. LYX		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
PDWG.NO: 0004-1	DR. TSP		