


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				






Technical requirements:

- Rating :
CQC : 16(6) A 125/250V~
VDE,ENEC,KC: 16(6) A 250V~
UL , cUL : 20(8) A 125/250V~
1HP 250V~
3/4HP 125V~
- Operating force: 650±350gf
- Contact resistance: ≤50mΩ
- Electrical life: ≥10000 cycles
- Withstand Voltage :Between all terminals:
1500VAC (50-60Hz)1min
Terminals to Button:
3000V AC (50-60Hz)1min
Leakage Current : 20mA
- Insulation Resistance : ≥100MΩ 500V DC
- Environmental temperature: : -25~+125℃

PANEL CUT-OUT



SWITCHING CIRCUIT

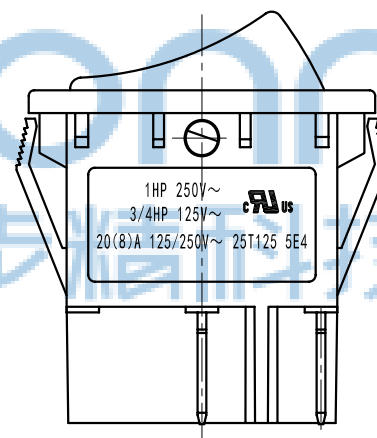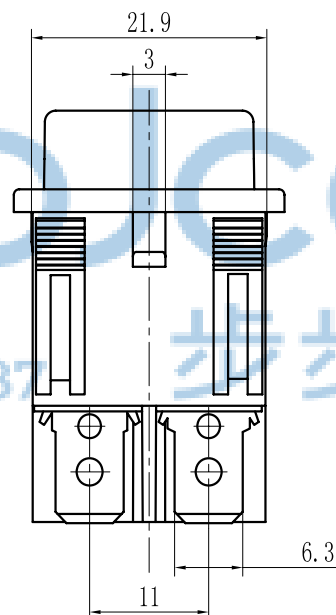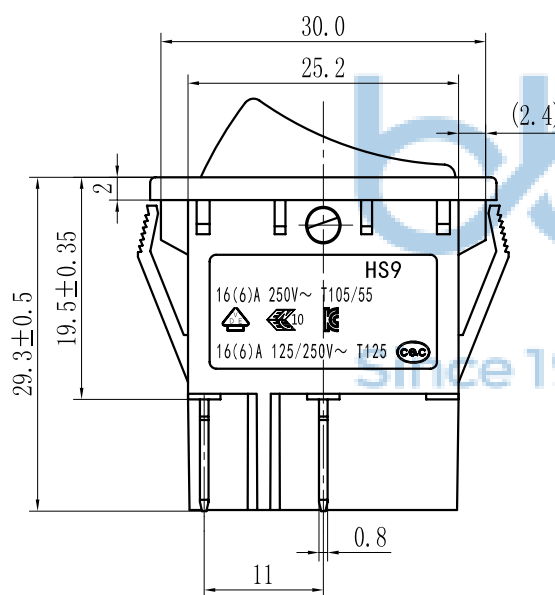
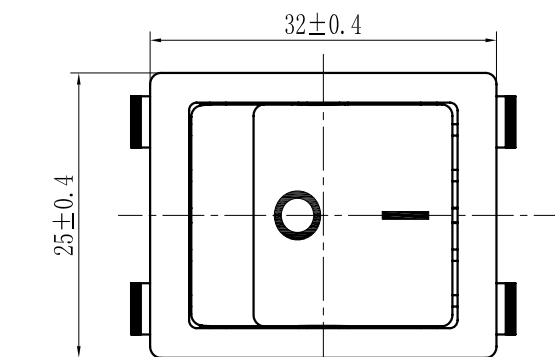



PANEL THICKNESS	DIM.X	DIM.Y
0.75~1.25	30.0~30.1	22.0
1.25~2.0	30.2~30.4	22.0
2.0~3.0	30.5~30.7	22.0

Certificate	No:
CQC	CQC15001131571
VDE	40042867
KC	SU02089-15001
UL , cUL	E473864

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0004-1

深圳市步步精科技有限公司		NAME: 船型开关 HS9-A3-04Q200-BB03 四脚插	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" X': ±2" XX': ±1"	PJ. NO.: RS.17.11-22-2001	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

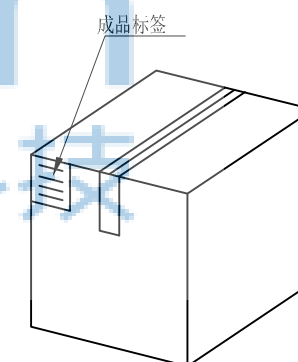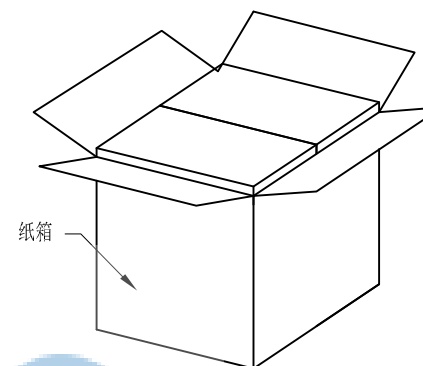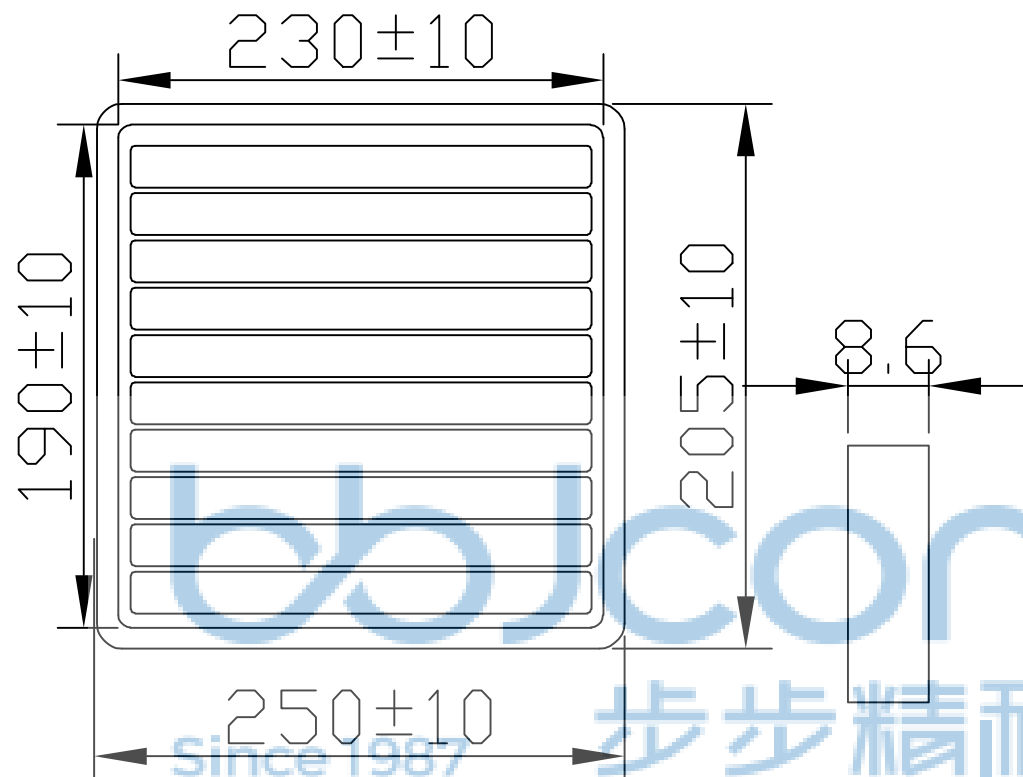

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装50PCS ;
- 1.2 每20盘放一箱, 共计1000PCS;
- 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	X': ±3'	NAME: 船型开关 HS9-A3-04Q200-BB03 四脚插	
.XX: ±0.25	.X': ±2'		
.XXX: ±0.13	.XX': ±1'	PJ. NO.: RS.17.11-22-2001	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0004-1	DR. TSP	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2