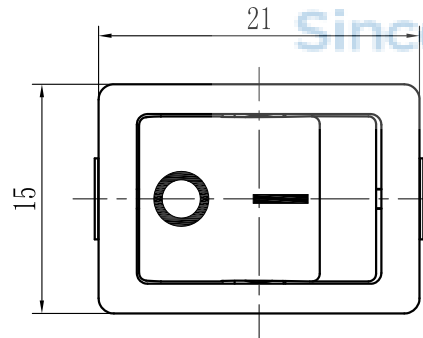
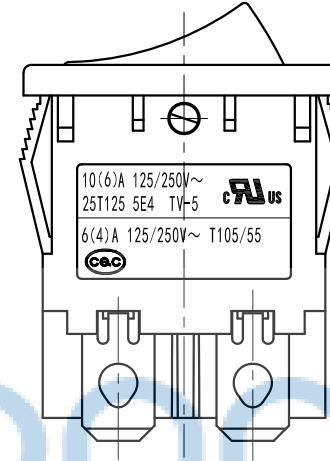
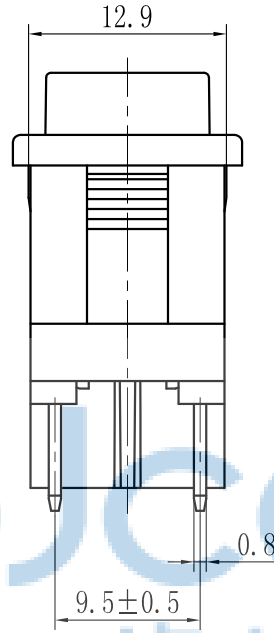
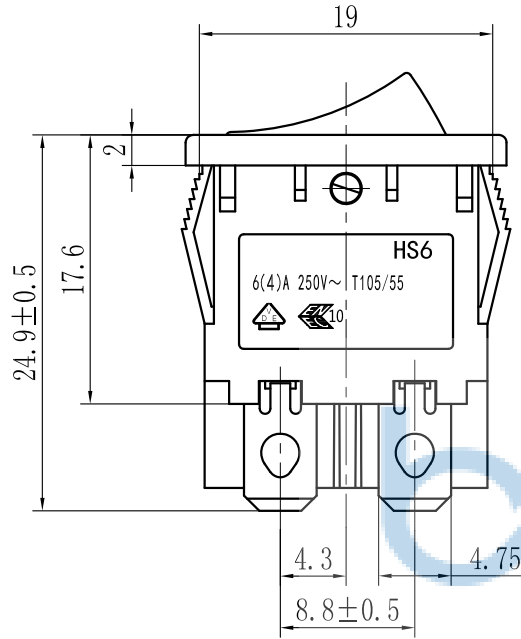


Technical requirements:

1. Rating :

CQC : 6 (4)A 125/250V~
VDE, ENEC : 6 (4)A 250V~
UL , cUL : 10(6) A 125/250V~
TV-5

2. Operating force: 800±400gf

3. Contact resistance: ≤50mΩ

4. Electrical life: ≥10000 cycles

5. Withstand Voltage :Between all terminals:
1500VAC (50-60Hz)1min
Terminals to Button:
3000V AC (50-60Hz)1min
Leakage Current : 20mA

6. Insulation Resistance : ≥100MΩ 500V DC



7. Environmental temperature: : -25~+125℃



PANEL THICKNESS	DIM.X	DIM.Y
0.75~1.25	19.0~19.2	13.0
1.25~2.0	19.3~19.5	13.0
2.0~3.0	19.6~19.8	13.0

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PJ. NO.: RS.17.12-22-2001	NAME: 船型开关 HS6-F5-6-04Q1B4-BR03(R3) 四脚直插 红色 带灯	APPD. JM_Zheng	DR. SGF
SIZE: A4	DRW NO.:	CHKD. LYX	PDWG.NO: 0004-1
FINISH: SEE NOTES	MAT'L.: SEE NOTES	SCALE: N/A	REV.: A0
UNIT: mm	PAGE: 1/2		

PE袋规格:***x*** (以实际出货为准)

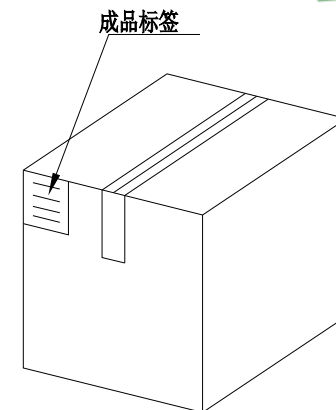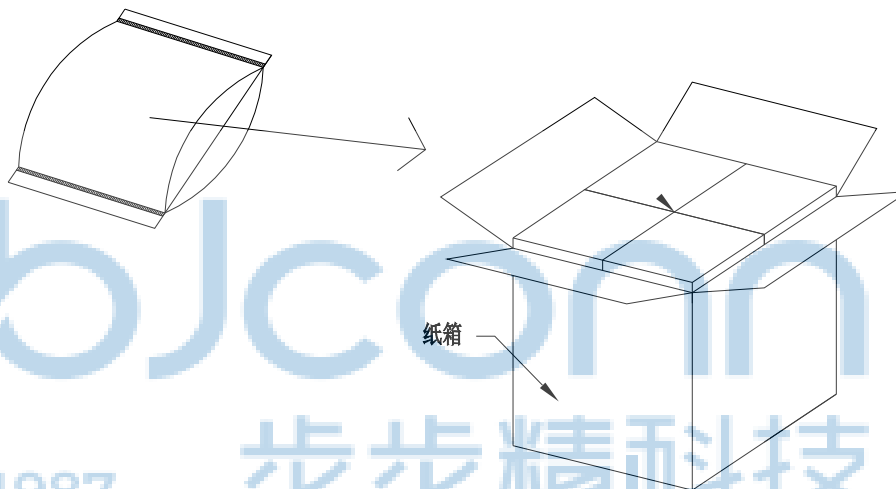

1. 包装要求:

- 1.1 每PE袋包装300 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计6000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	NAME: 船型开关 HSG-F5-6-04Q1B4-BR03(R3) 四脚直插 红色 带灯	
CHKD.	LYX	PJ. NO.: RS.17.12-22-2001	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0004-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	