


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF



- NOTES:
- Rating:
 - KC 16(4)A 250VAC T85/55
 - VDE ENEC 16(4)A 250VAC T85/55
 - CQC 16(4)A 250VAC T105/55
 - UL cUL 16GPA 125VAC
 - 16GPA 250VAC T105/55
 - Circuit Diagram: 4P ON-OFF
 - Terminal Strength: ≥80N
 - Electrical life: ≥10000 cycles
 - Withstand Voltage: Withstand Voltage: 1500VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA
 - Current resistance: ≤50mΩ (initial)
 - Insulation resistance: ≥100MΩ 500V DC
 - Body Materil: NYLON 66 94V-0~2

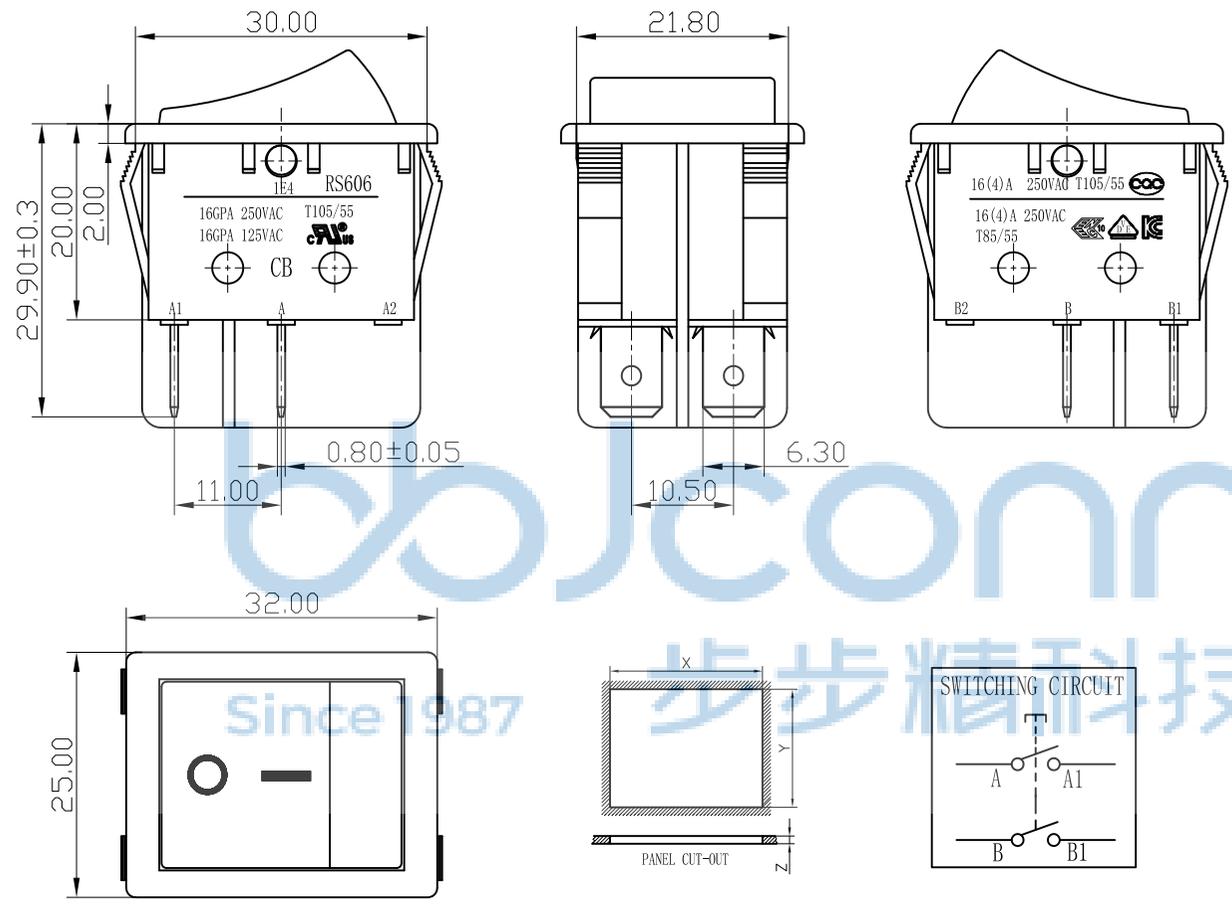

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	22.10~22.20	30.1~30.2
1.25~2.00	22.10~22.20	30.3~30.4
2.00~3.00	22.10~22.20	30.4~30.5

7	基座	1	环保阻燃PA66		
6	弯端	2	0.8mm黄铜带+复合银触点	镀锡	
5	中端	2	0.8mm黄铜带	镀锡	
4	接触桥	2	0.8mm黄铜带+复合银触点	镀银	
3	套管	2	0.3mm拉伸钢	镀镍	
2	弹簧	2	∅0.45弹簧钢丝	发黑	
1	按钮	1	环保阻燃PC		
序号	名称	数量	材料	处理	备注



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0040-1

DR. SGF

APPD. JM_Zheng

CHKD. LYX

NAME: 深圳市步步精科技有限公司
船型开关 RS606B-2010012CBB 银点 黑色基座

PJ. NO.: RS.14.11-22-3001


SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES


SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PE袋规格: 260*185

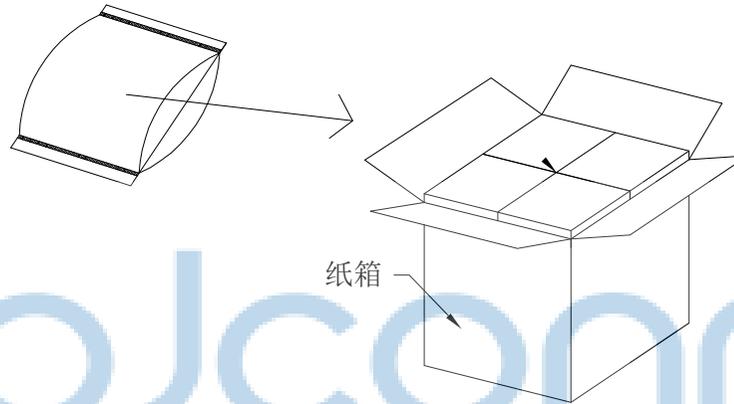

成品标签



1. 包装要求:

- 1.1 每个PE袋包装50pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计1000pcs;
- 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
PDWG.NO: 0040-1		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'
APPD.	JM_Zheng	NAME: 船型开关 RS606B-2010012CBB 银点 黑色基座	
CHKD.	LYX	PJ. NO.: RS.14.11-22-3001	
DR.	SGF	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	