

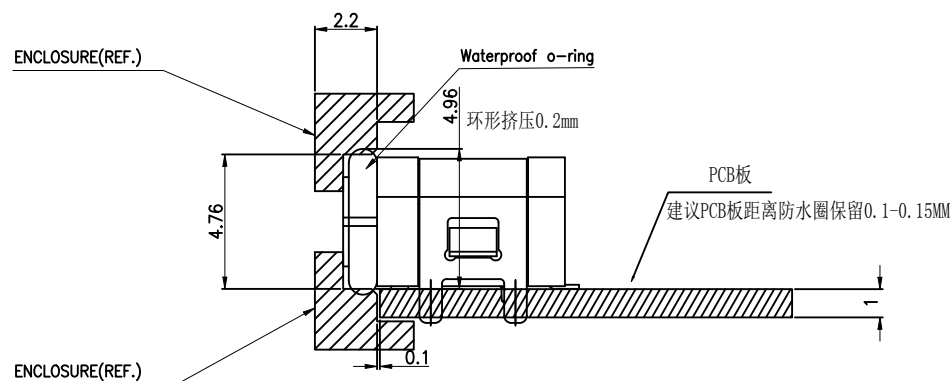
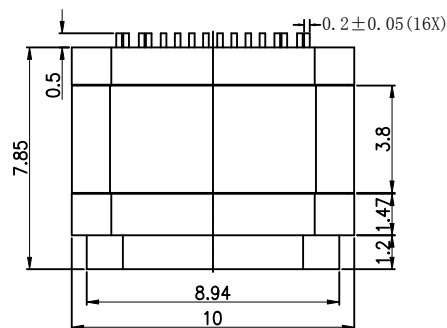
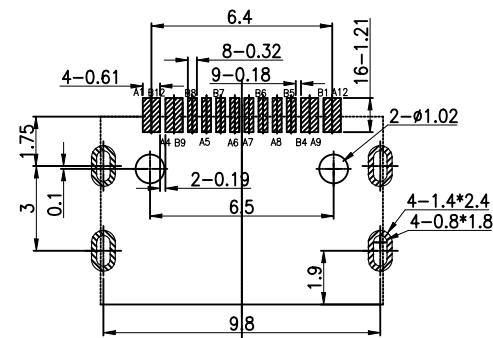
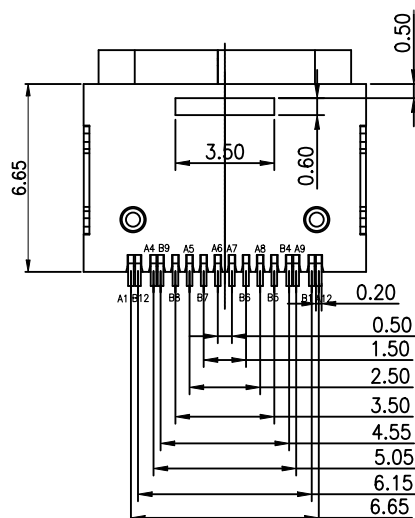


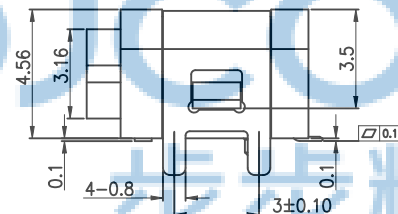

RECOMMENDED SCHEMATIC DRAWING OF CONNECTOR MATCH CHASSIS

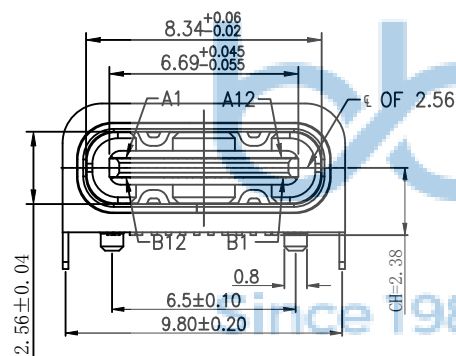


RECOMMENDED PCB LAYOUT
Tolerance: $\pm 0.05\text{mm}$

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 30 VAC
3. TEMPERATURE RANGE: -30 ° C ~ 85 ° C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 6N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8(1.5M 30min).
(防水等级 IPX8 1.5米深 30分钟)



USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B1	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

				A12	GND	D1	GND
6	Run-RING	1PCS	Silica gel	BLACK			
5	SHELL	1PCS	STAINLESS STEEL	NI Plated: 60u"MIN			
4	SHIELDING PLATE	1PCS	STAINLESS STEEL	NI Plated: 60u"MIN			
3	CONTACT	1SET	C7025	Contact Plating: Au (1u"-3u") Soldering Plating: Au 1u"			
2	SHELL HOUSING	1PCS	PA46	BLACK			
1	HOUSING	1PCS	LCP	BLACK			
NO	DESCRIPTION	QTY	MATERIAL	REMARKS			

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME: TYPE-C 16P 防水母座 90度 板上四脚插 带柱
L=7.85 CH=2.38 端子SMT IPX8 O型防水圈

APPD.	JM_Zhenc
-------	----------



	PJ. NO.: UC.01.51-1W-0015
---	---------------------------

CHKD. LYX


SIZE: A4		DRW NO.:	
FINISH: SEE NOTES		MATH: SEE NOTES	

DR.

SCALE: N/A	REV: A0	UNIT: mm	PAGE: 1 / 2
------------	---------	----------	-------------

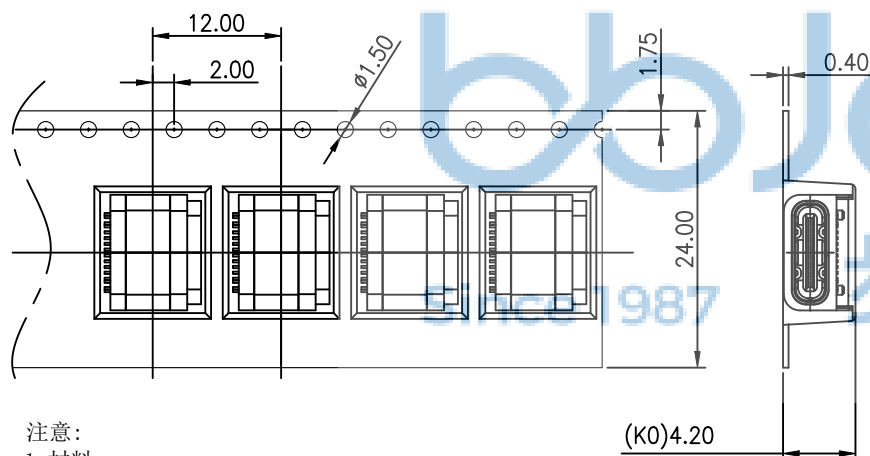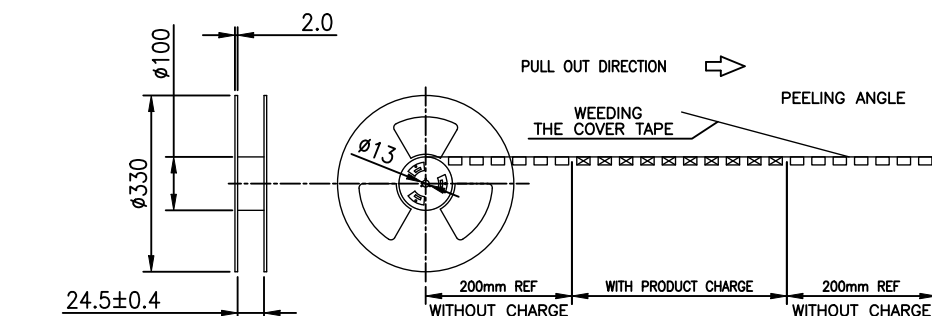


- 注意:
1. 材料:
纸箱:纤维板, 瓦楞, 双层壁。
胶带:聚苯乙烯, 耐热温度:120℃, 白。
卷筒:聚苯乙烯, 耐热温度:70℃, 蓝色。
包装:聚乙烯, 耐热温度:100℃。
 2. 剥离强度:0.1 ~ 1.3 N(10 ~ 130克)
 3. 脱皮速度:300mm /min。
 4. 每个袋子都应包括干燥剂*1。
 5. 外箱上贴号物料标签及RoHS标签
 6. 同一产品只能装同一纸箱, 不允其它产品;
 7. 包装后, 产品铆合面朝内;
 8. 600 PCS/盘 6600PCS/箱



NOTE:

1. QUANTITY: 600 PCS/REEL, 6600PCS/CARTON.

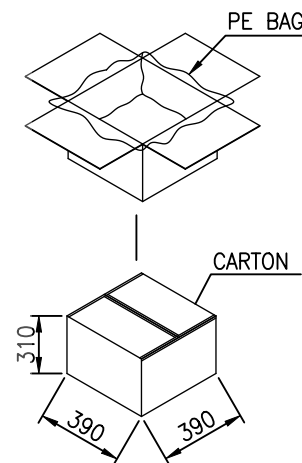

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: TYPE-C 16P 防水母座 90度 板上四脚插 带柱 L=7.85 CH=2.38 端子SMT IPX8 O型防水圈	
APPD.	JM_Zheng	PJ. NO.: UC.01.51-1W-0015	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG,NO: 0541-1		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2