
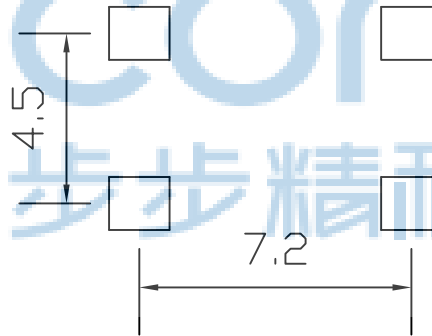
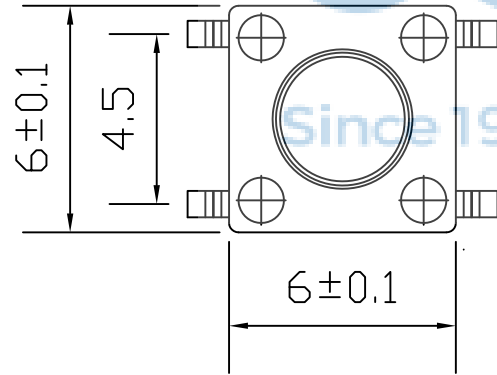
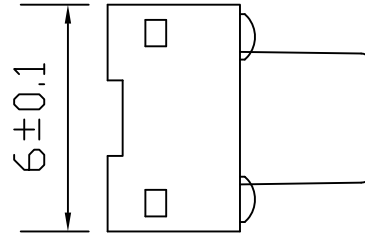



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

主要技术参数	1	操作行程	0.25±0.1mm
	2	额定电压、电流	DC12V/50mA
	3	接触电阻	50mΩ(max)
	4	绝缘电阻	100MΩ(min)
	5	耐 压	250V AC/1min
	6	动 作 力	100/160/260 ± 30GF
	7	使用寿命	80000次
	8	尺 寸	未注公差均按 GB/T1804—2000

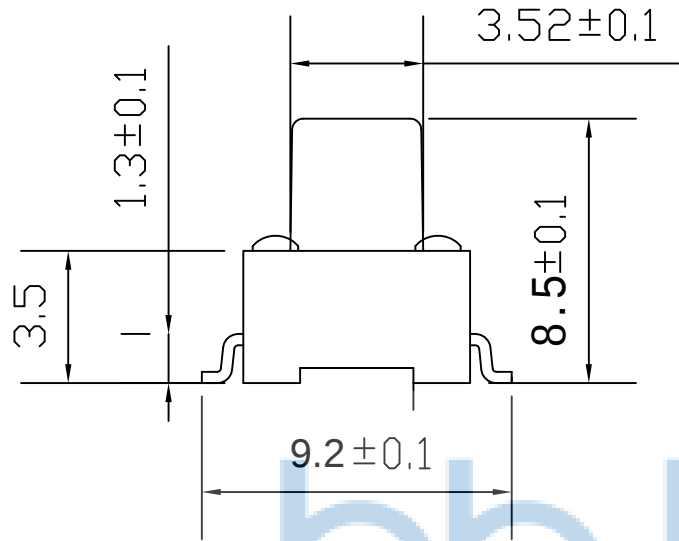


安装尺寸

4	弹 片	1	不锈钢	镀银/白色
3	按 子	1	PPA	黑色
2	盖 板	1	铁皮	镀银/白色
1	底 座	1	黄铜与PPA	黑色与镀银
序号	名 称	数量	材料	镀涂/颜色



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: 轻触开关 6x6x8.5 贴片 不锈钢弹片 260G 9.2脚			
APPD.	JM_Zheng		PJ. NO.: TS.01.20-11-31-03		SIZE: A4 DRW NO.:		
CHKD.	LYX		FINISH: SEE NOTES		MAT'L.: SEE NOTES		
PDWG.NO:	0013-1		DR.	SGF		SCALE: N/A	PAGE: 1/2
				REV.: A0	UNIT: mm		

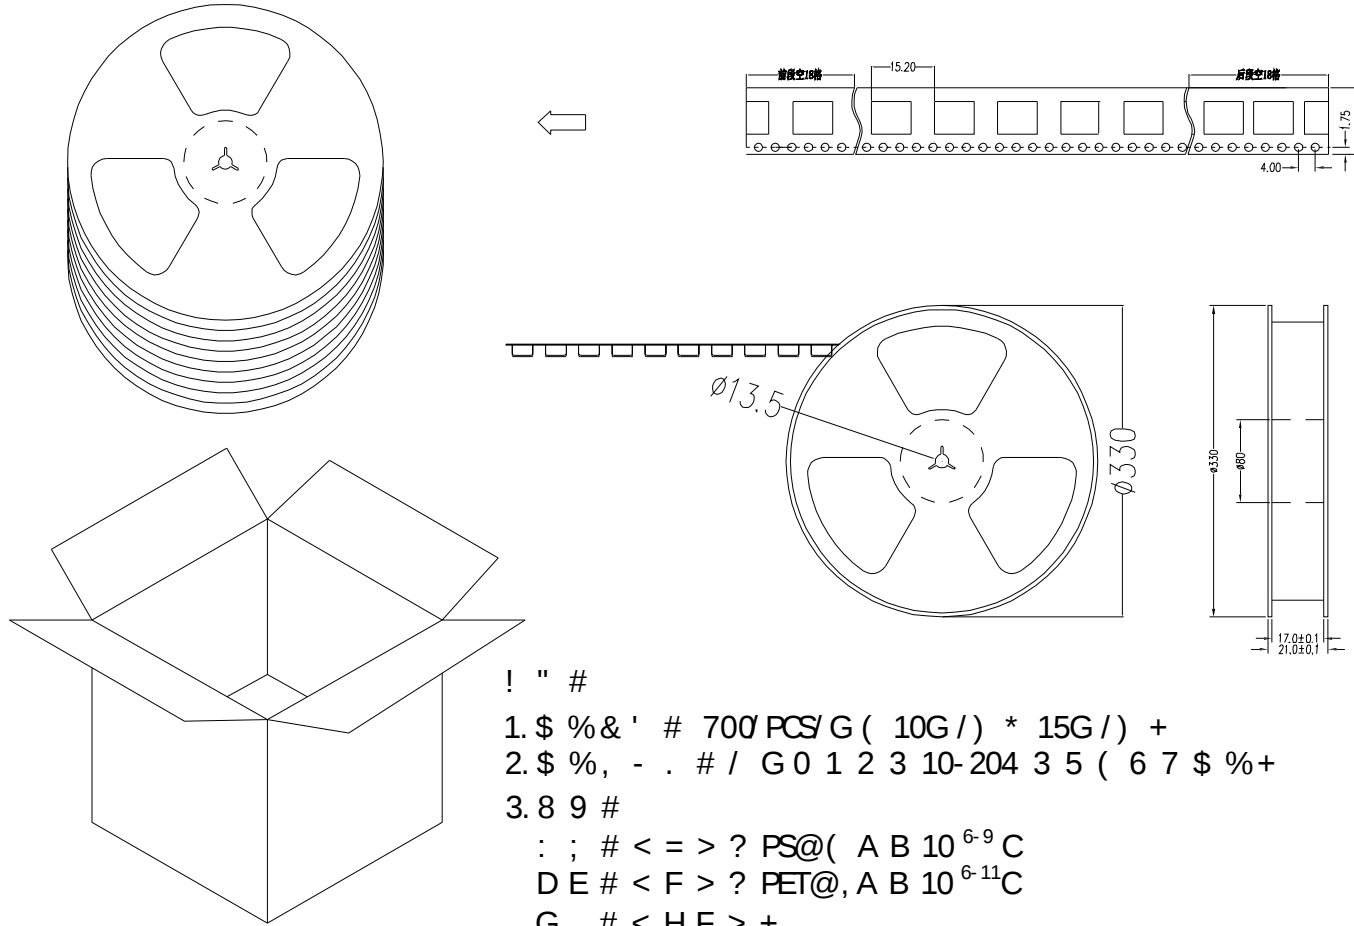

- ! " #
 1. \$ % & ' # 700 PCS/ G (10G /) * 15G /) +
 2. \$ %, - . # / G 0 1 2 3 10-204 3 5 (6 7 \$ % +
 3. 8 9 #
 : ; # < = > ? PS@ (A B 10⁶⁻⁹ C
 D E # < F > ? PET@, A B 10⁶⁻¹¹ C
 G # < H F > +
 I) J 5 # 345*345*23MM
 I) J 5 # 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 \$! c 2!•!•2!0 ° 9L€ œ (		NAME: Çá'¥¿ ^{a1} Ø 6x6x8.5 ìùÆ¬¬²»Đâ,Öμ¬Æ¬ 260G 9.2%Ä
.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		APPD. JM_Zheng		 PJ. NO.: TS.01.20-11-31-03 SIZE: A4 DRW NO.:
PDWG.NO: 0013-1		DR. SGF		FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2