

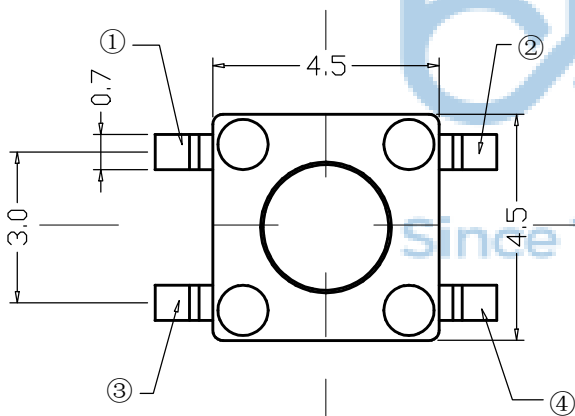
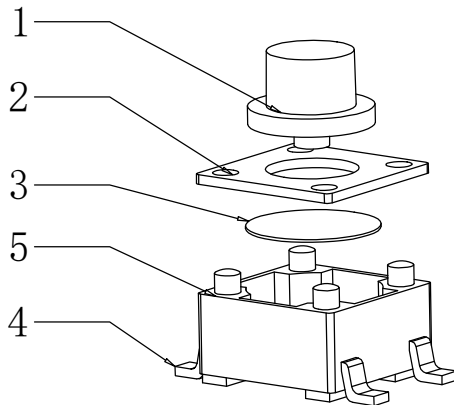


PCB线路板图

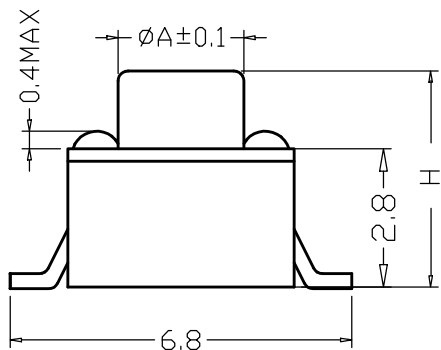

电路图



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				






性能	
额定规格	DC12V/50mA
接触电阻	≤100mΩ
绝缘电阻	≥100MΩ
耐电压	AC250V/min
动作力	160±50gf
使用寿命	10万次

A	H (高度)
φ2.40	3.8~4
φ2.35	4.3~5.5
φ2.1	7~8



序号	产品名称	材料规格	表面处理 颜色	数量
1	按钮	PPA		1
2	盖板	铁	镀铜锡	1
3	簧片	不锈钢		1
4	接线片	铜	镀银	1
5	底座	PPA		1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: / 0472-1		深圳市步步精科技有限公司	
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX: ±1*
APPD.	JM_Zheng	NAME: 轻触开关 4.5x4.5x3.8 四脚贴片 不锈钢弹片 6.8脚距 160gf 编带	
CHKD.	TSP	PJ. NO.: 101-172-013001-V5G SIZE: A4 DRW NO.:	
DR.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

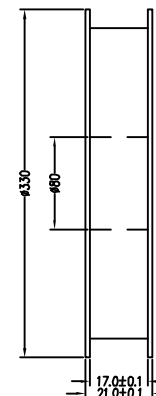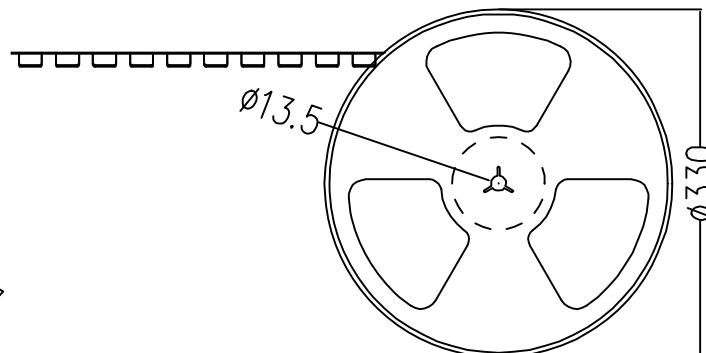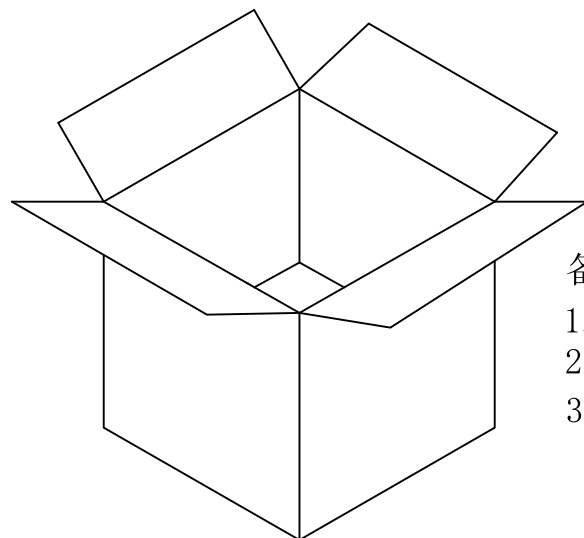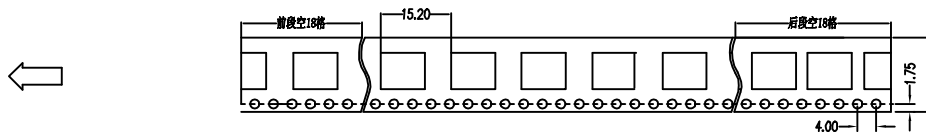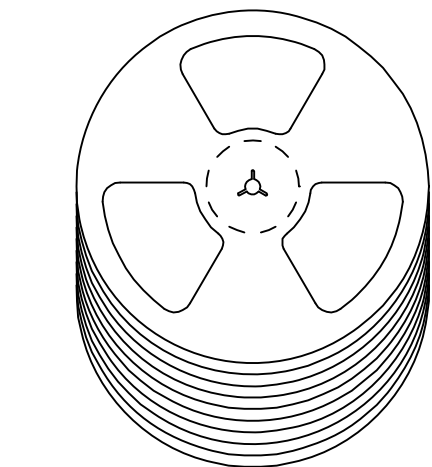

备注:

- 包装数量: 2000/PCS/3/4i£-103/4i/Ääi£
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	X': ±3'	NAME: Çá'¥ç'ª¹Ø 4.5x4.5x3.8 ĖÄ½Äü/Æ¬ ²»Đâ, Öµ'Æ¬ 6.8½Ä¼à 160gf ±ä'ø	
.XX: ±0.25	.X': ±2'	PJ. NO.: 101-172-013001-V5G	
.XXX: ±0.13	.XX': ±1'	SIZE: A4 DRW NO.:	
APPD. JM_Zheng		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
PDWG.NO: 0472-1	DR. LYX		