


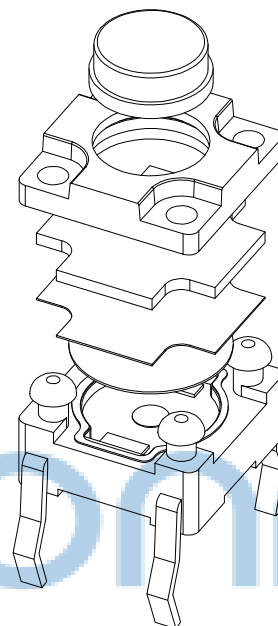
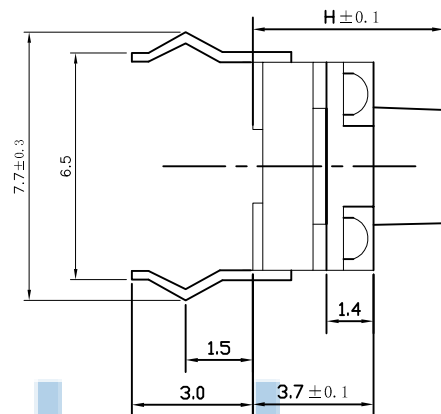



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	xqc;250±50gf
行程 travel	0.25±0.1mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min
防水层寿命 Endurance	3万次
弹片寿命 Endurance	10万次

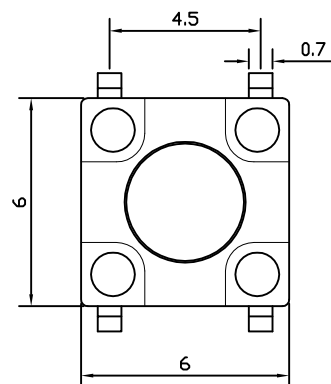

电路图
CIRCUIT DIAGRAM

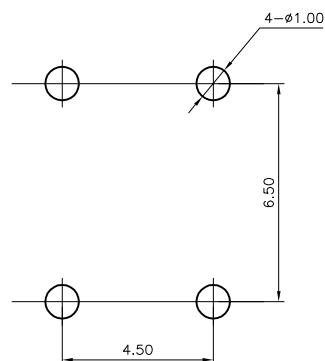

PCB. 焊接图

PCB. WELDING DRAWING




H	4	4.3	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5
	11	11.5	12	13	14	15								

G	按钮	PPA	1	黑色
F	盖板	PPA	1	黑色
E	防尘胶	硅胶	1	黑色
D	防水层	聚酰亚胺	1	橙黄色
C	弹片	不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀银
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINISH/COLOR
			10万	


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1

深圳市步步精科技有限公司	
NAME: 轻触开关 6x6x5.0 弯脚直插 不锈钢弹片 260gf 防水1P66	
APPD. JM_Zheng	PJ. NO.: 101-011-023001-Y5G
CHKD. TSP	SIZE: A4 DRW NO.:
DR. LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/2

PE袋规格: 260*185

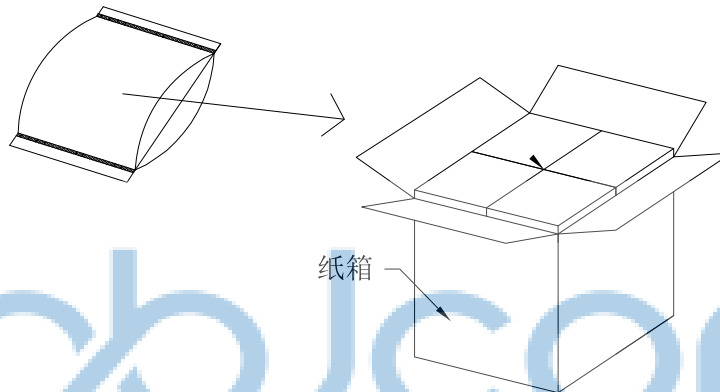

成品标签



1. 包装要求:
- 1.1 每个PE袋包装1000PCS;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计20000PCS ;
 - 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 轻触开关 6x6x5.0 弯脚直插 不锈钢弹片 260gf 防水IP66	
APPD.	JM_Zheng	P.J. NO.: 101-011-023001-Y5G	
CHKD.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO:	0278-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. LYX		SCALE: N/A REV.: A3 UNIT: mm PAGE: 2/2	