


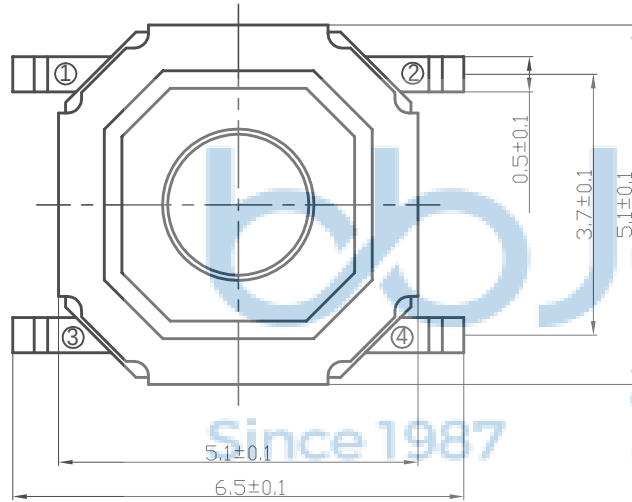


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

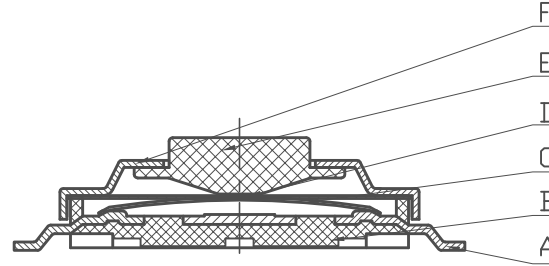


原理图

- 技术要求:
- 零部件表面光洁无划伤, 水花, 变形, 影响外观及性能等缺陷。
 - 额定电流: 50mA.12V DC, 绝缘电阻100M Ω min, 100V DC, 介电强度250V AC for 1min, 接触电阻100m Ω max。
开关手感明显, 档位清晰可靠, 无卡滞现象, 消除外力后, 应能快速回位。160GF $\pm$ 30GF

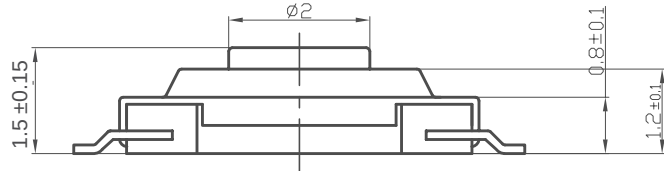


5	盖板	不锈钢0.13	1	酸洗
4	按钮	黄铜(镀镍)	1	酸洗
3	簧片	进口不锈钢覆银	1	8万
2	底座	LCP黑	1	
1	卡件	磷铜0.15	1	镀银
序号	名称	材料	数量	备注

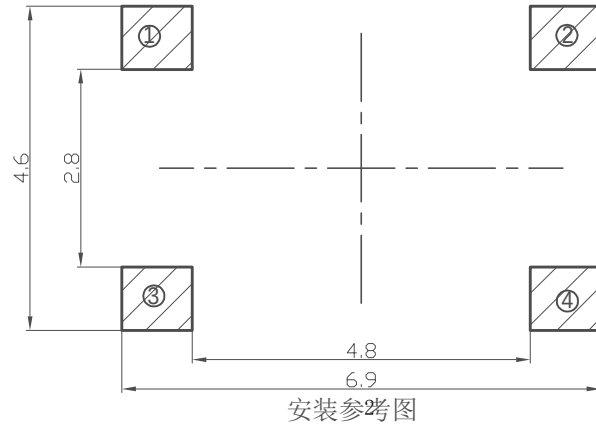

安装参考图

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$		NAME: 轻触开关 4x4x1.5 铜头贴片 改柄颜色(铜头镀镍) 不锈钢弹片 160G			
APPD.		JM_Zheng		PJ. NO.: TS.03.01-12-3Z-01			
CHKD.		LYX		SIZE: A4 DRW NO.:			
PDWG.NO: 0278-1		DR.		SGF		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0		UNIT: mm PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

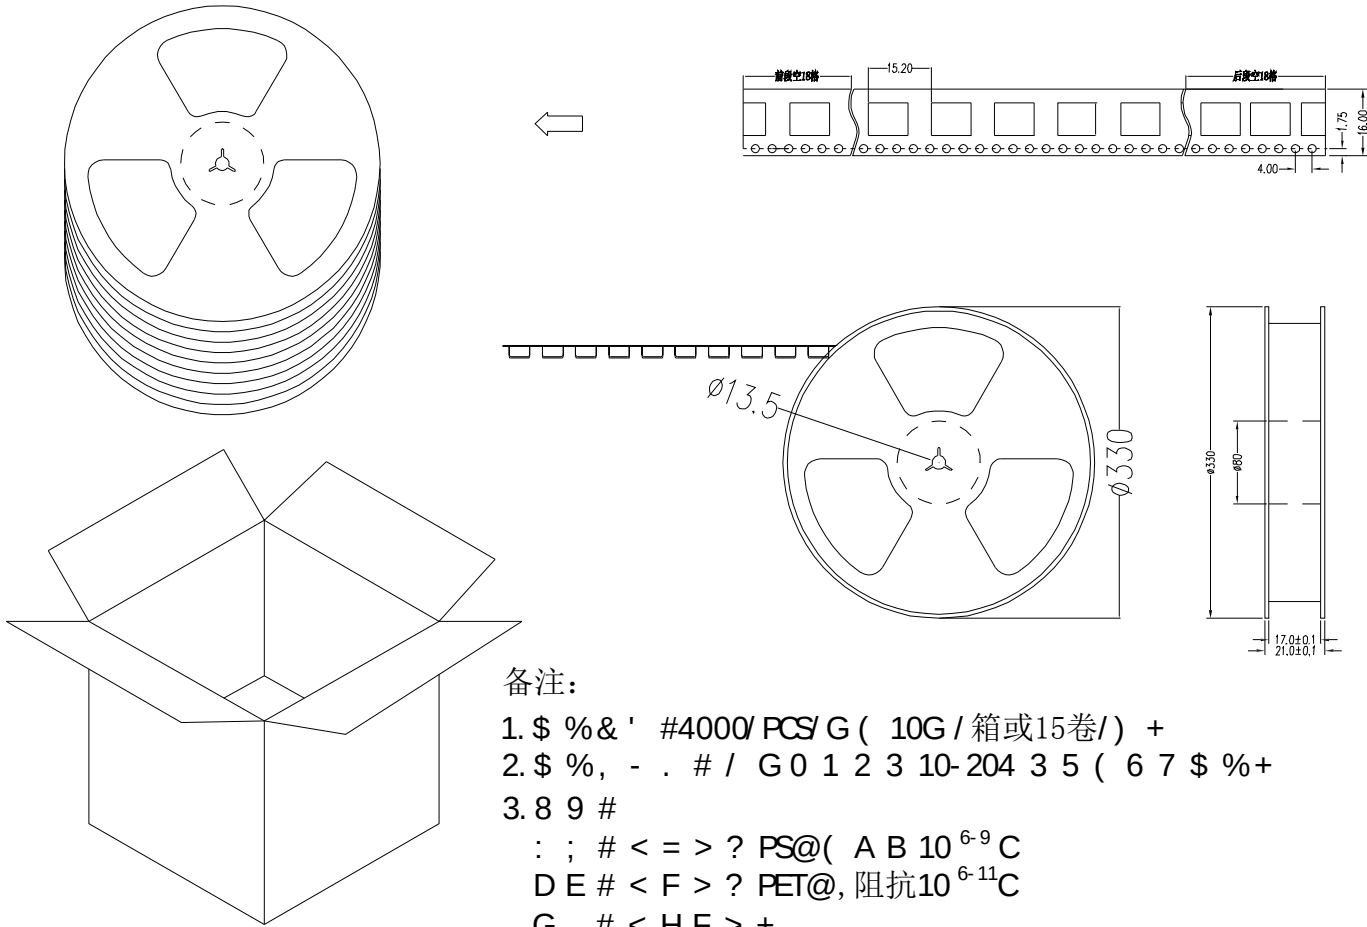

备注:

1. \$ % & ' #4000/ PCS/ G (10G / 箱或15卷/) +

2. \$ %, - . # / G 0 1 2 3 10-204 3 5 (6 7 \$ % +

3. 8 9 #

: ; # < = > ? PS@ (A B 10⁶⁻⁹ C

D E # < F > ? PET@, 阻抗10⁶⁻¹¹ C

G # < H F > +

I) J 5 # 345*345*23MM

I) J 5 # 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0278-1		DR. SGF		NAME: Çá'¥ç²¼Ø 4x4x1.5 í-í-íü/E- , Ä±úÑÔÉ«(í-í-í)ÆÄØE©»Dâ, Ôµ-Æ- 160G	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		APPD. JM_Zheng		PJ. NO.: TS.03.01-12-3Z-01	
CHKD. LYX		SIZE: A4		DRW NO.:		FINISH: SEE NOTES	
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 2/2	