

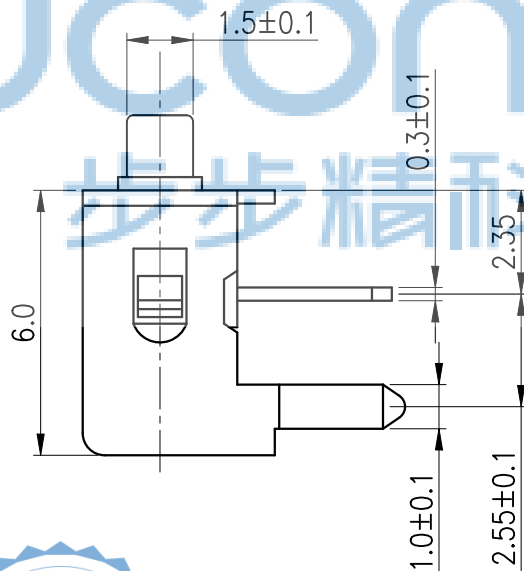
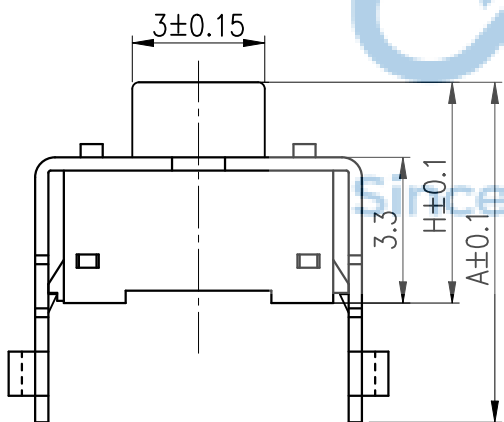


安装参考图

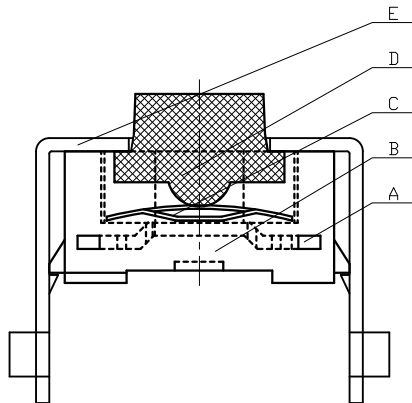

H		
4.3	5	7
A		
7	7.7	9.7

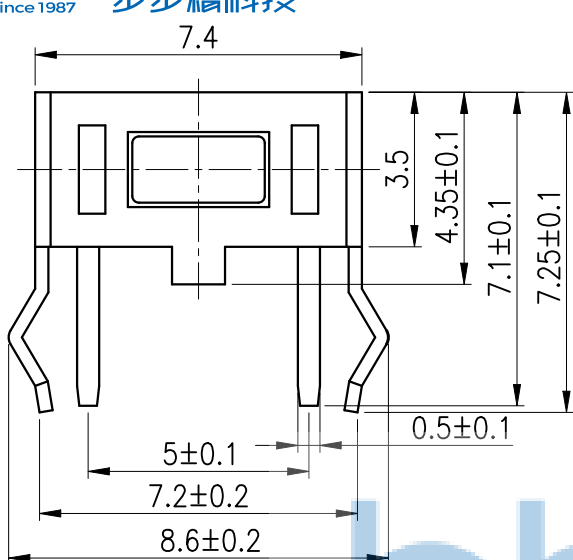

- 技术要求:
- 塑料件表面光洁无划伤, 水花, 变形, 影响外观及性能等缺陷。
 - 额定电流: 50mA. 12V DC, 绝缘电阻100MΩ min, 100V DC, 介电强度250V AC for 1min, 接触电阻 100mΩ max 。260° 高温后衰变值在初始值的 20%以内;
 - 开关手感明显, 档位清晰可靠, 无卡滞现象, 消除外力后, 应能快速回位。按力: 160/260±30GF


E	盖板	0.3铁皮	1	镀锡
D	按钮	PPA白	1	
C	簧片	进口不锈钢覆银	1	
B	底座	PPA黑	1	
A	卡件	黄铜厚0.3	1	镀银
序号	名称	材料	数量	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0278-1


深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: 轻触开关 3x6x5.0 两脚侧按 带支架 方头白柄 不锈钢弹片 260GF
APPD. JM_Zheng	PJ. NO.: TS.35.13-51-38-01	
CHKD. LYX	SIZE: A4 DRW NO.:	
DR. TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

PE袋规格: 260*185

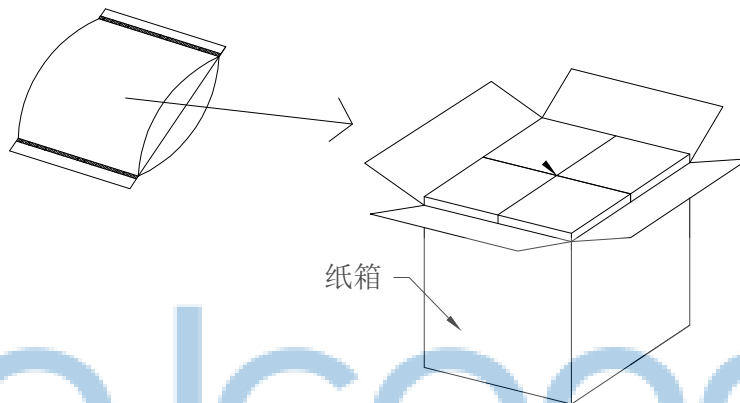

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: 轻触开关 3x6x5.0 两脚侧按 带支架 方头白柄 不锈钢弹片 260GF	
APPD.	JM_Zheng	PJ. NO.: TS.35.13-51-38-01	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0278-1	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR. TSP		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2