




- 1、工作电压 Working Voltage: 30V DC;
- 2、工作电流 Working Current: 0.05A;
- 3、接触电阻 Contact Resistance: $\leq 100\text{m}\Omega$;
- 4、绝缘电阻 Insulation Resistance: $\geq 100\text{M}\Omega$;
- 5、动作力 Press Force: 80-90gf;
- 6、寿命 Life: ≥ 1000000 次。

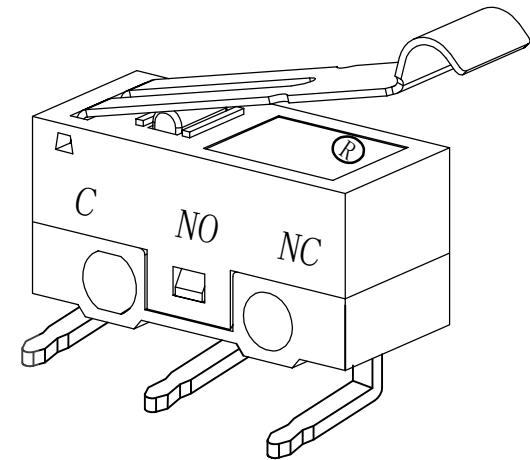

6	盖 板	PA66	黑 色	-----
5	按 柄	POM	红 色	-----
4	簧 片	磷铜	-----	-----
3	触 点	银	-----	-----
2	基 座	PA66	本 色	-----
1	端 子	H62Y 0.5mm	-----	表面镀银
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0104-1



 深圳市步步精科技有限公司

.X: ± 0.38	X*: ± 3
.XX: ± 0.25	.X*: ± 2
.XXX: ± 0.13	.XX*: ± 1

NAME:

小微动弯柄左弯透明基座

APPD.	JM_Zheng
-------	----------

PJ. NO.:	WK.01.06-11-0002
----------	------------------

CHKD.	LYX
-------	-----



FINGER






SIZE: A4 | DRW NO.:

: SEE NOTES	MAT'L.: SEE NOTES
-------------	-------------------



DR.	SGF
-----	-----

FINISH
SCALE

: SEE NOTES		MAT L.: SEE NOTES	
N/A	REV: A0	UNIT: mm	PAGE: 1/2

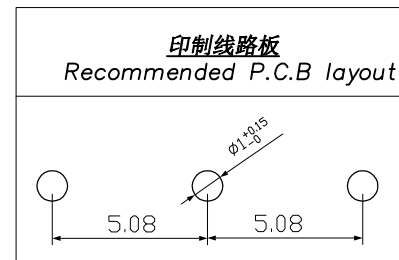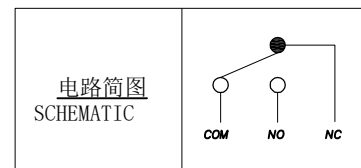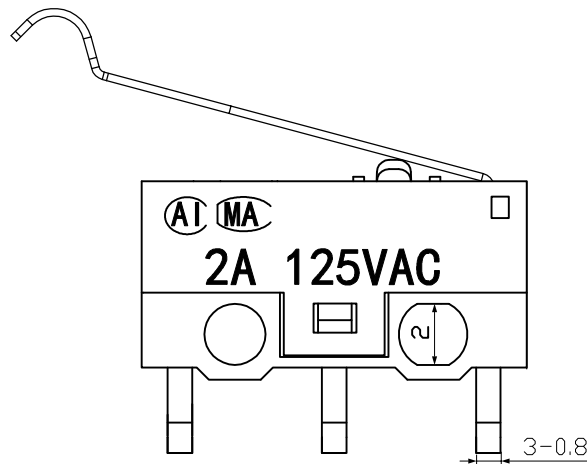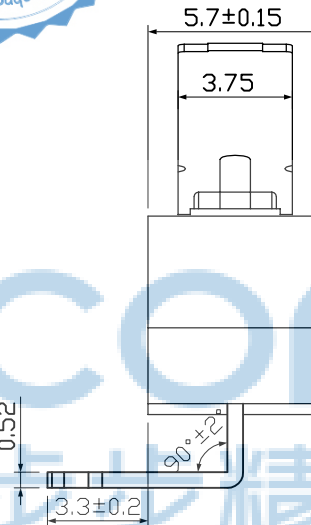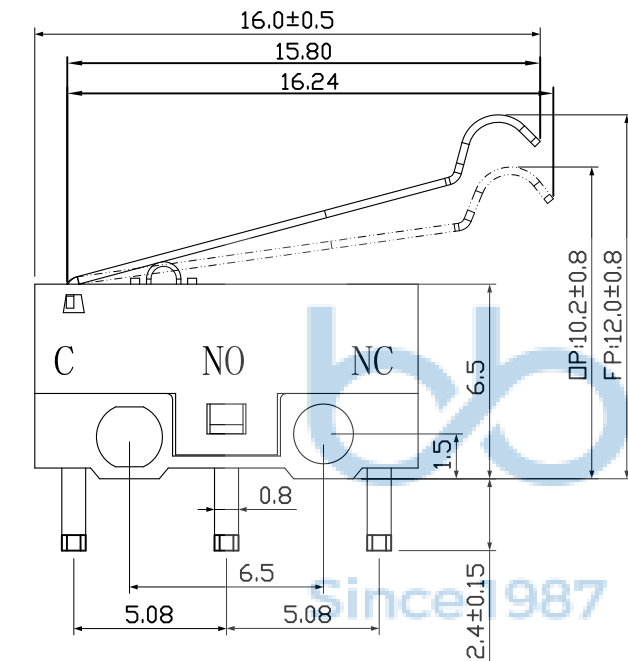

PE袋规格:***X*** (以实际出货为准)

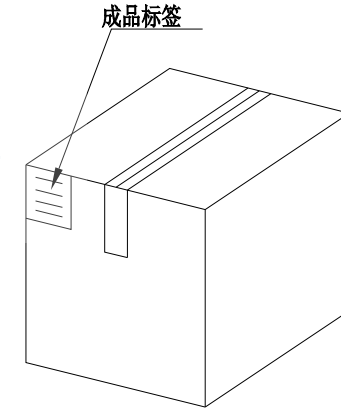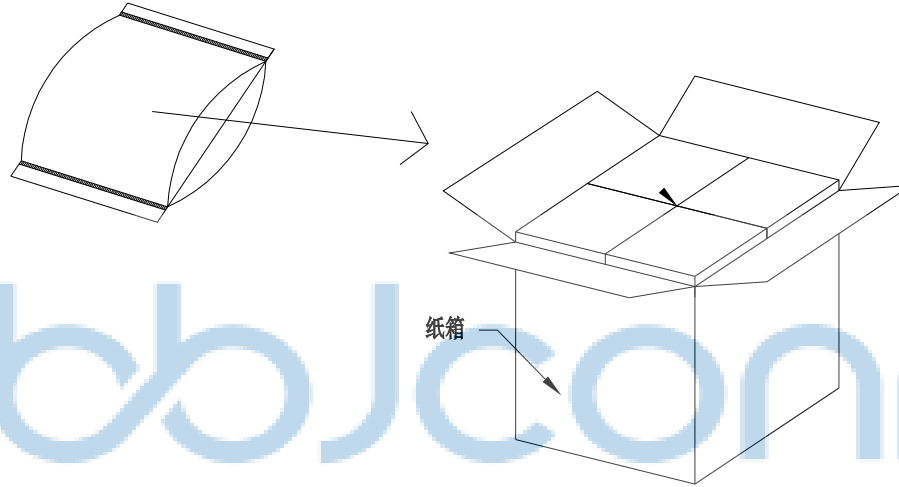

1. 包装要求:

- 1.1 每PE袋包装 1000PCS;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0104-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		NAME: 小微动弯柄左弯透明基座	
		APPD.	JM_Zheng			PJ. NO.: WK.01.06-11-0002	
		CHKD.	LYX			SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES		MAT'L.: SEE NOTES			
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 2/2	