



技术要求:

1. 电参数Rating: 见字唛;
2. 接触电阻Contact Resistance: $\leq 50m\Omega$;
3. 绝缘电阻Insulation Resistance: DC 500V 100M Ω Min;
4. 介电强度Dielectric Strength:
针脚-针脚 Terminal-Terminal AC 500V 10mA/5S;
针脚-手柄 Terminal-knob AC 3000V 10mA/5S;
5. 电气寿命Load Life: 50000 Cycles;
6. 操作力Operating Force: 40~100gf;
7. 工作温度Operating Temperature: -25℃ ~ 125℃;
8. 开关功能Switched Function: ON-(ON);
9. 未标注公差按以下执行Note tolerances of imlemented:
 $x, \pm 0.30, x \pm 0.20, xx \pm 0.10, \angle \pm 2^\circ$.

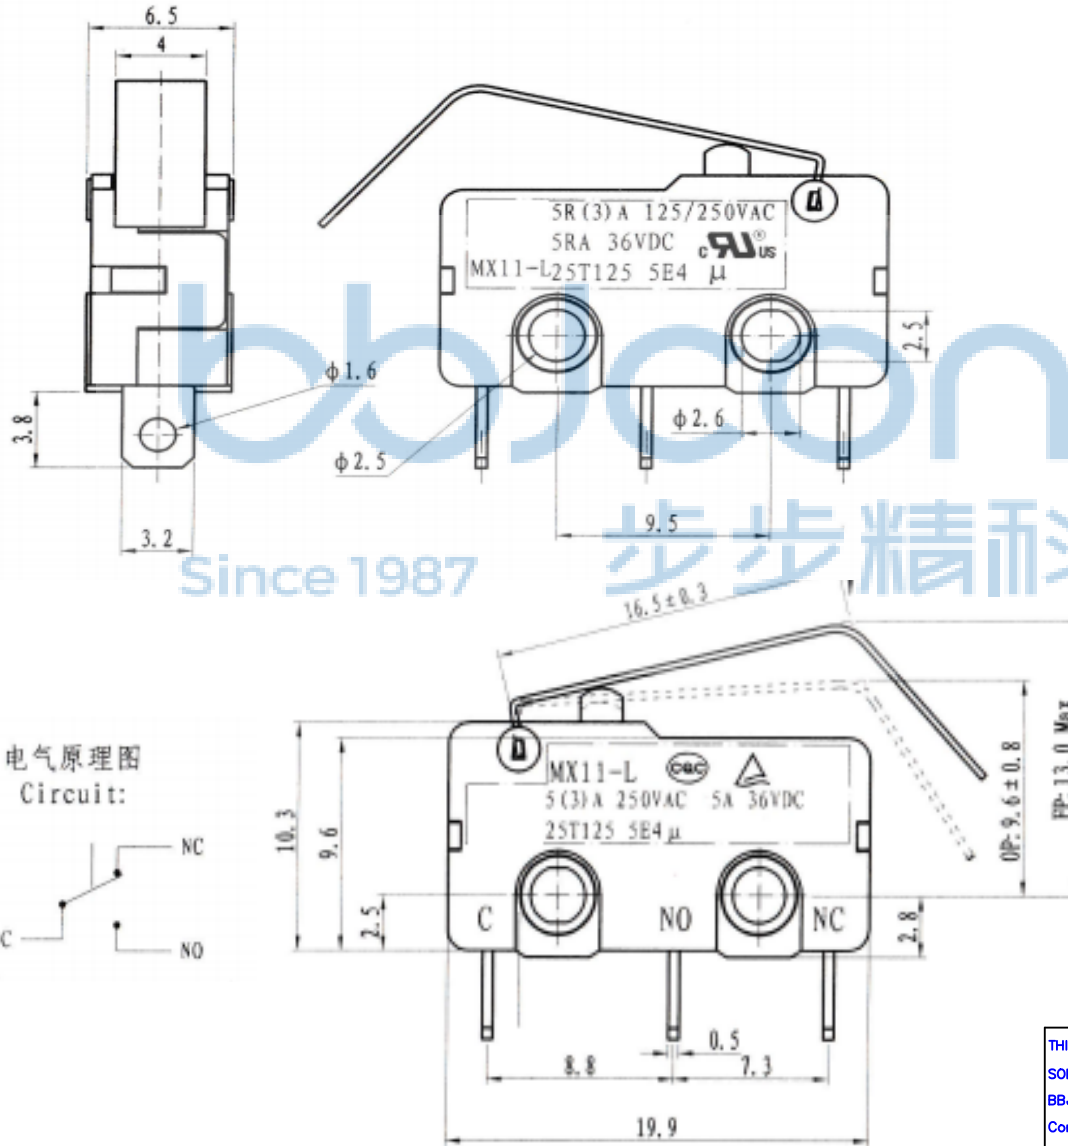


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
PX: ±0.38	XX: ±0.25	XX': ±3"	XX'': ±2"
XXX: ±0.13	XXX': ±1"	NAME:	中微动 带弯柄 三脚插 MX11-L-215-C-BAA-13
APPD.	JM_Zheng	PJ. NO.:	WK.02.06-37-0001
CHKD.	LYX	SIZE: A4	DRW NO.:
PDWG.NO:	0491-1	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR.	SGF	SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 1/2

PE袋规格:***X*** (以实际出货为准)

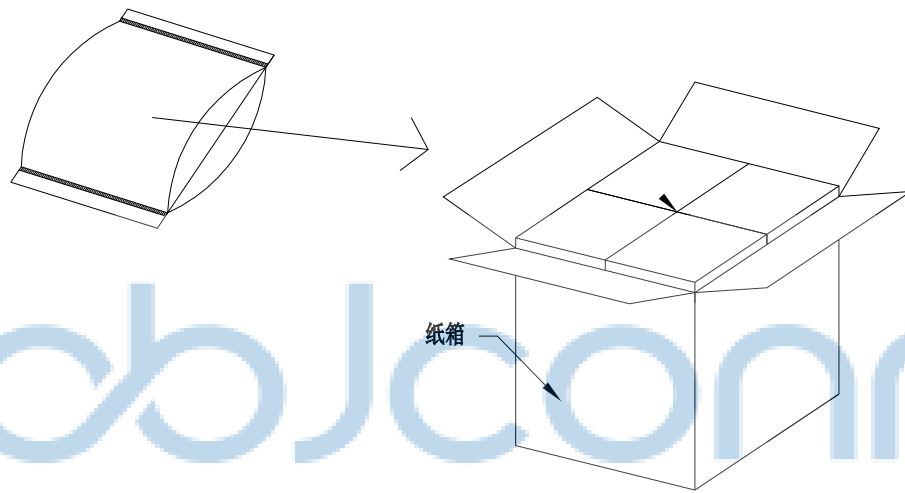

成品标签



1. 包装要求:

- 1.1 每PE袋包装 200 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计 4000 PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO:		深圳市步步精科技有限公司						
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		NAME: 中微动 带弯柄 三脚插 MX11-L-215-C-BAA-13		
		APPD.	JM_Zheng			PJ. NO.: WK.02.06-37-0001		
		CHKD.	LYX			SIZE: A4	DRW NO.:	
		FINISH: SEE NOTES		MAT'L.: SEE NOTES				
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 2/2		