


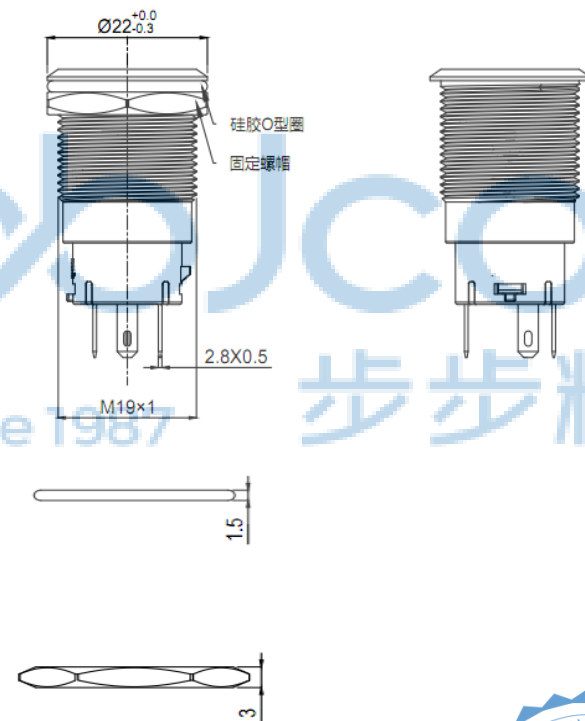
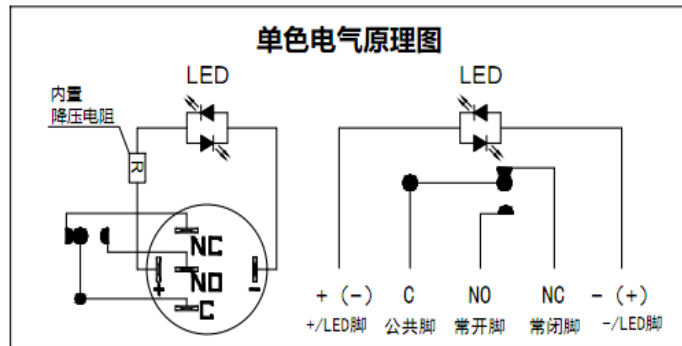

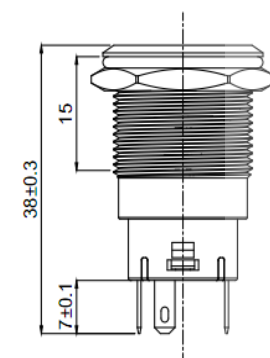




轴视图



安装视图

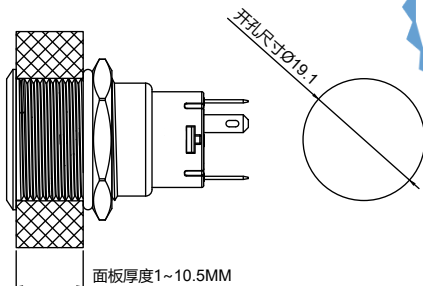

性能参数

发热电流: U_i : AC250V, I_{th} : 5A;
额定电流: 3A/DC36V;
工作环境温度: $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$;
按压行程: 自锁3mm, 自复2.5mm $\pm$ 0.1;
接触行程: 1.5mm $\pm$ 0.1;
按压扭力: $\leq$ 4N;
NO脚反推扭力: $\leq$ 30N;
螺帽装配力矩: 5-14N.m;
防护等级: IP67;
防暴等级: IK10;
LED灯寿命: 40000h;
LED灯功耗: 约20mA以下;
接触电阻: $\leq$ 50m Ω ;
绝缘电阻: $\geq$ 1000M Ω ;
电气寿命: 50000次以上;
机械寿命: 500000次以上;
工频耐压: 2000V/1min;

材质参数

发光区域: PC;
按键: 不锈钢/铝合金氧化;
外壳: 不锈钢/黄铜镀镍、铬/铝合金氧化;
O型圈: 硅胶;
固定螺帽: 黄铜镀镍;
LED底座: PC;
C/NO/NC底座: 尼龙PA46;
接触材料: 银合金;
LED引脚: H62电镀银;
C/NO/NC引脚: H62电镀金;

连接形式

- 线材焊接的温度及时长: $320^{\circ}\text{C} \pm 20^{\circ}\text{C}$, 时长3秒以下;
- 可配专用接插件使用:
 - 开关功能线材: 绿线C、蓝线NO、黄线NC;
 - LED功能线材: 红线正极、黑线负极、LED不分正负极;






1	2	3	4	5	6	7	8	9	10	11
19	A2	—	P	11	■ / DY	▲	▼	/	◎	
1	企业名称	深圳市步步精科技有限公司								
2	安装开孔	19mm								
3	系列编号	A2 (A2型号金属按钮开关)								
4	头部类型	P (平头)、G (高头)								
5	开关组合	11 (1NO, 1NC, 1常开1常闭)、22 (2NO, 2NC, 2常开2常闭)								
6	操作类型	F (自复式)、Z (自锁式)								
7	发光类型	E (环形)、DY (电源符号)、D (单点状)、E+DY (环形+电源符号)、E+D (环形+单点状)								
8	发光颜色	R (红光)、G (绿光)、B (蓝光)、Y (黄光)、W (白光)、O (橙光)、P (紫色)								
9	额定电压	AC/DC: 3V, 6V, 12V, 24V, 36V, 48V, AC: 60V, 110V, 220V								
10	外壳材质	N (黄铜镀镍)、S (不锈钢304本色)、A (铝合金氧化、默认黑色)、ST (不锈钢镀钛色)								
11	脚位类型	Y (引脚式) 此款型号可不表达								

编码规则说明



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0771-1

深圳市步步精科技有限公司		NAME:	金属开关 19A-P11D-DY 复位自锁带灯金属电源符号按钮开关
.X: $\pm$ 0.38	X': $\pm$ 3'	PJ. NO.:	904-070-230003-M4G
.XX: $\pm$ 0.25	X'': $\pm$ 2''	SIZE: A4	DRW NO.:
.XXX: $\pm$ 0.13	XX': $\pm$ 1'	FINISH: SEE NOTES	MAT'L.: SEE NOTES
APPD. JM_Zheng	CHKD. LYX	SCALE: N/A	REV.: A0
DR. LHC		UNIT: mm	PAGE: 1/1

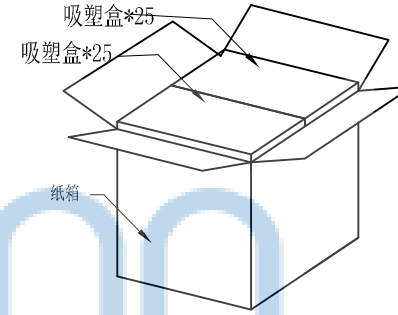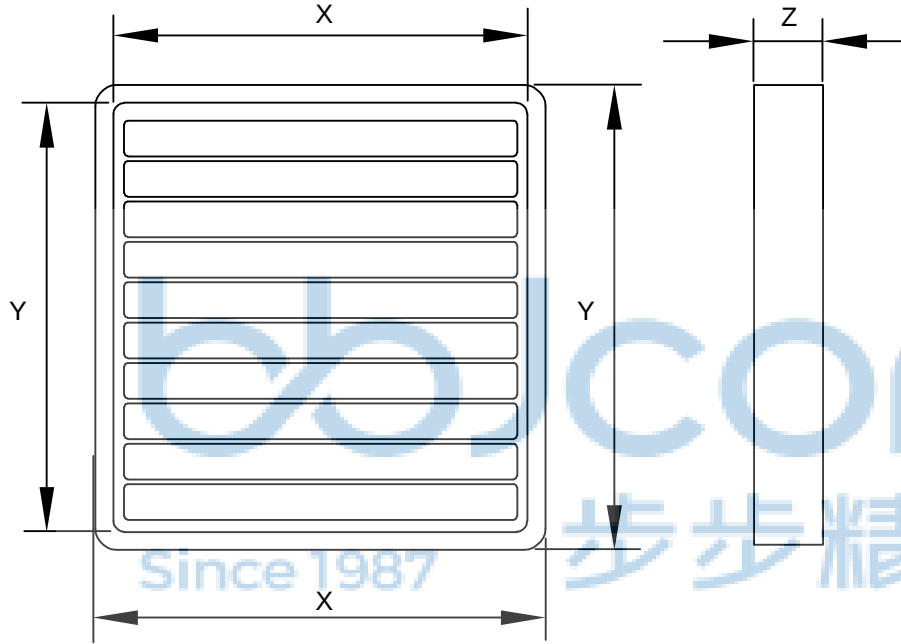

纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装 50 pcs;
- 1.2 每50盘放一箱, 共计2500PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			深圳市步步精科技有限公司	
PDWG.NO: 0771-1		APPD. JM_Zheng	NAME: 金属开关 19A-P11D-DY 复位自锁带灯金属电源符号按钮开关	
CHKD. LYX		DR. LHC	PJ. NO.: 904-070-230003-M4G	
			SIZE: A4	DRW NO.:
			FINISH: SEE NOTES	MAT'L.: SEE NOTES
			SCALE: N/A	REV.: A0
			UNIT: mm	PAGE: 2/2