
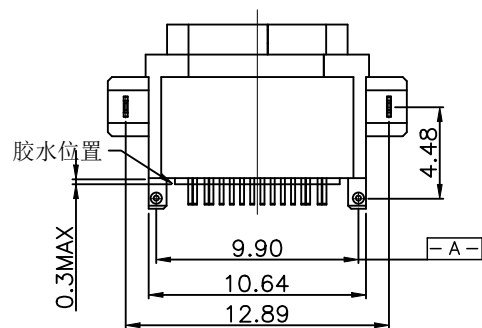
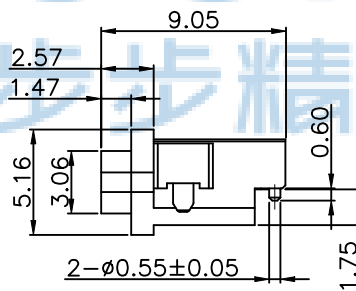
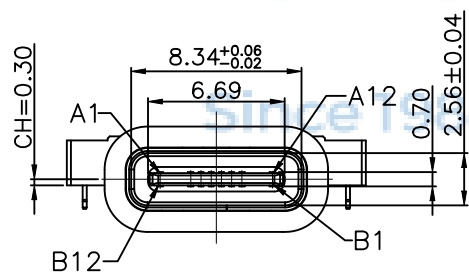
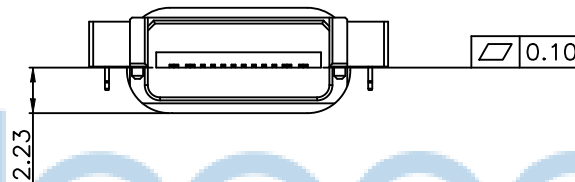


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTES:


SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

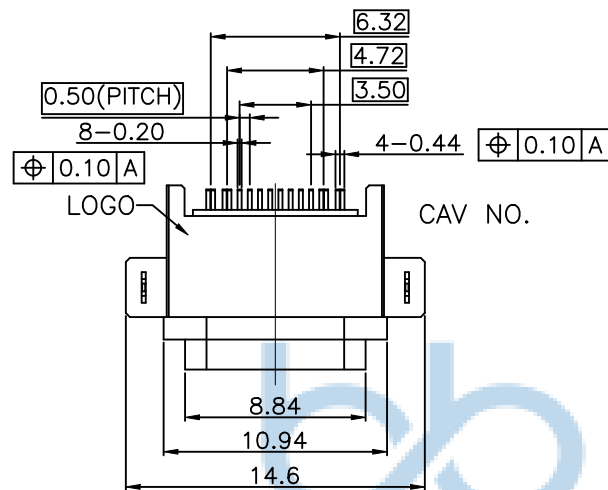


4	Shell2	1	SUS304 Ni Plating T=0.20mm	Ni:40~120u"
3	Shell	1	PA9T(G.F30%)	
2	Contact	5	Copper alloy C7025 Au/Ni Plating Au:1u" Ni:50~80u" Contact area: Au=3u"	T=0.15mm
1	Housing	1	PA9T(G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX: ±1"		NAME: TYPE-C 16P 防水母座俩脚插沉板2.23 L=9.05 带柱IPX8 CH=0.30	
APPD	JM_Zheng		PJ NO: UC.01.31-1W-0001
CHKD	LYX		SIZE:A4 DRW NO:
PDWG NO: 0388-1		FINISH:SEE NOTES	MAT'L:SEE NOTES
DR		SCALE:N/A	REV:A0 UNIT:mm PAGE:1/3

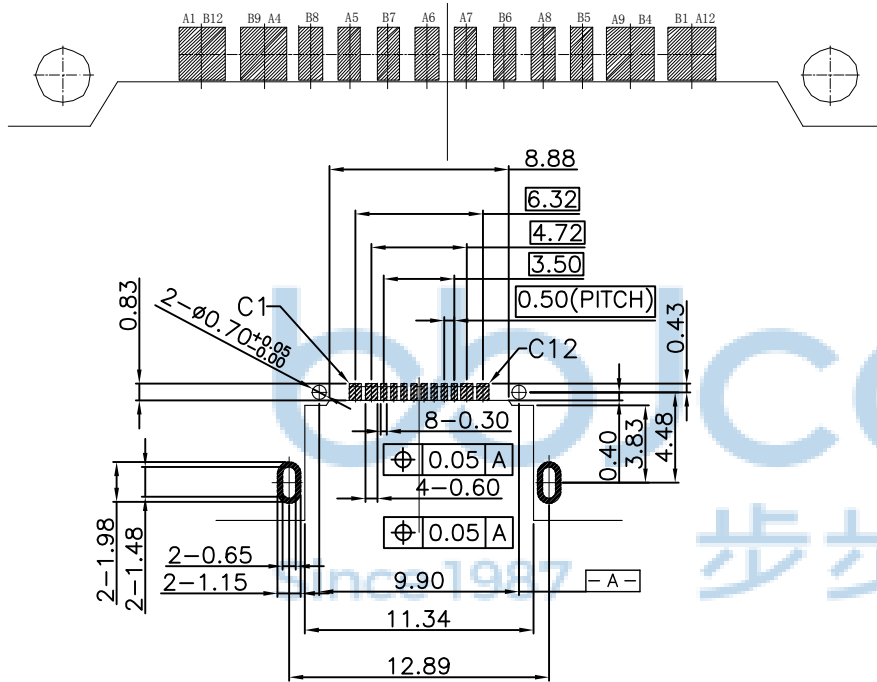

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

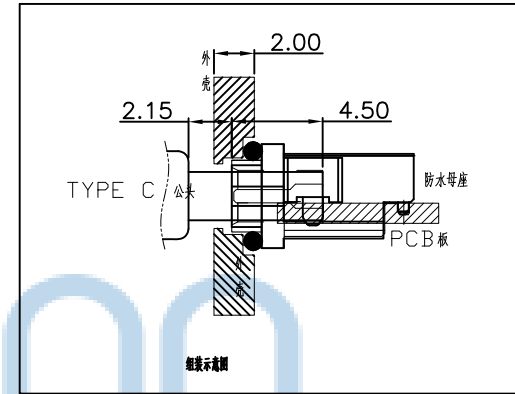


INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	DP1	DN1	SBU1	VBUS			GND
GND			VBUS	SBU2	DN2	DP2	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SINGAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	DP2	SBU1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

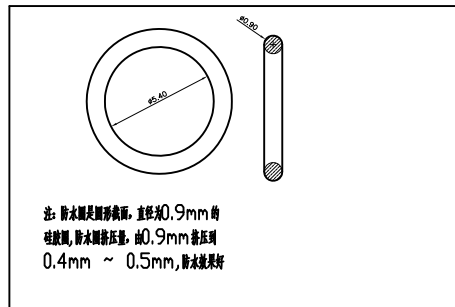

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0388-1

深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X': ±3'
.X': ±2'
.XX': ±1'

APPD JM_Zheng
CHKD LYX
DR HMY


NAME: TYPE-C 16P 防水母座俩脚插沉板2. 23
L=9.05 带柱IPX8 CH=0.30

PJ NO: UC. 01. 31-1W-0001
SIZE:A4 DRW NO:


FINISH:SEE NOTES
SCALE:N/A REV:A0

MAT'L:SEE NOTES
UNIT:mm PAGE:2/3

- 一.
- 1) 将成品一一放入REEL包装盘内, 依同一方向放入.
 - 2) 包装时, 如图所示.
 - 3) 一个REEL包装盘放置 700 个成品.

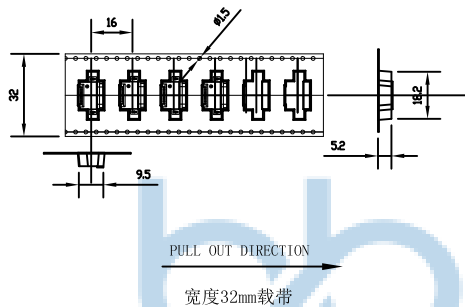

- 二.
- 1) 装盘前先把前面空16PCS, 然后再开始装盘, 尾端也需空出16PCS.
 - 2) 装满成品的REEL包装盘如下图所示.



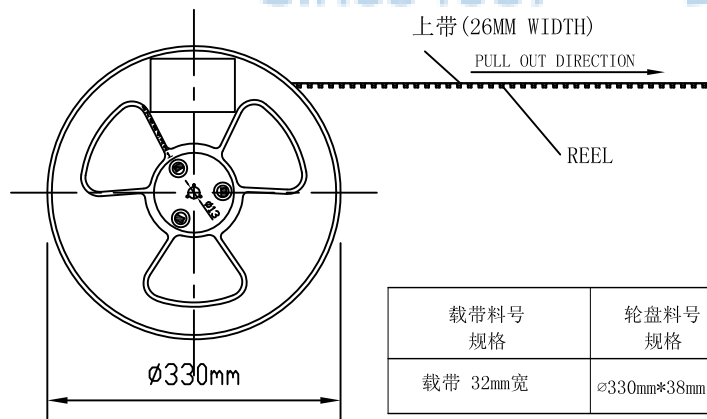


载带料号 规格	轮盘料号 规格	冷封上带料号 规格
载带 32mm宽	$\phi 330mm \times 38mm$	26mm width



三.

- 1) 每盘产品贴一张内标签.
- 2) 纸箱上下各放一块隔离板, 将每盘产品依次放入箱内, 每箱放8盘产品 (5600PCS), 四周用三角板固定. 最后用透明胶纸将纸箱四周封实, 箱外贴上外标签.

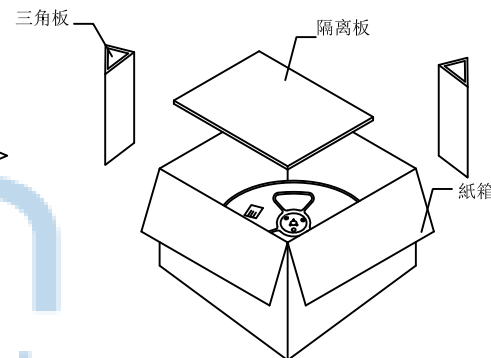

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0388-1

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X': $\pm 3'$ X'': $\pm 2'$.XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR HMY

NAME: TYPE-C 16P 防水母座俩脚插沉板2. 23
L=9.05 带柱IPX8 CH=0.30

PJ NO: UC.01.31-1W-0001

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:3/3