

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

注释:

1. 材料: 见材料清单

2. 通用特性:

2.1 共面度: 0.10 Max.

2.2 额定电流: 5A

2.3 接触电阻: 40 Ω Min/ 绝缘电阻: 100M Ω Min








2.4 耐电压: 100伏交流

2.5 力学特性: 初始插入力: 5~20N 拔出力: 8~20N

2.6 耐久后拔出力: 6~20N

2.7 耐久性: 10000次

3. 防水等级 IPX8

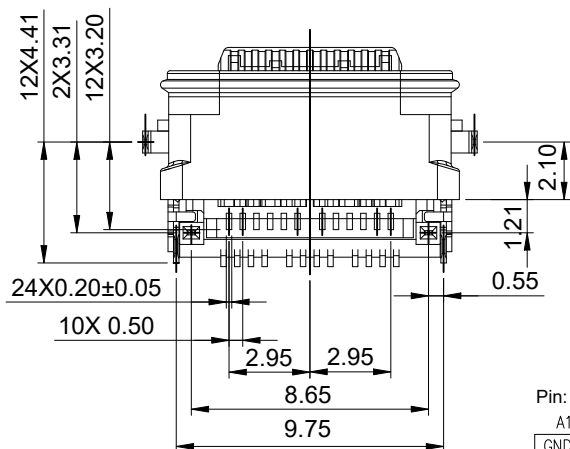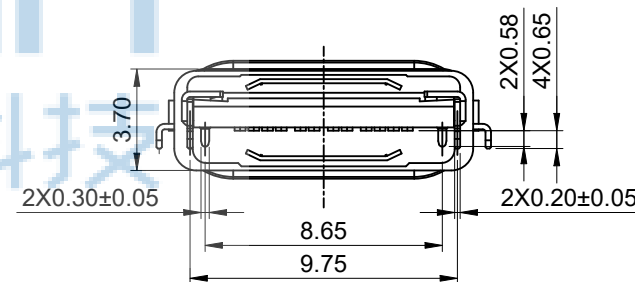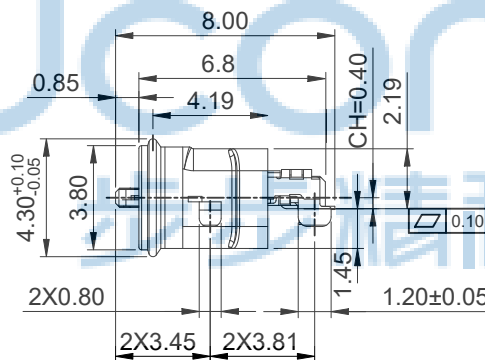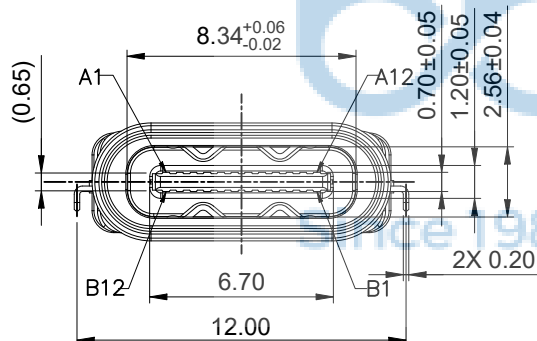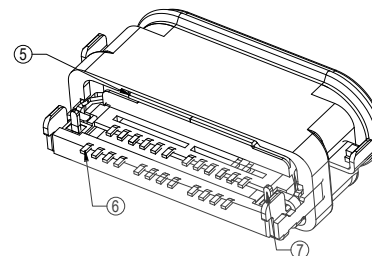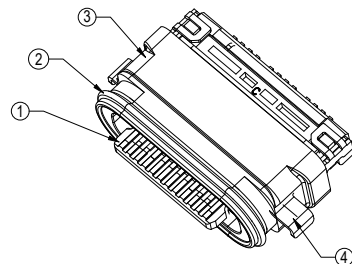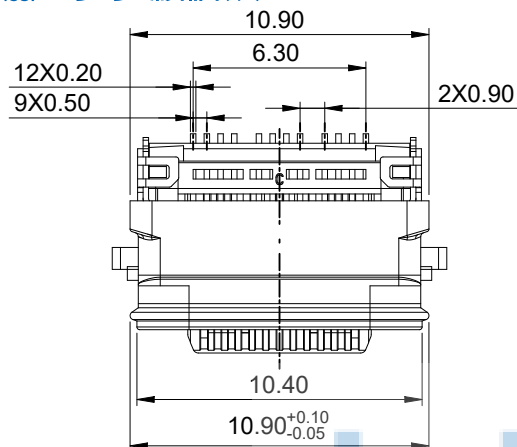

Pin:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1





7	MID PLATE	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
6	TERMINAL	1	C18400	MATING SIDE: AU15U"; SOLDER TAIL: GOLD FLASH, 50u" NICKEL OVERALL.
5	SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
4	SOLDER PIN	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
3	SHELL HOUSING	1	High-TEMP. PLASTIC	BLACK
2	LIM	1	SILICA GEL	BLACK
1	MAIN HOUSING	1	High-TEMP. PLASTIC	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH

BILL OF MATERIAL

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0541-1



深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" X': ±2" X': ±1"
NAME: TYPE-C 24 防水母座 四脚插 无柱 双排SMT L=6.8 CH=0.4 舌片外露0.85 沉板1.42 IPX8 编带	
APPD. JM_Zheng CHKD. LYX DR. SGF	PJ. NO.: 126-221-240002-X7G SIZE: A4 DRW NO.: FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm
MAT'L.: SEE NOTES PAGE: 1/3	

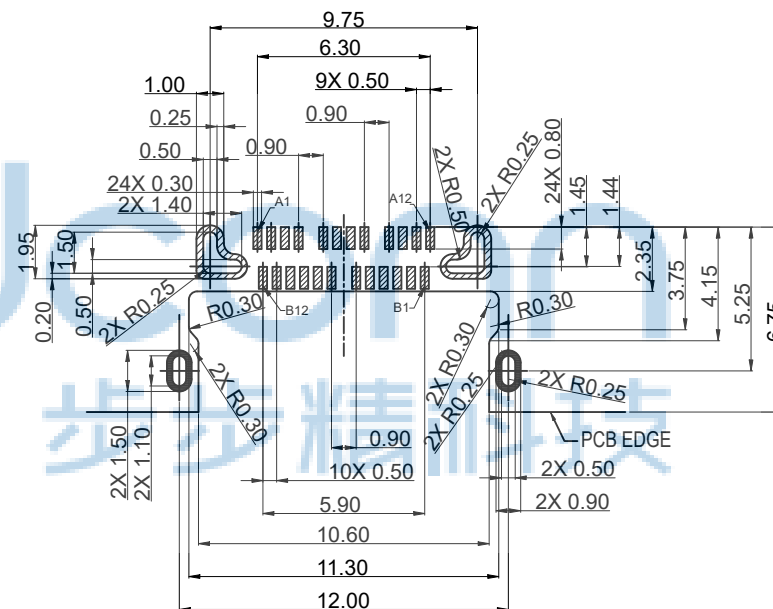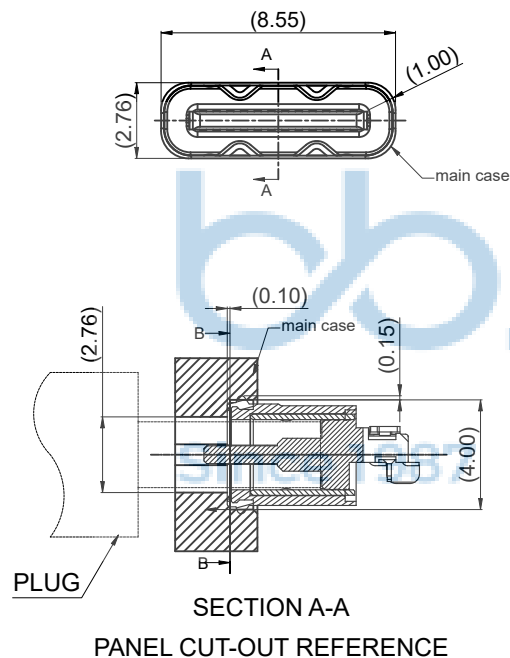

RECOMMENDED PCB LAYOUT
(Tolerance=±0.05)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: TYPE-C 24 防水母座 四脚插 无柱 双排SMT L=6.8 CH=0.4 舌片外露0.85 沉板1.42 IPX8 编带	
.X: ±0.38 .X': ±3° .XX: ±0.25 .X': ±2° .XXX: ±0.13 .XX': ±1°		APPD. JM_Zheng		P.J. NO.: 126-221-240002-X7G	
CHKD. LYX		SCALE: N/A		REV.: A0	
PDWG.NO: 0541-1		DR. SGF		UNIT: mm	
				PAGE: 2/3	

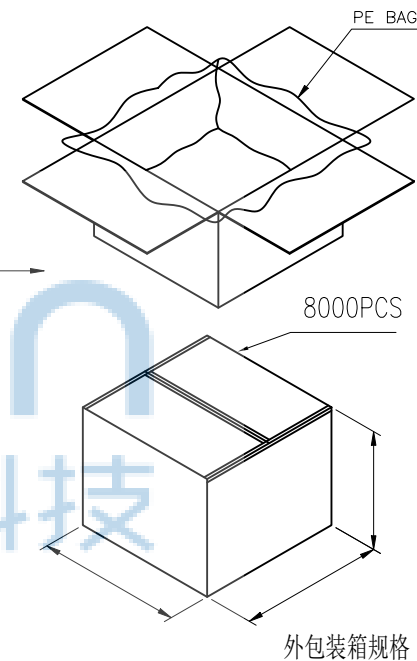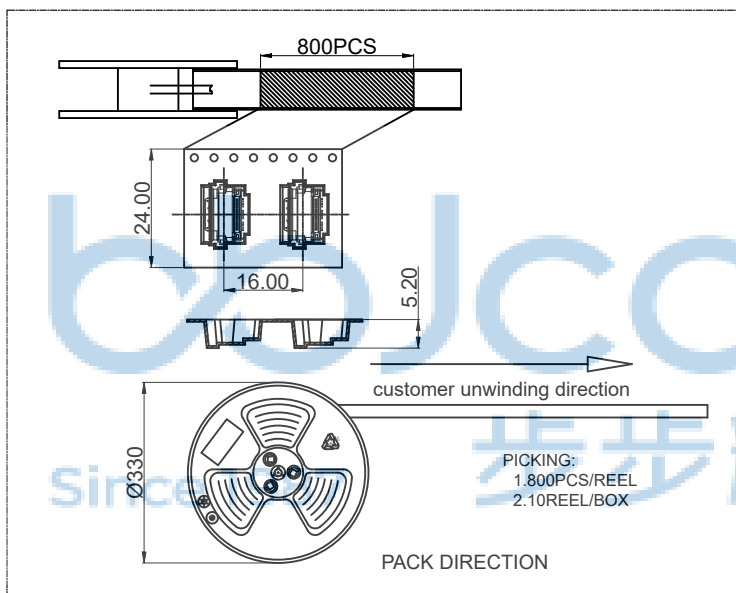

	REEL	CARTON
CONNECTOR (PCS)	800	9600

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG:NO: 0541-1			深圳市步步精科技有限公司					
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		NAME: TYPE-C 24 防水母座 四脚插 无柱 双排SMT L=6.8 CH=0.4 舌片外露0.85 沉板1.42 IPX8 编带			
	APPD.	JM_Zheng			PJ. NO.: 126-221-240002-X7G			
	CHKD.	LYX			SIZE: A4 DRW NO.:			
					FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE:N/A		REV.: A0	UNIT: mm	PAGE: 3/3