

NOTE:

1. Electrical:

- 1.1 RATING CURRENT: 0.5A;
- 1.2 RATING VOLTAGE: 40V;
- 1.3 CONTACT RESISTANCE: 30 mΩ MAX.;
- 1.4 INSULATION RESISTANCE: 100MΩ MIN.;
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE






2. Mechanical:

- 2.1 Mating Force: 4.5Kgf Max.;
- 2.2 Unmating Force: 1.0~4.0Kgf;
- 2.3 DURABILITY: 10000 CYCLES.



3. Environmental

- 3.1 OPERATING TEMPERATURE: -20°C~85°C

旧料号: DP.02.22-03-6004

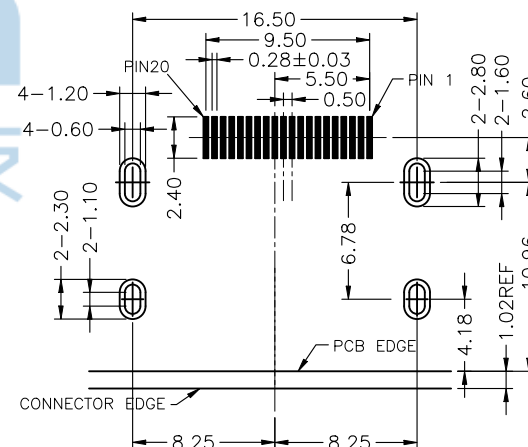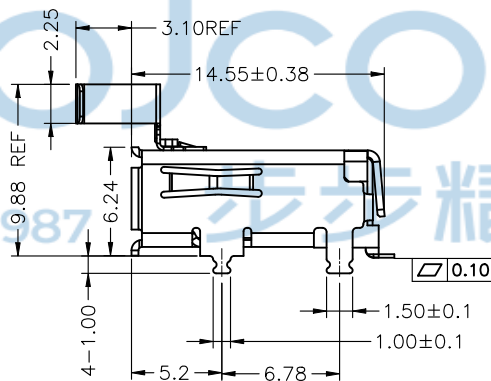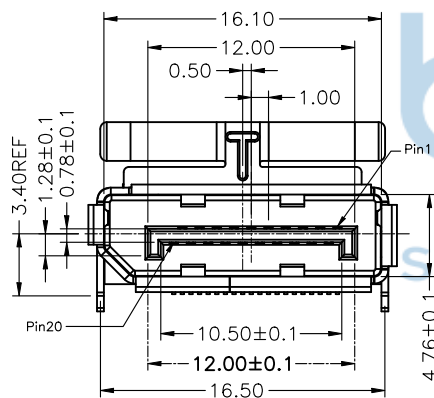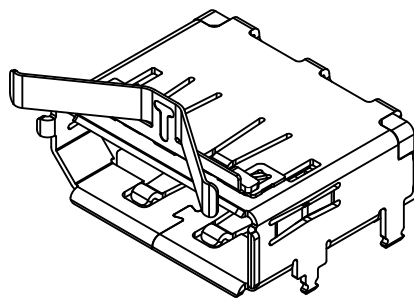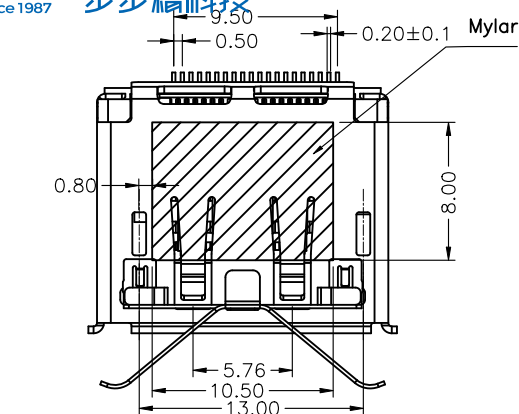

RECOMMENDED P.C.B. LAYOUT (PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW (TOLERANCE: ±0.05)


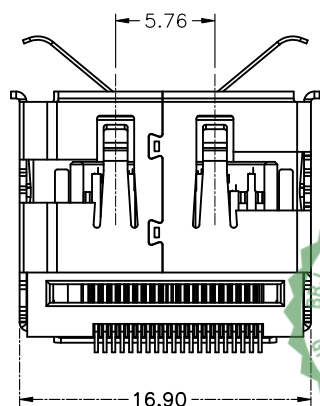


NO.	DESCRIPTION	MATERIAL	QTY.	REMARK
③	SHIELD	SUS	1	Ni PLATED
②	CONTACT	H62	20	15u"Au /Sn PLATED
①	HOUSING	LCP	1	UL94V-0 / COLOR:BLACK




THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG NO: XX

深圳市步步精科技有限公司			
NAME:	DP 弹片款/脚长1.0/无柱/有LOGO		
PJ. NO.:	158-221-200008-00G	SIZE: A4	DRW NO.: CC23-0007
FINISH:	SEE NOTES	MAT'L:	SEE NOTES
SCALE:	N/A	REV.:	A0
UNIT:	mm	PAGE:	1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2022 11/08	

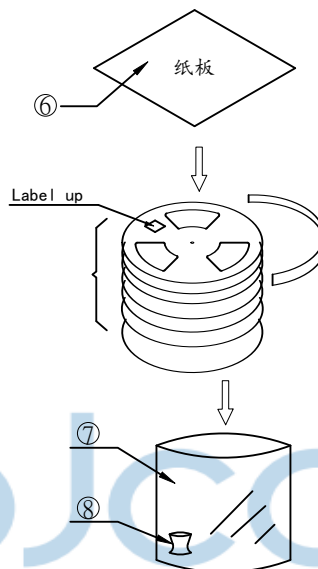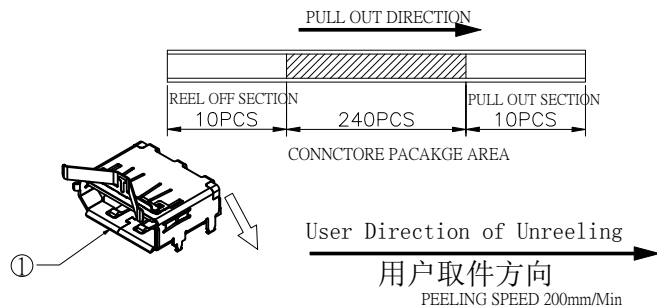

- 一、包装方式:
每料盘封装240PCS产品(图1), 10盘(叠放方式见图2)
装一箱(图3)。
- 二、包装数量:
240pcsX10盘=2400pcs
- 三、产品单重:2.28g, 净重5.472Kg, 包装材料毛重4.6Kg, 总重
10.072±1Kg。
- 四、存储条件: 温度-40℃~85℃ 湿度<85%RH
- 五、我司保存期限: 6个月
- 六、料件使用期限: 12个月
- 七、最小包装以及外包装箱都应有RoHS标签或标识。

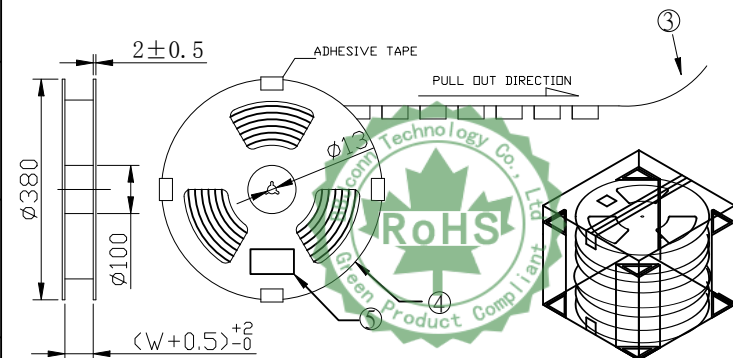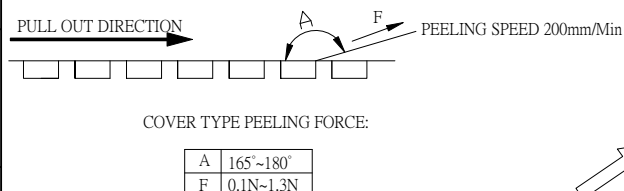

图二

图三

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 9999-9		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" X'X': ±1"		NAME: DP 普通平口款/脚长1.4/无柱	
	APPD.	JM_Zheng			PJ. NO.: 158-221-200008-00G		
	CHKD.	HongGuang			SIZE: A4	DRW NO.: CC23-0007	
			FINISH: SEE NOTES		MAT'L.: SEE NOTES		
DR.		LYX		SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/