
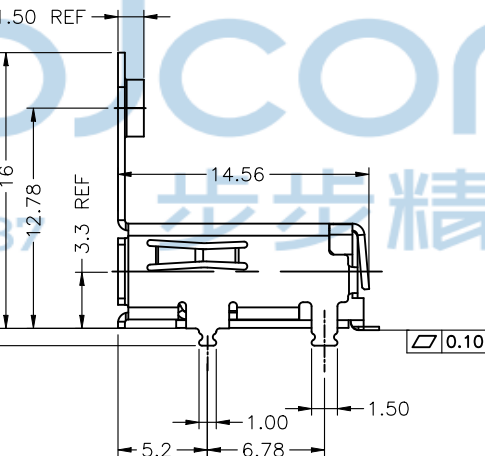
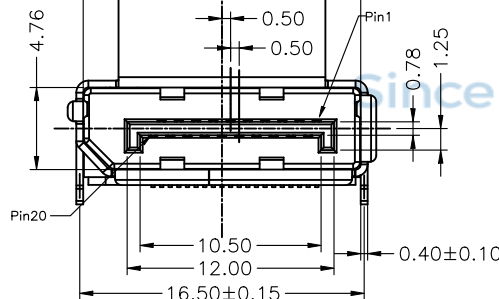
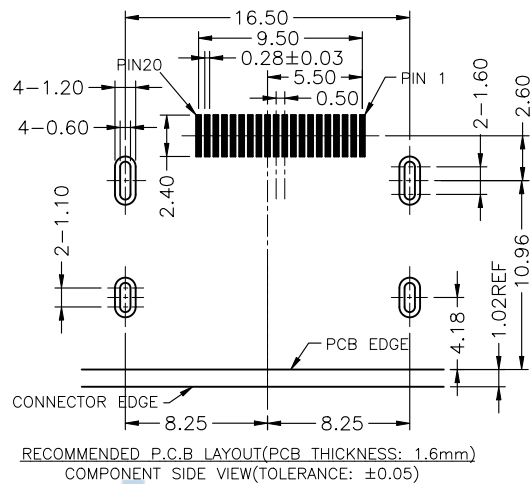


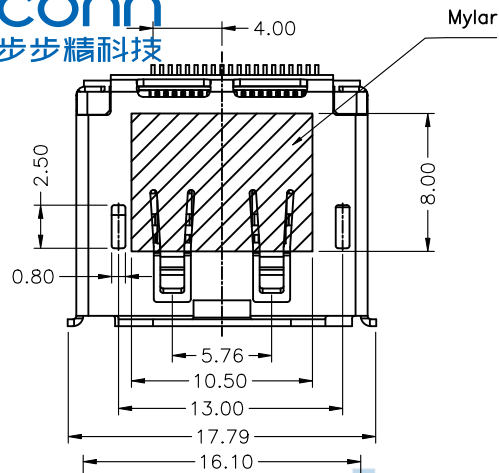

NOTE:

1. Electrical:

- 1.1 RATING CURRENT: 0.5A;
- 1.2 RATING VOLTAGE: 40V;
- 1.3 CONTACT RESISTANCE: 30 mΩ MAX.;
- 1.4 INSULATION RESISTANCE: 100MΩ MIN.;
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE


2. Mechanical:

- 2.1 Mating Force: 4.5Kgf Max.;
- 2.2 Unmating Force: 1.0~4.0Kgf;
- 2.3 DURABILITY: 10000 CYCLES.

3. Environmental



- 3.1 OPERATING TEMPERATURE: -20°C~85°C

旧料号: DP.02.22-03-6007

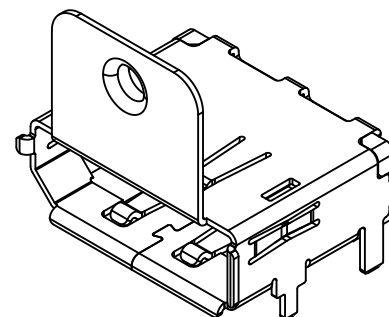


③	SHIELD	SUS	1	Ni PLATED
②	CONTACT	H62	20	15u"Au /Sn PLATED
①	HOUSING	LCP	1	UL94V-0 / COLOR:BLACK
NO.	DESCRIPTION	MATERIAL	QTY.	REMARK

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG:NO:XX		深圳市步步精科技有限公司		NAME: DP FLANGE款/脚长1.0/无柱	
.X: ±0.38 .XX: ±0.30 .XXX: ±0.25		X*: ±3* X*: ±1* XX*: ±1*		PJ. NO.: 158-221-200011-00G	
APPD. JM_Zheng2023/08/08		CHKD. DAX 2023/08/08		DR. King 2023/08/08	
FINISH: SEE NOTES		MAT'L: SEE NOTES		SCALE: N/A	
REV.: A0		UNIT: mm		PAGE: 1/2	

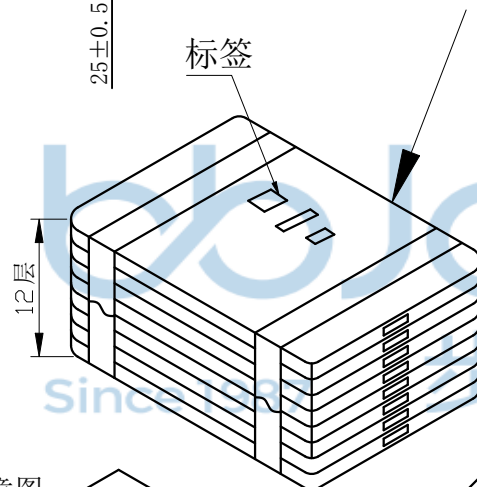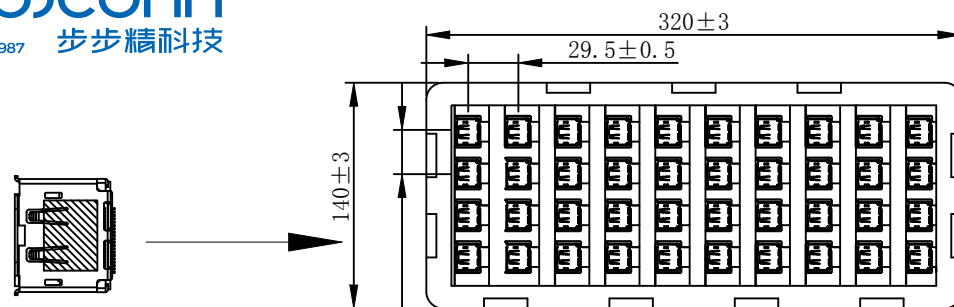

包装盒叠放示意图

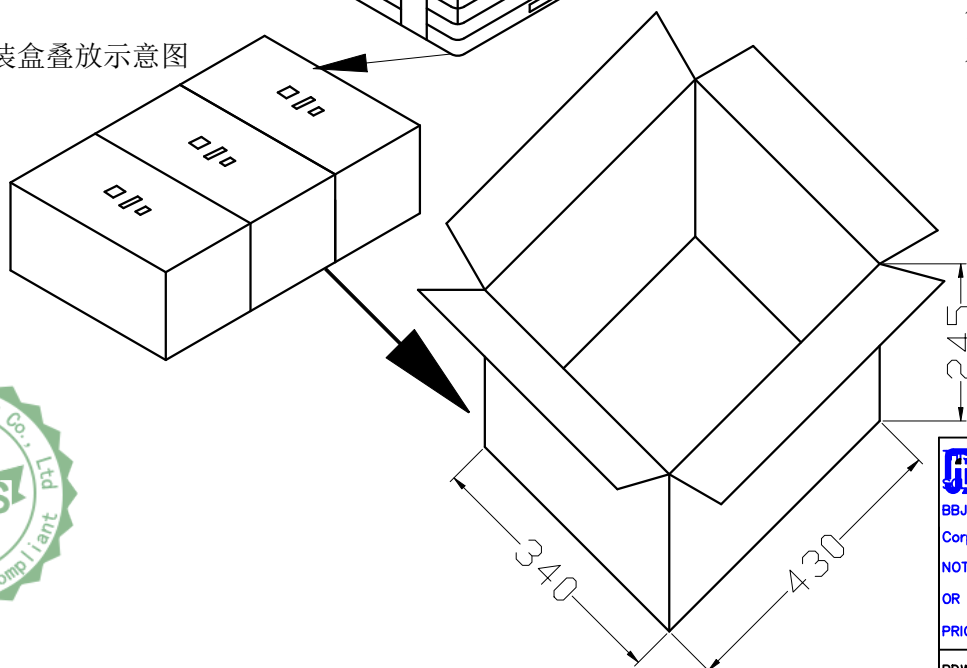

塑盒使用:

- 一、单层吸塑盒: 4X10=40PCS.
- 二、中包装(12层吸塑盒为一中包装, 上下各垫一个纸板, 两端用胶带捆好.): 40X12=480PCS
- 三、每12层吸塑盒捆一中包装, 每层吸塑盒上盖上一个盖子, 每中包装最上层表面贴标签、条码等, 3中包装装入下面大箱内。
- 四、纸箱: 480X3=1440PCS
- 五、产品单重: 2.66 g, 产品净重: 3.83Kg, 纸箱吸塑盒 3.3Kg, 毛重: 7.13±1Kg.
- 六、存储条件: 温度-40℃~85℃ 湿度<85%RH
- 七、我司保存期限: 6个月
- 八、料件使用期限: 12个月
- 九、中包装以及外包装箱都应有RoHS标签或标识。



DOCUMENT IS THE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
PJ. NO.: 158-221-200011-00G		SIZE: A4 DRW NO.: CC23-0010		FINISH: SEE NOTES MAT'L.: SEE NOTES		SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2	
NAME: DP FLANGE款/脚长1.0/无柱		APPD. JM_Zheng		CHKD. HongGuang		DR. LYX	
PJ. NO.: 158-221-200011-00G		SIZE: A4 DRW NO.: CC23-0010		FINISH: SEE NOTES MAT'L.: SEE NOTES		SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2	