







REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

MATERIALS

- 1.HOUSING:L.C.P, (UL 94V-0), BLACK
- 2.TERMINAL:BRASS (C2680),
GOLD PLATING 1u" Min. ON CONTACT AREA,
MATTE TIN 80u" Min. PLATING ON SOLDER TAIL,
UNDER NICKEL PLATING 50u" Min OVER ALL.
- 3.SHELL:S50C/BRASS(C2680), NICKEL PLATING 50u" Min.

SPECIFICATION

- 1.CURRENT RATING : 0.5 A MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S.
FOR ONE MINUTE.
- 3.INSULATION RESISTANCE : 100M OHMS MIN.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. INSERTION FORCE : 4.5kgf MAX.
7. EXTRACTION FORCE : 1.0~4.0kgf MIN.
8. SALT SPRAY : 24 HOURS PASS.
9. REFLOW SOLDERING(SMD COMPONENT) OVEN
- 10.TEMPERATURE:260°C.5SEC

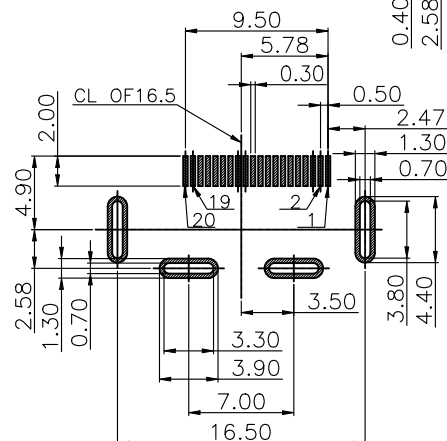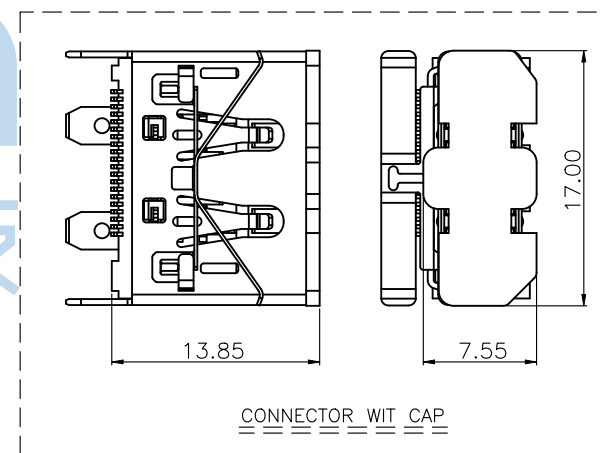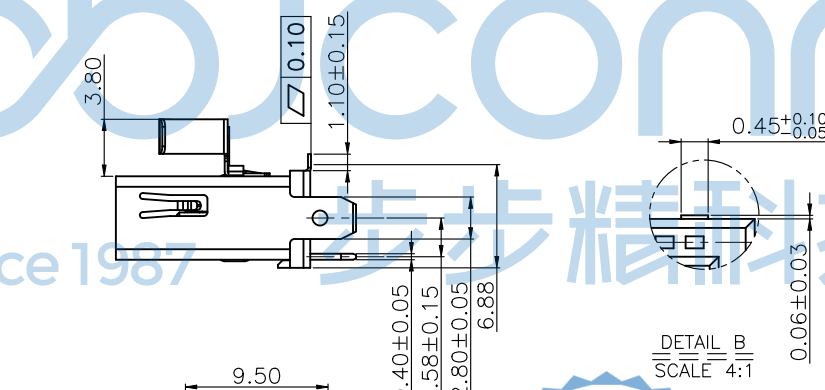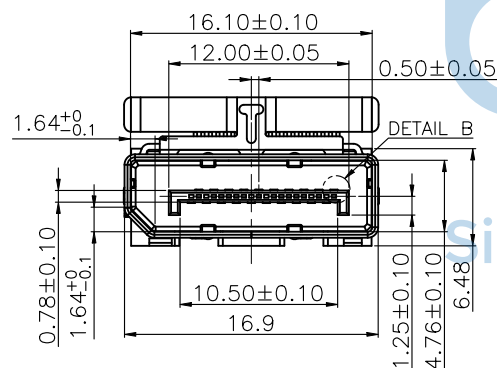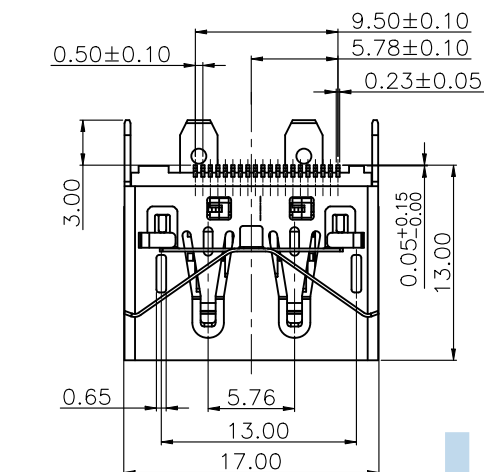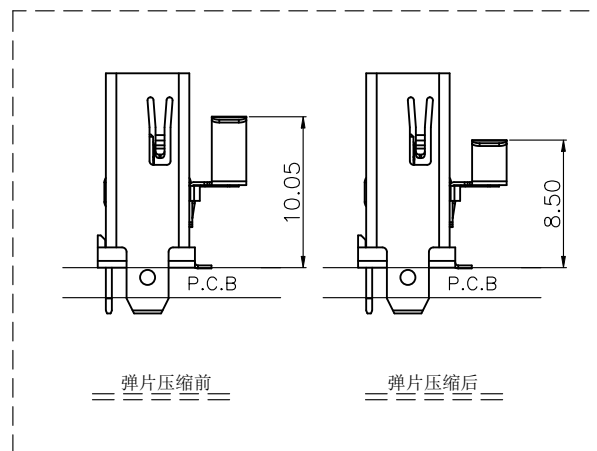



RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCE: ±0.05







THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0470-1

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长3.0 正向弹片 H=13.0 平口 铜壳 编带	
APPD. JM_Zheng		PJ. NO.: 158-224-200006-U4G	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

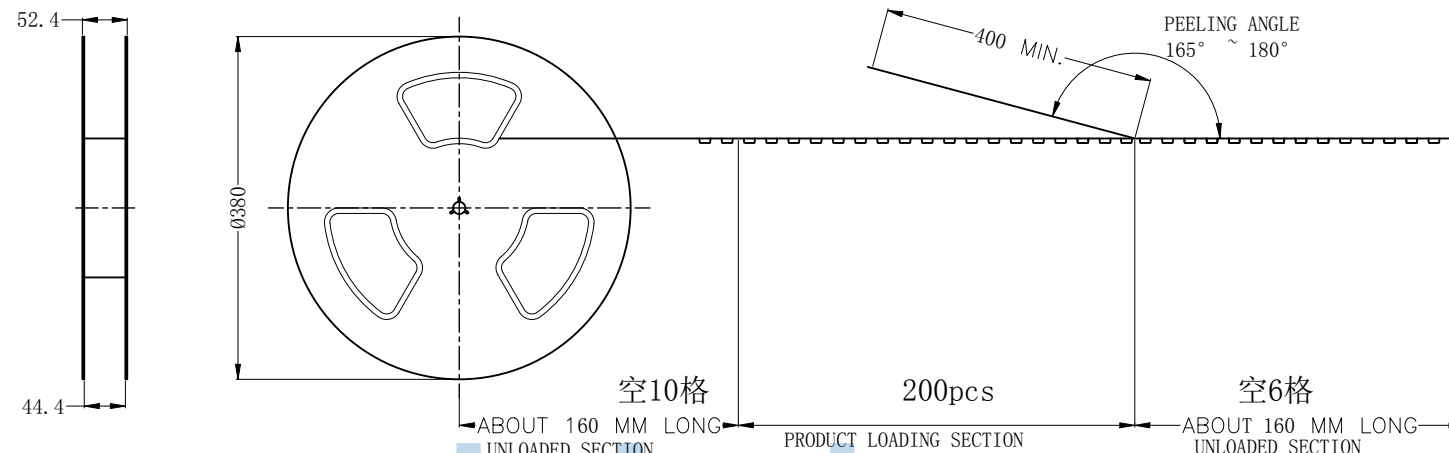


8 REELS

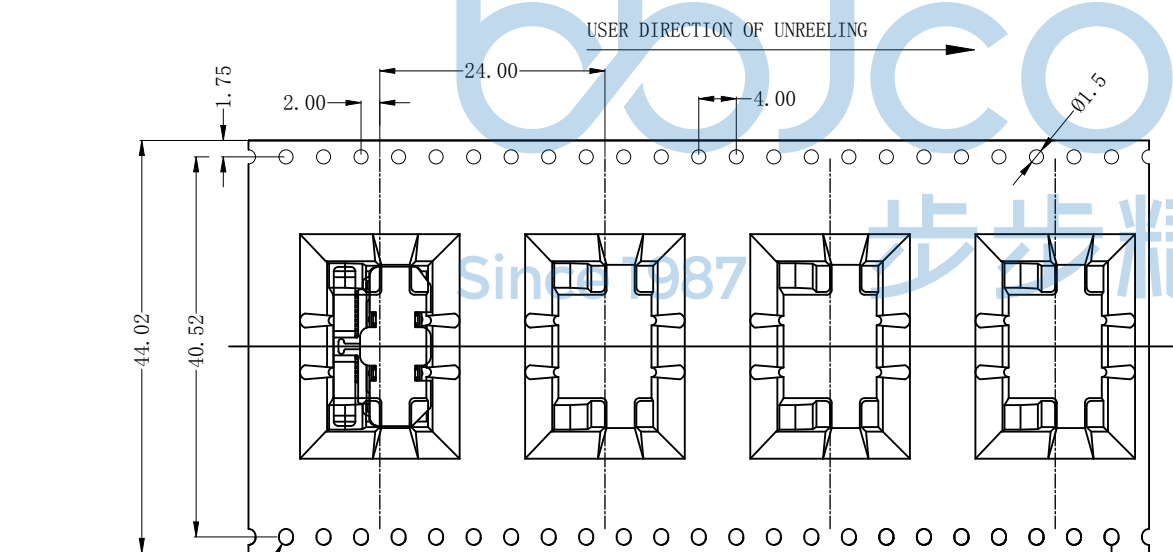

SEE DETAIL 1



DETAIL 1
4:1

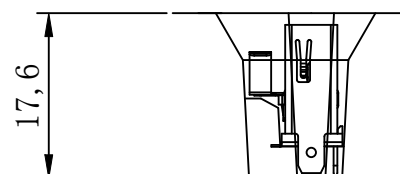

PACKAGE

1. SIZE :

REEL : DIA. = 38.0mm

CORTON(外箱) : 400x400x400mm (LxWxH)

2. QUANTITY :

200 PCS/REEL (卷)

8 REELS/CARTON : 1600PCS

(8卷/箱:1600PCS)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0470-1	DR. TSP	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"
APPD. JM_Zheng	CHKD. LYX	NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长3.0 正向弹片 H=13.0 平口 铜壳 编带	PJ. NO.: 158-224-200006-U4G
		FINISH: SEE NOTES	SCALE: N/A
		MAT'L.: SEE NOTES	REV.: A0
		UNIT: mm	PAGE: 2/2