


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

MATERIALS





1. HOUSING : L.C.P, (UL 94V-0), BLACK
2. TERMINAL : BRASS (C2680),
GOLD FLASH PLATING ON CONTACT AREA,
MATTE TIN PLATING ON SOLDER TAIL,
UNDER NICKEL PLATING OVER ALL.
3. SHELL : S50C/ BRASS(C2680), NICKEL PLATING

SPECIFICATION


1. CURRENT RATING : 0.5 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. INSERTION FORCE : 4.5kgf MAX.
7. EXTRACTION FORCE : 1.0~4.0kgf MIN.
8. SALT SPRAY : 24 HOURS PASS.

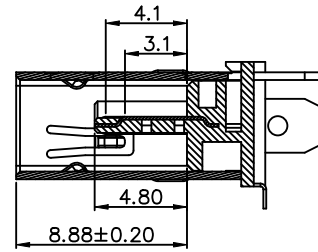

SEC.A-A
VIEW ROTATE 90°


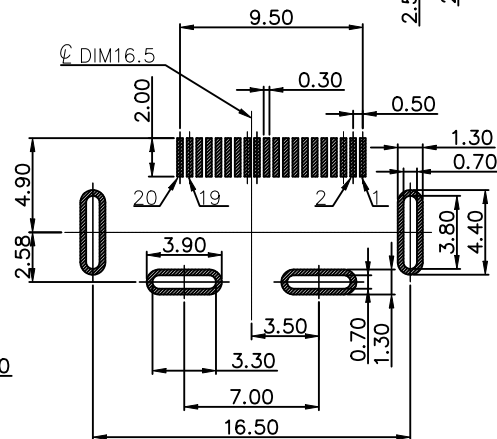
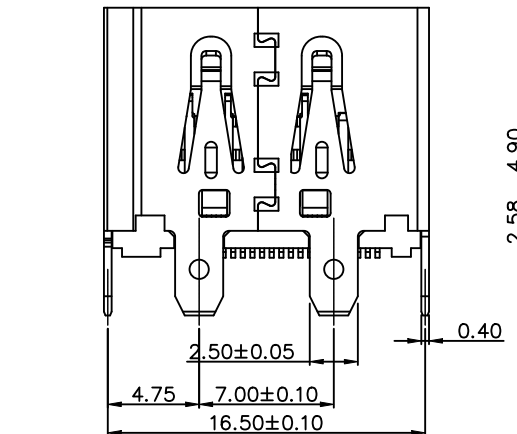
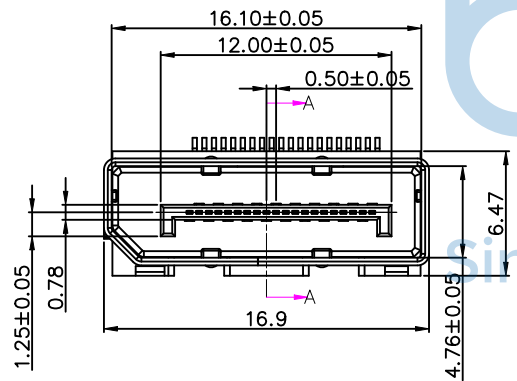
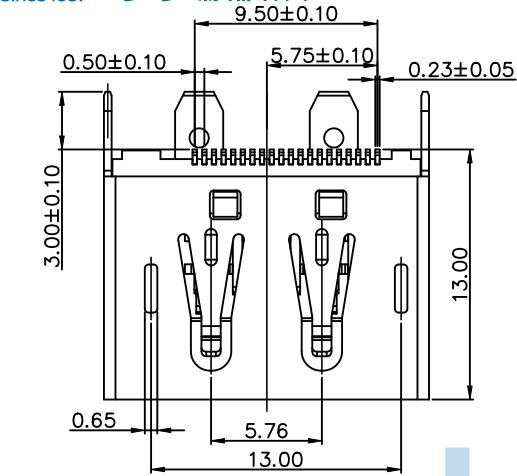


RECOMMEND P.C.B. LAYOUT(TOP VIEW)
(P.C.B THICKNESS=1.60mm)

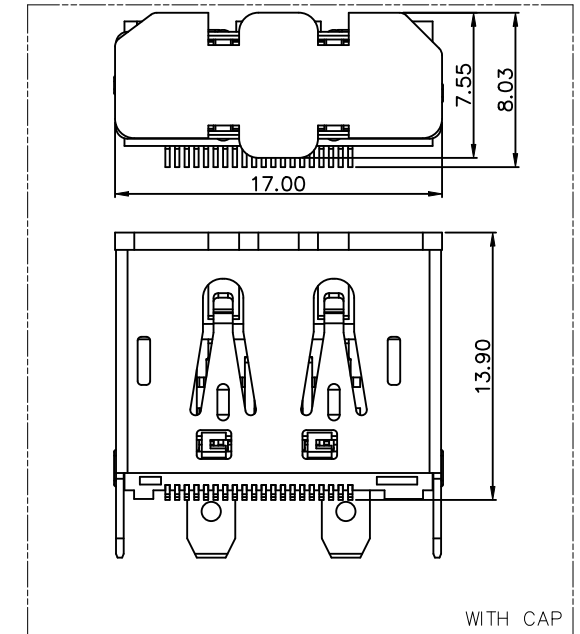


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0470-1

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3° .X': ±2° .XX': ±1°	NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长3.0 无弹片 H=13.0 平口 铜壳 编带	
APPD.	JM_Zheng	P.J. NO.: 158-226-200001-U4G	
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

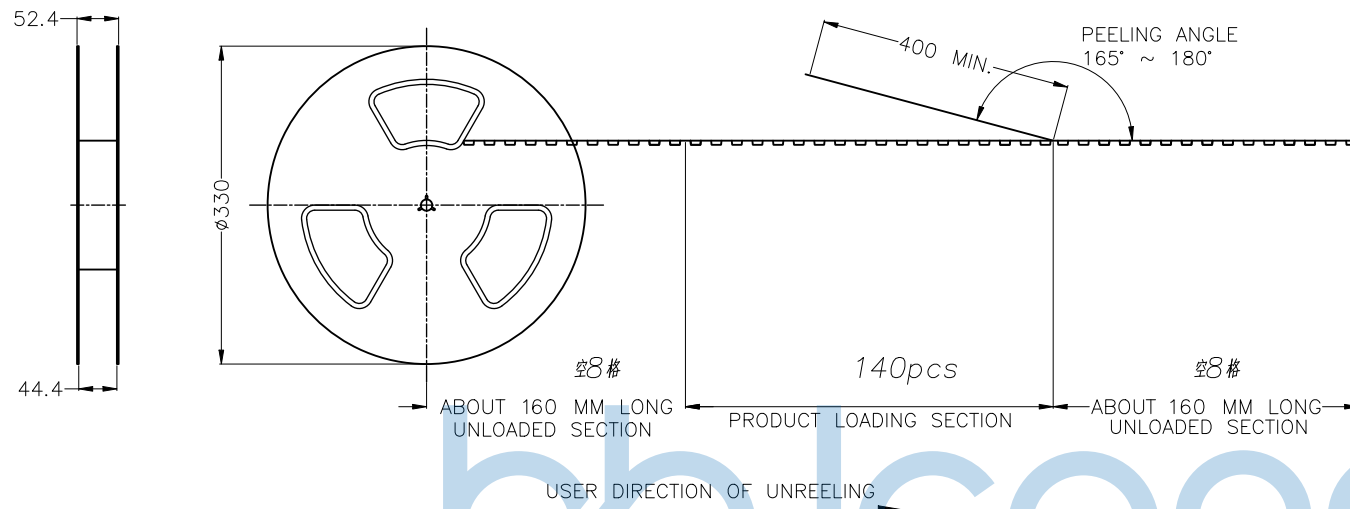


PACKAGE

- SIZE :
REEL : DIA.=330mm
CORTON(外箱) : 350x350x450mm (LxWxH)
- QUANTITY :
140 PCS/REEL(卷)
9.REELS/CARTON : 1260PCS
(9卷/箱 1260PCS)

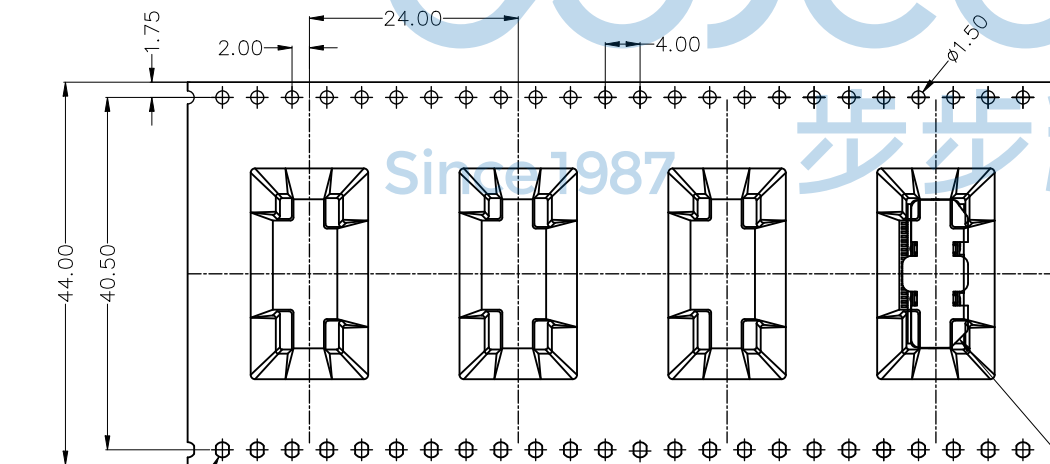

请注意“C”角方向

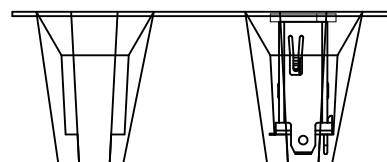

THIS DOCUMENT IS THE SOLE PROPERTY OF BBjconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长3.0 无弹片 H=13.0 平口 铜壳 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° .X*: ±2° .XX*: ±1°	APPD.	JM_Zheng	PJ. NO.: 158-226-200001-U4G	SIZE: A4 DRW NO.:
CHKD.	LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES		
DR.	TSP	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/2
PDWG.NO: 0470-1					