
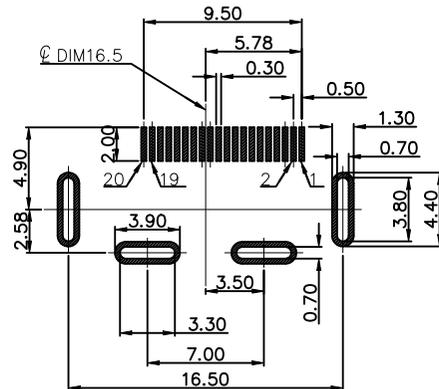





REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

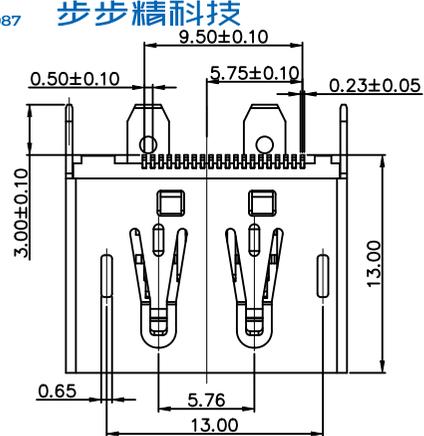



RECOMMEND P.C.B. LAYOUT(TOP VIEW)
(P.C.B THICKNESS=1.60mm)

- NOTES:
 1.ELECTRONIC:
 CURRENT RATING : 0.5 A MAX.
 CONTACT RESISTANCE: 30mohm MAX
 INSULATION RESISTANCE: 100 Mohm MIN
 WITHSTAND VOLTAGE: AC 500V,1min.
 2.MECHANICAL:
 DURABILITY: 10000 CYCLE.
 3.ENVIRONMENT CHARACTERISTICS:
 OPERING TEMPERATURE: -55°C TO +105°C
 4.MATERIAL LIST:





No.	PART NAME	QTY	MATERIAL	REMARK
4	SHELL	1	COPPER ALLOY T=0.40	NI PLATED
3	CONTACT	20	COPPER ALLOY T=0.20	AU/SN PLATED
2	CAP	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLACK
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLACK

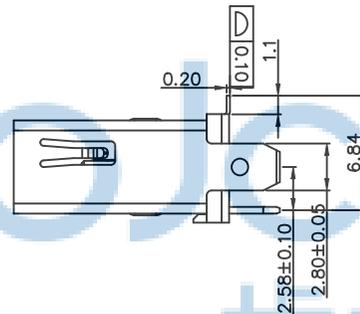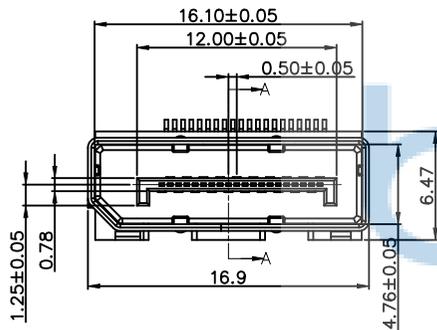

SEC.A-A

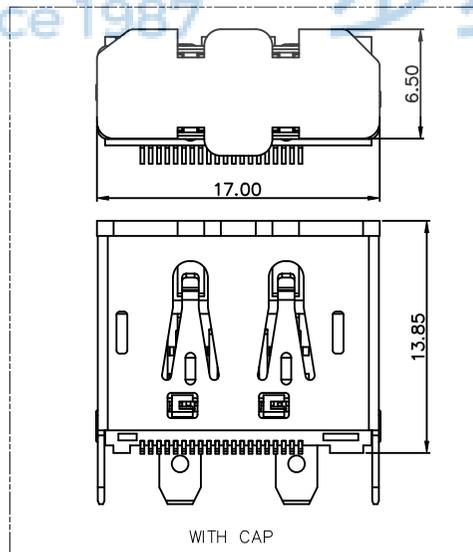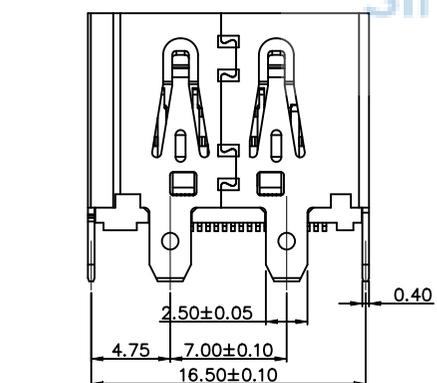

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0409-1		深圳市步步精科技有限公司 .X: ±0.38 X: ±3* .XX: ±0.25 .X: ±2* .XXX: ±0.13 .XX: ±1*		NAME: DP 20P 母座 直立式 四脚插 H=13.0 端子SMT 平口 LCP黑胶 铜壳 APPD. JM_Zheng CHKD. LYX DR. TSP	
		P.J. NO.: 158-224-200001-H5G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2			

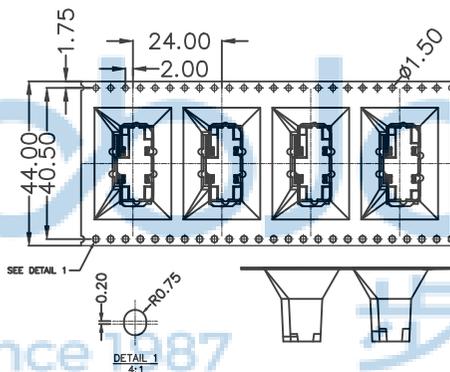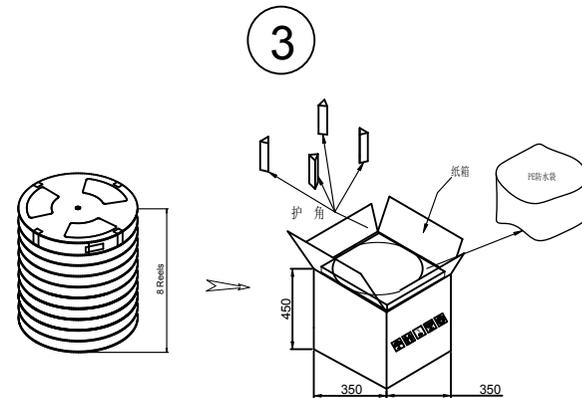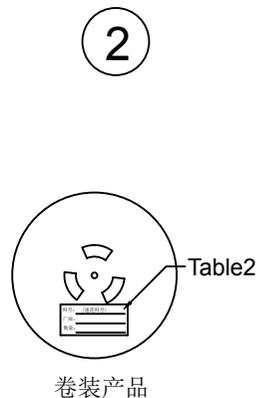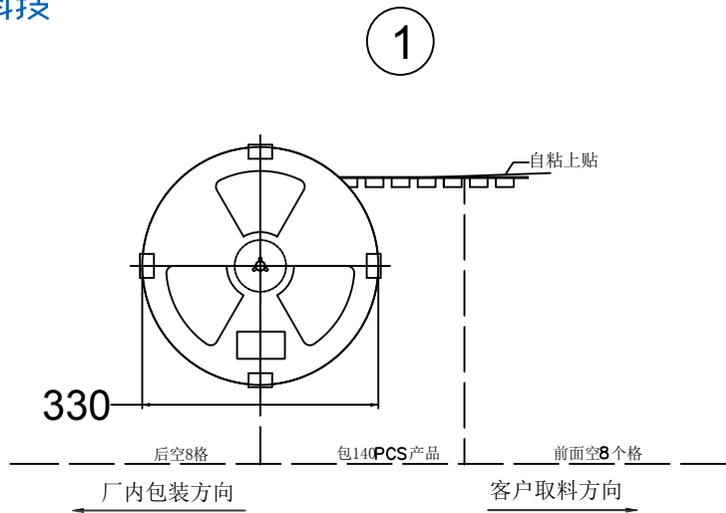

料号: _____
厂商: _____
数量: _____

2 每卷贴上内标签 (如图如示)

3-1. 将9盘装入PE胶袋,再放入纸箱中。
3-2. 纸箱4个角落用缓冲材料塞好,并盖上与之相配的纸板
备注: 纸箱的规格: 350*350*450mm
3-3. 包装明细:

盘/每箱	PCS/每盘	PCS/每箱
9盘/每箱	140PCS/每盘	1260PCS/每箱

备注:
1. 载带材质: PET 透明
2. 盖带材质: PET 透明料
3. 载带所有公差±0.08以内,
检验实配可顺利放入无干涉。



5-1. 外标签贴在外箱侧左上角, 环保标签贴在外箱侧右上角。



4-1 纸箱开口处以透明胶带贴合。
4-2 若有未装满的零数箱, 必须以缓冲材塞
4-3. 产品外包装标签贴法: (如上图)。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: DP 20P 母座 直立式 四脚插 H=13.0 端子SMT 平口 LCP黑胶 铜壳	
APPD.	JM_Zheng	P.J. NO.: 158-224-200001-H5G SIZE: A4 DRW NO.:	FINISH: SEE NOTES MAT'L.: SEE NOTES
CHKD.	LYX		
PDWG.NO:	0409-1	DR.	TSP
		SCALE: N/A	REV.: AO UNIT: mm PAGE: 2/2