






NOTE:

1.ELECTRICAL CHARACTERISTICS;

- 1.1 Rated current : 5.0 A
- 1.2 Voltage rating : 5V AC
- 1.3 CONTACT RESISTANCE: 40mΩ Max.;
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC For 1 Minute;
- 1.5 INSULATION RESISTANCE:100MΩ Min.;
- 1.6 OPERATING TEMPERATURE: -40°C ~ +85°C

2.MECHANICAL CHARACTERISTICS:


- 2.1 MATING FORCE: 5~20 N.
- 2.2 UNMATED FORCE: 8~20N
- 2.3 DURABILITY: 10,000 CYCLES

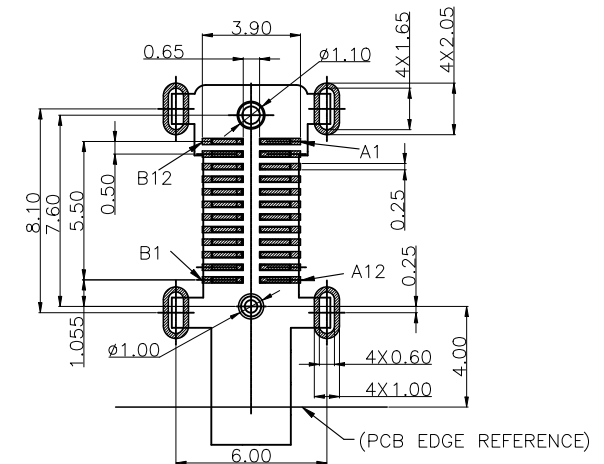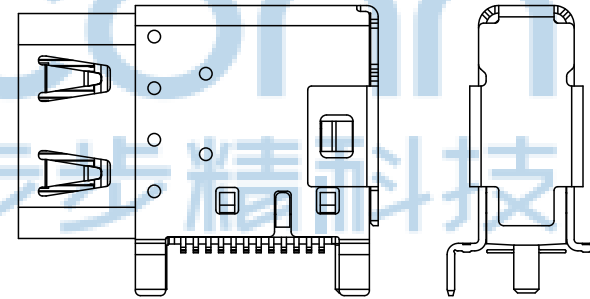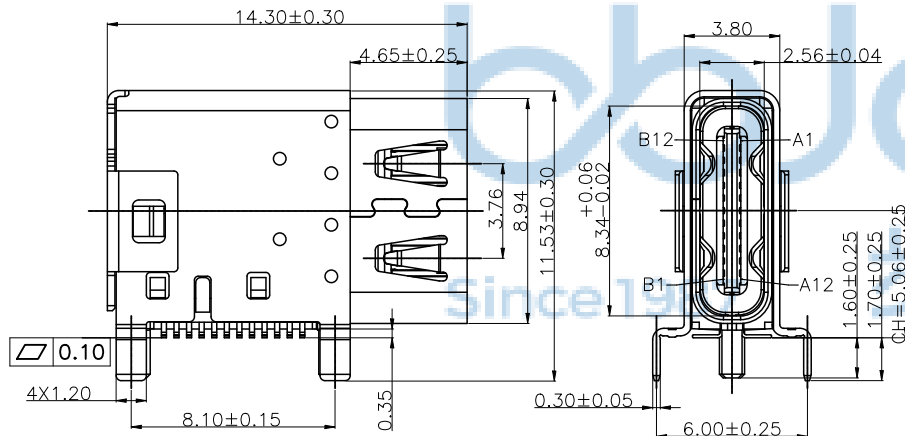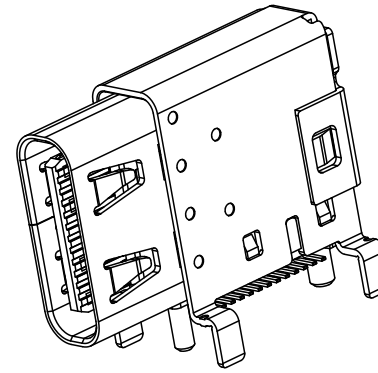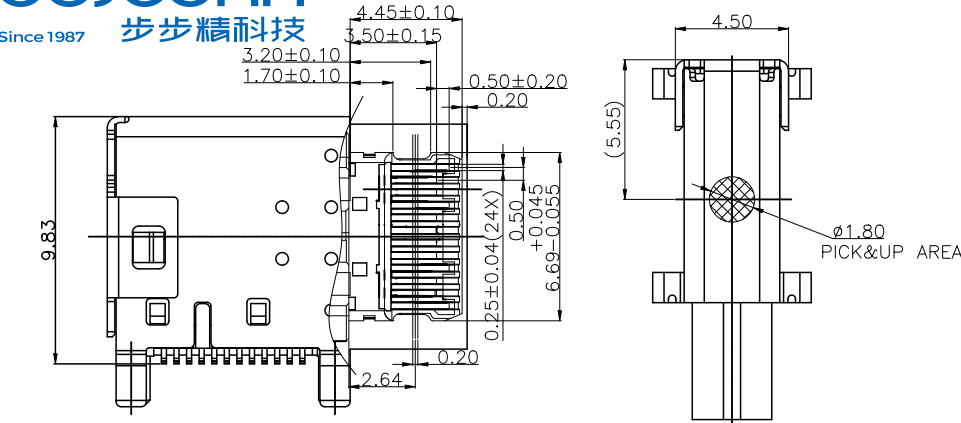

RECOMMENDED P.C.B LAYOUT
TOLERANCE ± 0.05mm (TOP VIEW)

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

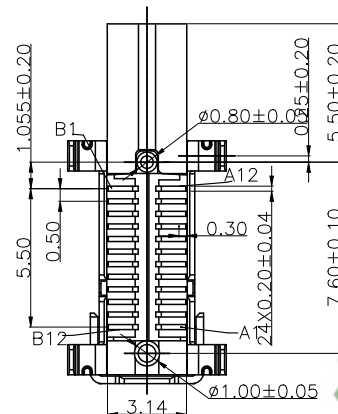






Item	Title	Material	Dispose	Q'TY
1	Out Shell	SUS304	Ni:50u" Min.	1PCS
2	Inner Shell	SUS304	Ni:50u" Min.	1PCS
3	Mid Plate	SUS301	NA	1PCS
4	Main Housing	LCP	UL 94V-0 Black	1PCS
5	TERMINAL	C7025&C18400	Au 3u"min IN CONTACT AREA+ G.F(SOLDER TAIL) 50u" NICKEL OVERALL.	24PCS

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0900-1


深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: U4 40G速率 TYPE-C 24P 母座 侧插 双壳 四脚插带柱 SMT L=14.3 CH5.06 镀金3U
APPD JM_Zheng	CHKD LYX	PJ NO: 126-221-240010-J8G
DR SGF	SCALE:N/A	SIZE:A4
	REV:A0	DRW NO:
	FINISH:SEE NOTES	MAT'L:SEE NOTES
	UNIT:mm	PAGE:1/2

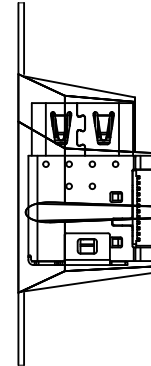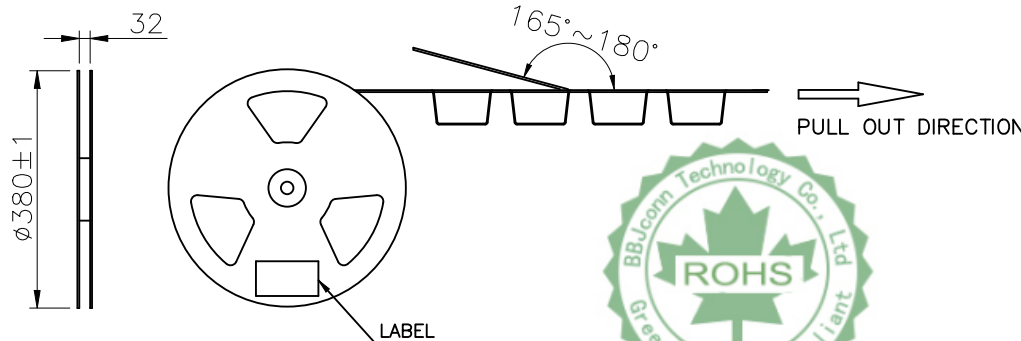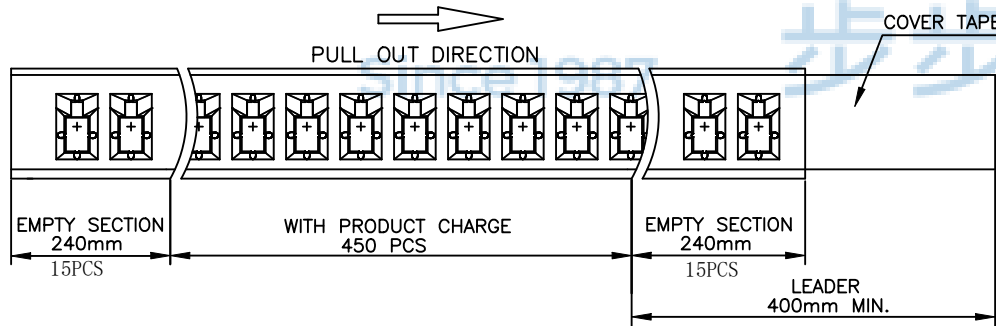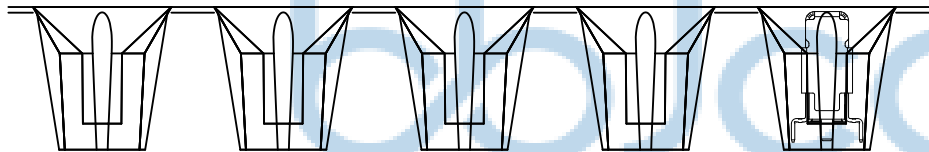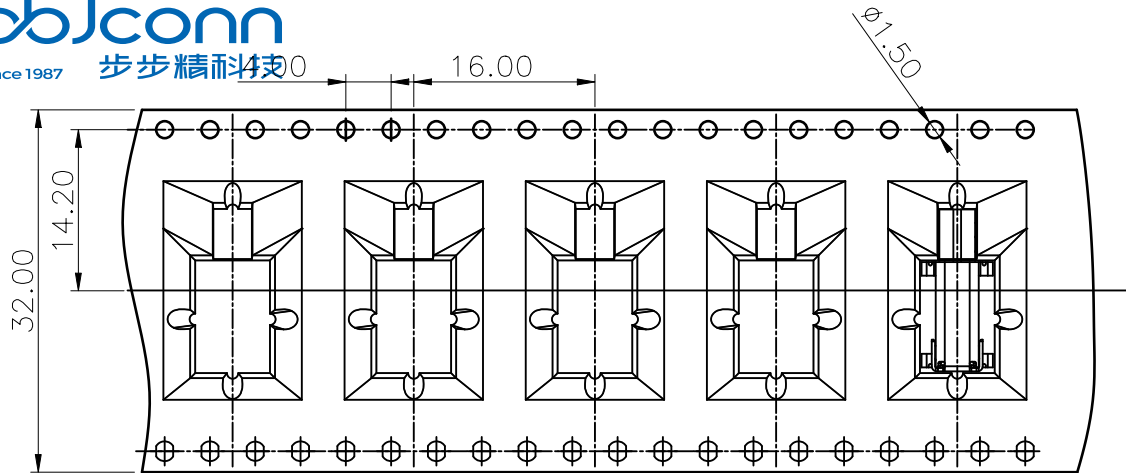

PACKAGE

1. SIZE :
REEL : $\phi 380 \times 32$ mm
CARTON : $400 \times 400 \times 325$ mm (LxWxH)
2. QUANTITY :
450 PCS / REEL
8 REEL / CARTON = 3,600 PCS

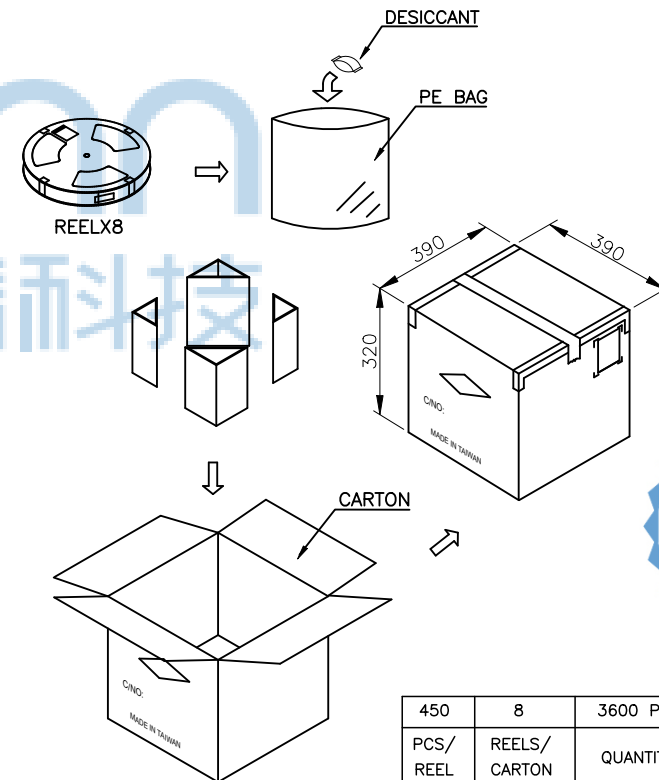

450	8	3600 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0900-1

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$ X'X': $\pm 1'$		NAME: U4 40G速率 TYPE-C 24P 母座 侧插 双壳 四脚插带柱 SMT L=14.3 CH5.06 镀金3U	
APPD	JM_Zheng	PJ NO: 126-221-240010-J8G		SIZE:A4 DRW NO:	
CHKD	LYX	FINISH:SEE NOTES		MAT'L:SEE NOTES	
DR	SGF	SCALE:N/A		REV:A0	
		UNIT:mm		PAGE:2/2	