



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES/注释:




- MATERIAL/材料: SEE TABLE/见下表
- GENERAL SPECIFICATION/通用特性:
 - COPLANARITY/共面度: 0.10 Max.
 - CURRENT RATING: 5A/ 额定电流: 5安培
 - CONTACT RESISTANCE: 40mΩ MAX (INITIAL).
INSULATION RESISTANCE: 100MΩ Min
接触电阻: 40毫欧最大(初始值) / 绝缘电阻: 100MΩ Min
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
耐电压: 100伏交流
 - MECHANICAL CHARACTERISTICS:
INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
力学特性: 初始插入力: 5~20N 拔出: 8~20N
耐久后拔出: 6~20N

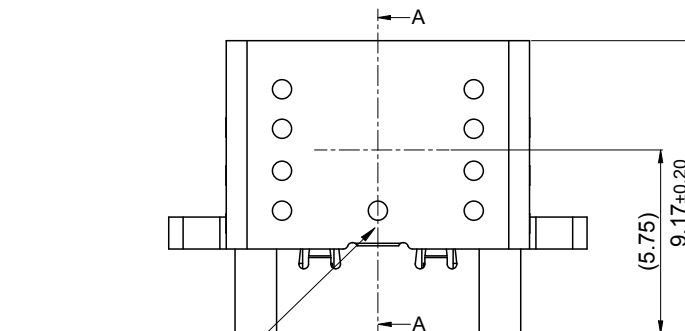

LASER WELD AREA

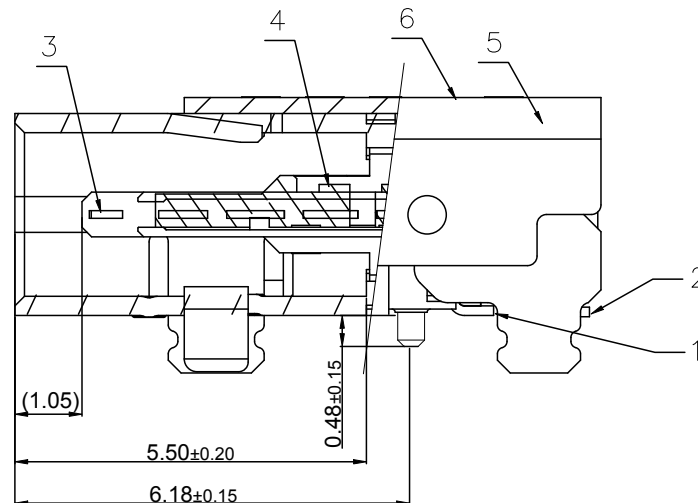



SECTION A-A(剖视图A-A)
SCALE 2:1 (比例 2:1)

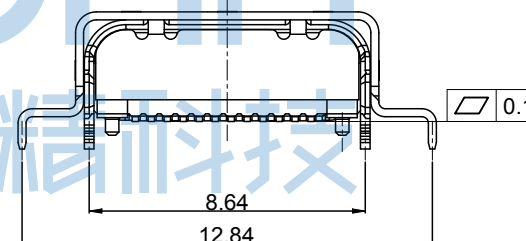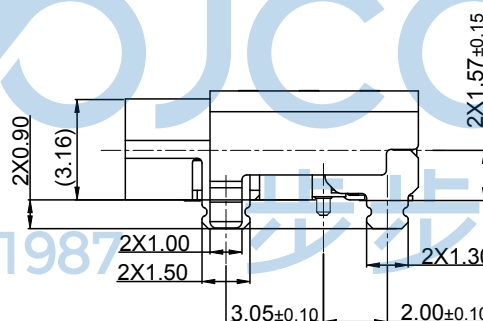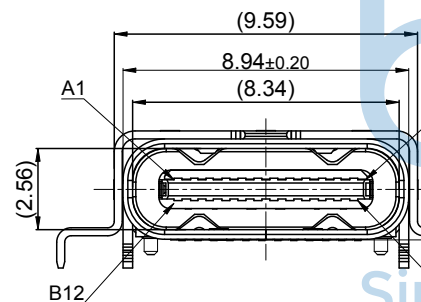

MATED CONDITION(REF.)

Pin定义:


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND

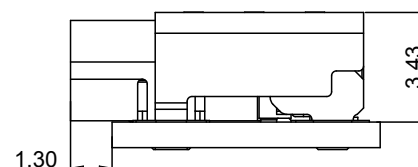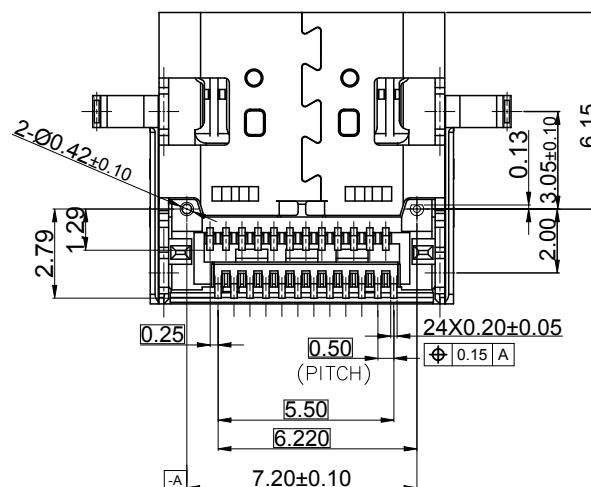

MOUTING CONDITION(REF.)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG,NO:	0470-1	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" X'': ±2" XX': ±1"
APPD.	JM_Zheng	NAME: U4 40G速率 TYPE-C 24P 母座 有后盖双壳 六脚 插脚长0.90带柱 双排SMT 沉板0.13 L=9.17 CH1.57 编带	
CHKD.	LYX	PJ. NO.: 126-223-240008-U4G	
DR.	TSP	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3	

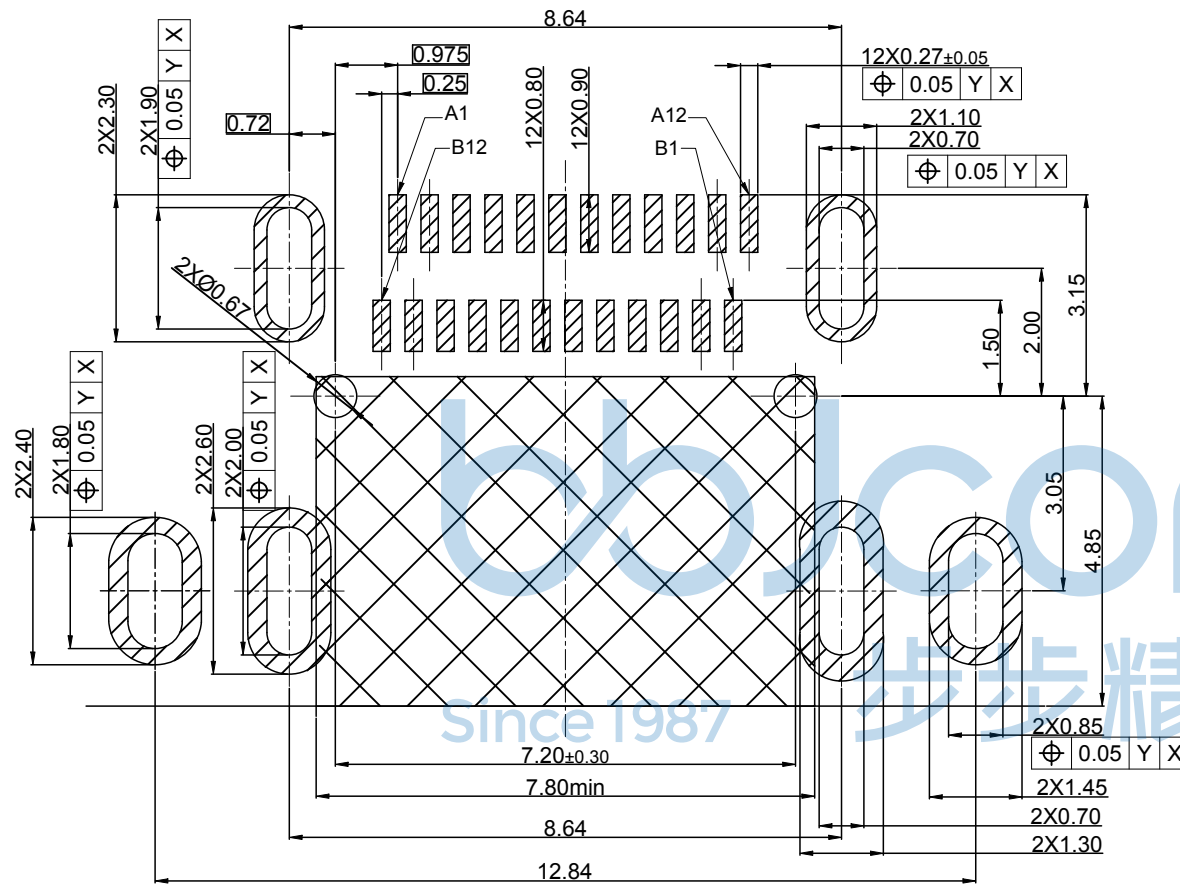

Recommended PCB Layout(Top View)/ 推荐的PCB布局(前视图)
General Tolerances:±0.05/ 一般公差:±0.05





6	OUT SHELL	1	SUS304	30U" NICKEL PLATING	0.25mm
5	INT SHELL	1	SUS304	30U" NICKEL PLATING	0.3mm
4	MAIN HOUSING	1	HIGH TEMPERATURE	PA9T BLACK	UL94V-0
3	MID PLATE	1	SUS301	RINSE	0.15mm
2	BOTTOM TERMINAL	1	COPPER ALLOY	MATING SIDE: Au1u";	0.12mm
1	TOP TERMINAL	1	COPPER ALLOY	SOLDER TAIL: GOLD FLASH, 30u" NICKEL OVERALL.	0.12mm
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	REMARK

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ±0.38 .X": ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX": ±1"		NAME: U4 40G速率 TYPE-C 24P 母座 后有盖双壳 六脚 插脚长0.90带柱 双排SMT 沉板0.13 L=9.17 CH1.57 编带	
PDWG.NO: 0470-1		DR.	TSP	APPD. JM_Zheng	PJ. NO.: 126-223-240008-U4G
		CHKD. LYX		SIZE: A4	DRW NO.:
				FINISH: SEE NOTES	MAT'L.: SEE NOTES
				SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/3



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

19PCS EMPTY 1000PCS PRODUCTS BEGINNING PORTION 400mm MIN 19PCS EMPTY

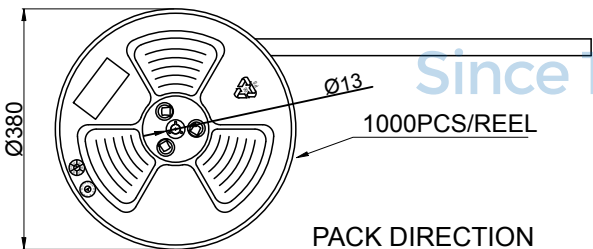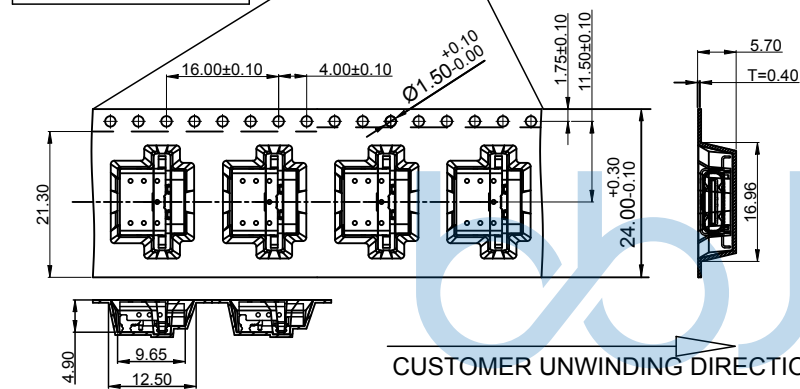


PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

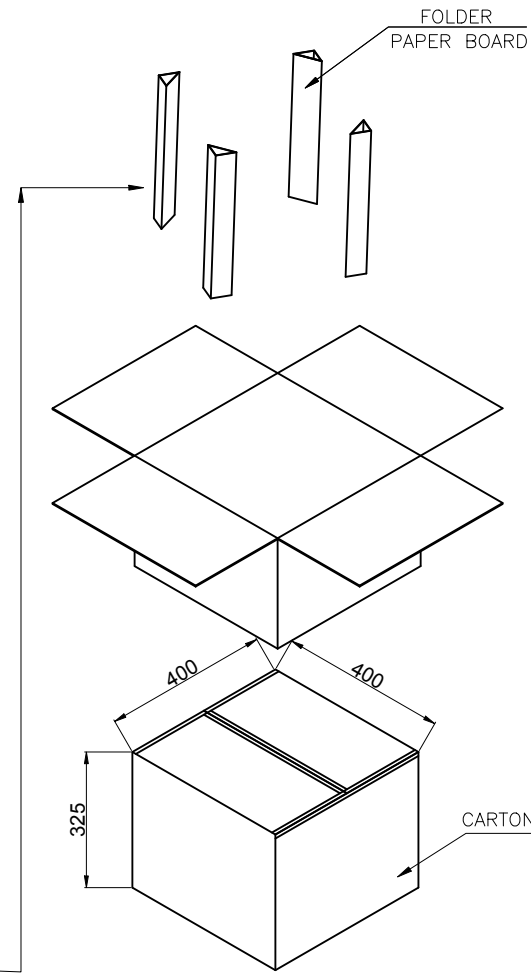

PACKING: 1. 1000 PCS/REEL.
2. 10 REEL/Carton



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0470-1		深圳市步步精科技有限公司				
		NAME: U4 40G速率 TYPE-C 24P 母座 有后盖双壳 六脚 插脚长0.90带柱 双排SMT 沉板0.13 L=9.17 CH1.57 编带				
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*			
	APPD.	JM_Zheng			PJ. NO.: 126-223-240008-U4G	
	CHKD.	LYX			SIZE: A4	DRW NO.:
	DR.	TSP	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
			SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 3/3