
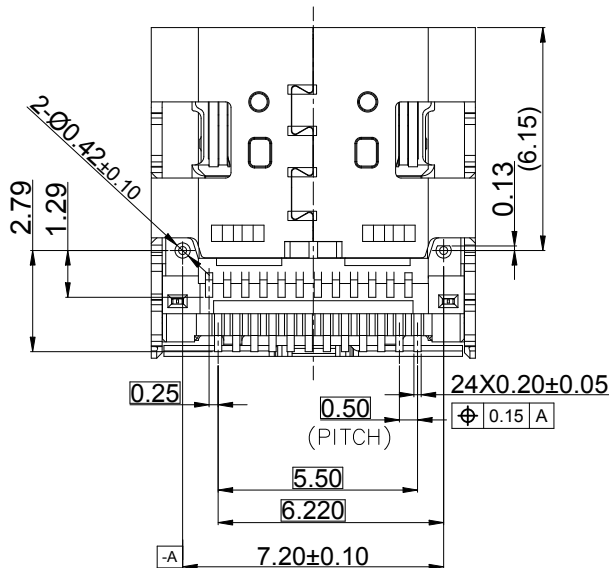
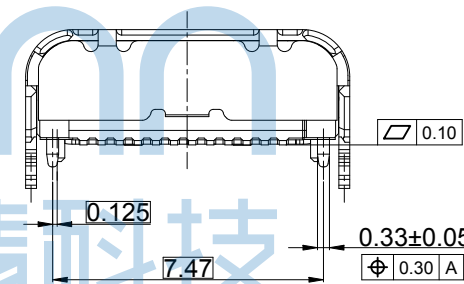
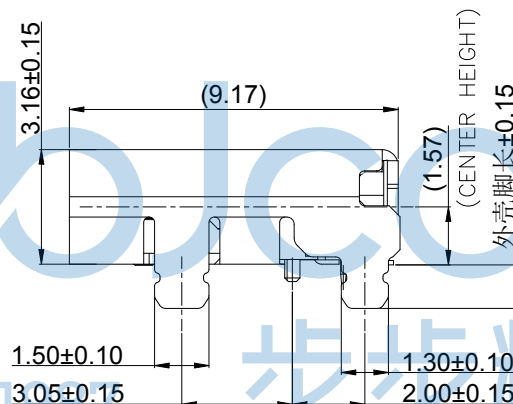
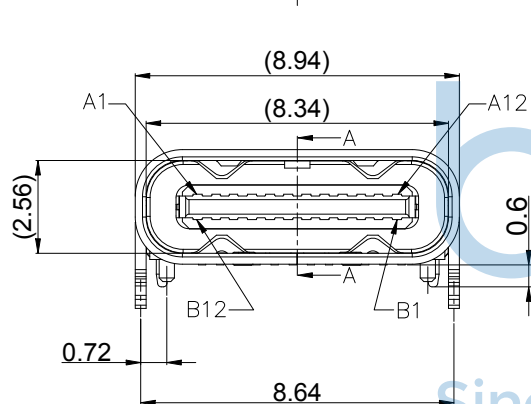
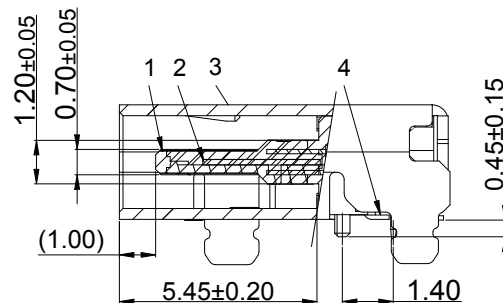


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE/注释:

1. SPECIFICATION/规格:

- 1.1 Rated current (额定电流): 5.0 A
- 1.2 Voltage rating (额定电压): 5V AC
- 1.3 Contact Resistance (接触阻抗): 40 m Ω Max.
- 1.4 Insulation Resistance (绝缘阻抗): 100MΩ Min.
- 1.5 Withstanding voltage (耐电压): 100 VAC/minute
- 1.6 Mating force (插入力): 5~20N.
- 1.7 Unmating force (拔出力): 8~20N.
- 1.8 Durability Cycle(寿命循环): 10,000 cycle
- 1.9 Operating temperature (工作温度): -40°~+85°

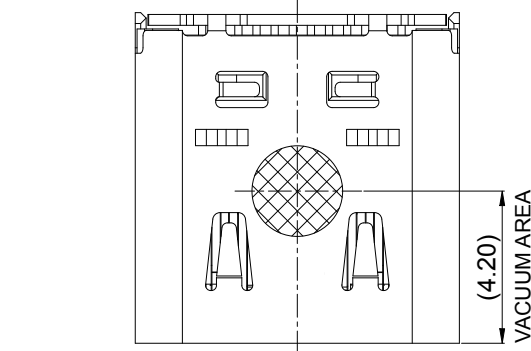

PIN ASSIGNMENT:


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND

1.60
1.20
0.90
0.60
外壳脚长

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0470-1		APPD. JM_Zheng		CHKD. LYX		DR. TSP		NAME: U4 40G速率 TYPE-C 24P 母座 有后盖 单壳 板上四脚 插 带柱 端子双排SMT 外壳脚长1.20 L=9.17 CH=1.57 编带	
.X: ±0.38		.X': ±3'		NAME: U4 40G速率 TYPE-C 24P 母座 有后盖 单壳 板上四脚 插 带柱 端子双排SMT 外壳脚长1.20 L=9.17 CH=1.57 编带		PJ. NO.: 126-221-160016-U4G		SIZE: A4 DRW NO.:		FINISH: SEE NOTES	
.XX: ±0.25		.X': ±2'		.XXX: ±0.13		.XX': ±1'		SCALE: N/A		REV.: A0	
UNIT: mm		PAGE: 1/3		MAT'L.: SEE NOTES							



深圳市步步精科技有限公司

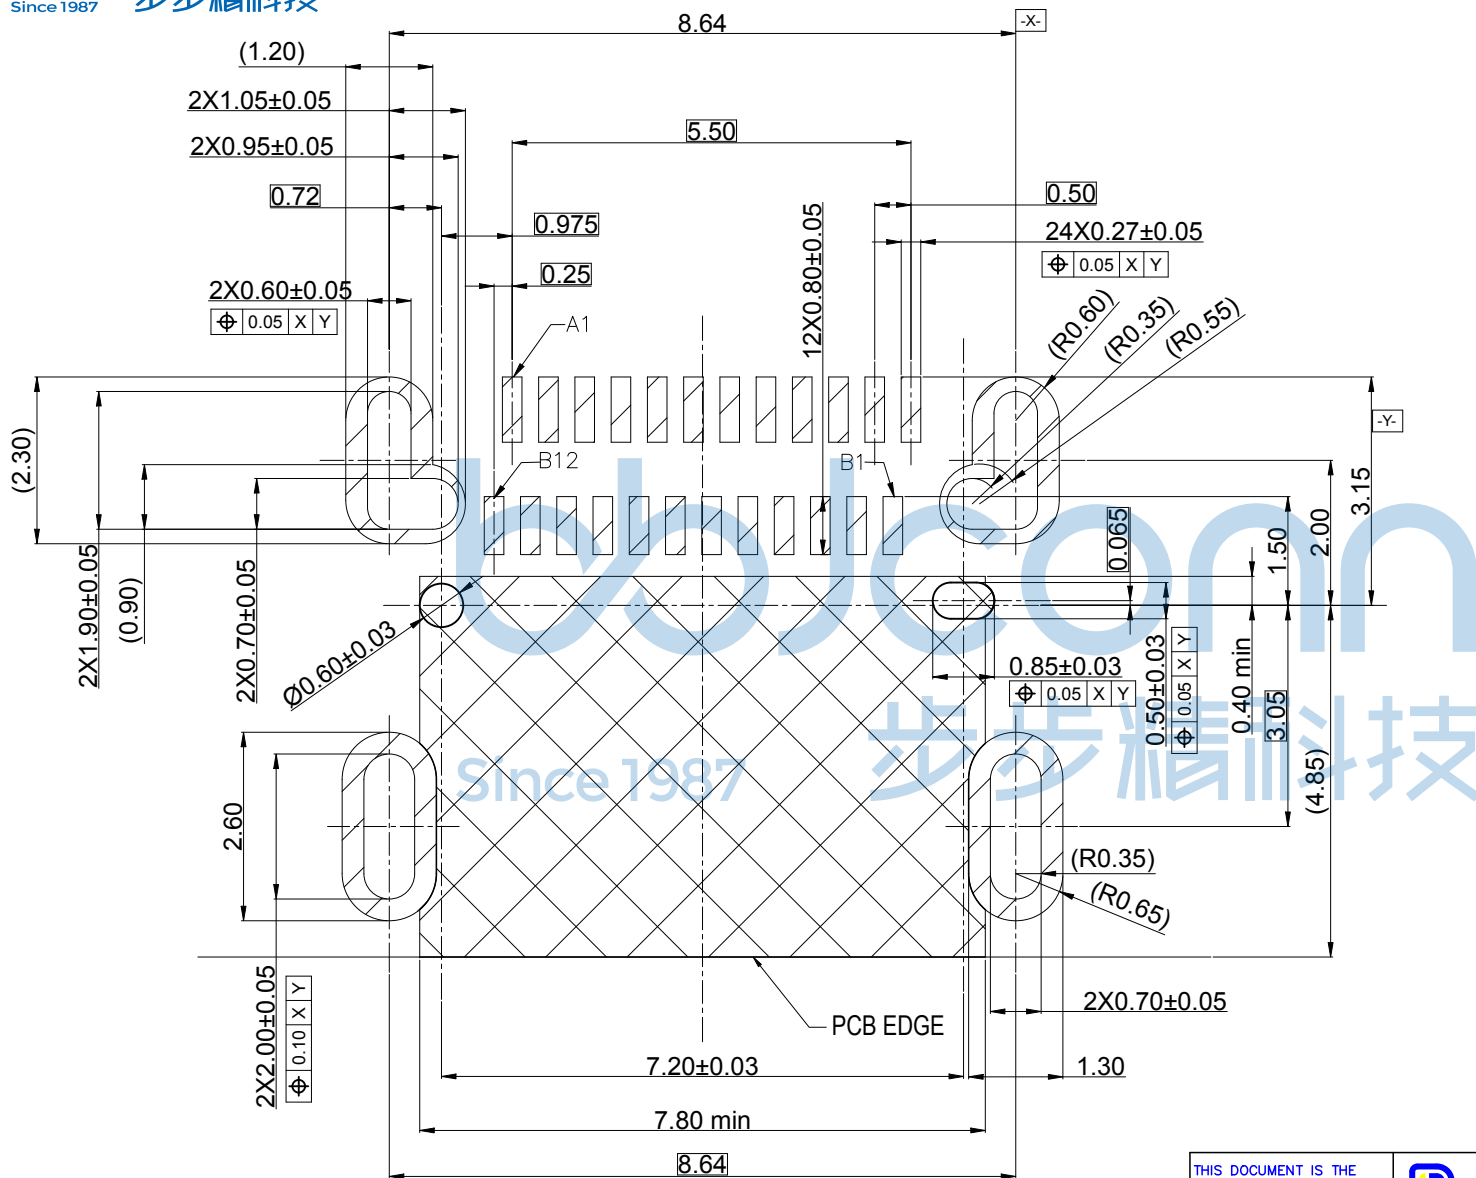

4	TERMINAL	24	COPPER ALLOY XYK-40(C18140)	MATING SIDE: Au1u" SOLDER TAIL: Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	SHELL	1	SUS304	30U" NICKEL PLATING	T=0.30
2	MID PLATE	1	SUS301	30U" NICKEL PLATING	T=0.15
1	MAIN HOUSING	1	HIGH TEMPERATURE	PA9T UL94 V-0, BLACK	UL94V-0
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	REMARK
BILL OF MATERIAL					

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0470-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME: U4 40G速率 TYPE-C 24P 母座 有后盖 单壳 板上四脚
插 带柱 端子双排SMT 外壳脚长1.20 L=9.17 CH=1.57 编带

APPD.	JM_Zheng
-------	----------

	PJ. NO.: 126-221-160016-U4G
---	-----------------------------


CHKD. LYX

SIZE: A4		DRW NO.:	
FINISH: SEE NOTES		MATERIAL: SEE NOTES	


DR.	TSP
-----	-----

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/3
------------	----------	----------	-----------


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

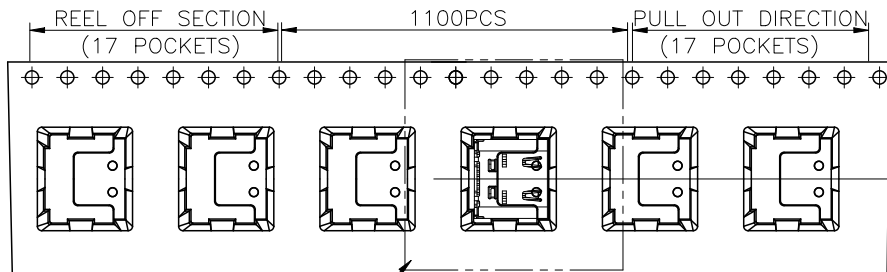

SEE DETAIL X

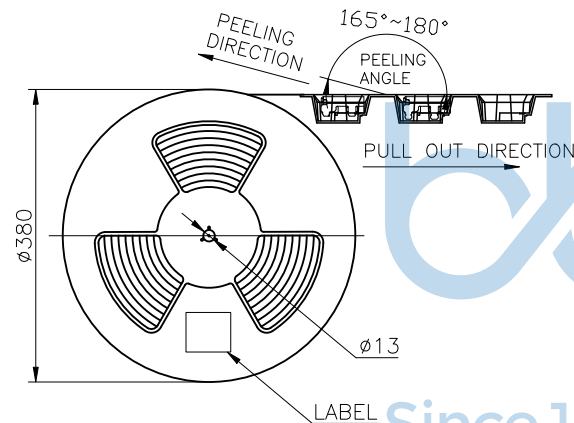

W+0.5

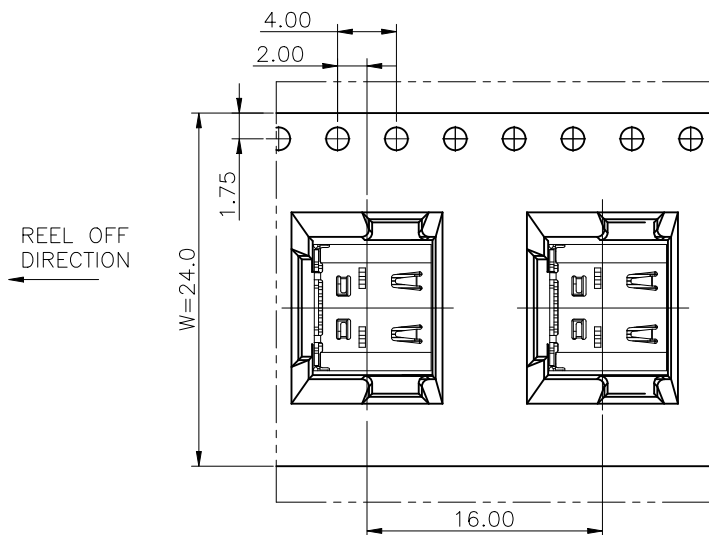


PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

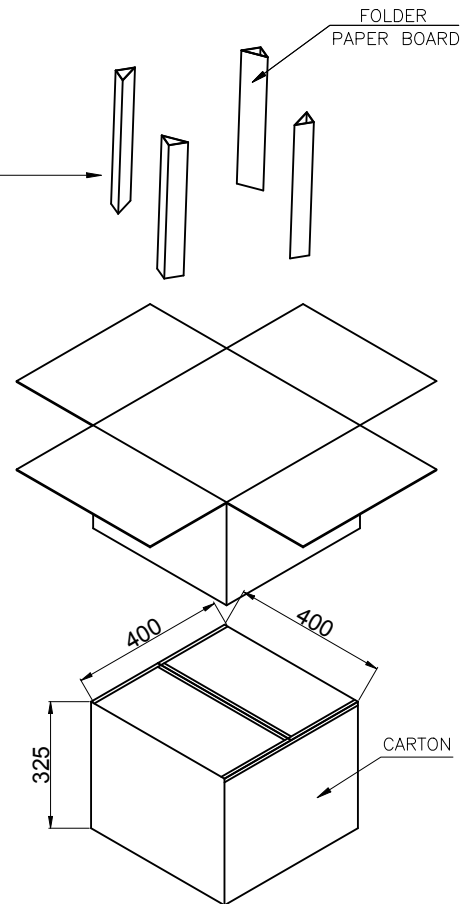

	REEL	CARTON
CONNECTOR (PCS)	1100	11000



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	.X*: ±3"	NAME: U4 40G速率 TYPE-C 24P 母座 有后盖 单壳 板上四脚 插 带柱 端子双排SMT 外壳脚长1.20 L=9.17 CH=1.57 编带	
.XX: ±0.25	.X*: ±2"		
.XXX: ±0.13	.XX*: ±1"		
APPD.	JM_Zheng	PJ. NO.: 126-221-160016-U4G	
CHKD.	LYX	SIZE: A4	DRW NO.:
PDWG.NO:	0470-1	FINISH: SEE NOTES	MAT'L.: SEE NOTES
	TSP	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 3/3